

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Expeditor

Cod articol :

60191228

Customer pos. no.:

Articol:

FEKA FXV 20.11 T-NA 400 V

Tip de instalatie:

Wet - Pump only

Date pompa

Free passage : 50 mm

Max. immersion depth : 7 m

Temperatura min. fluid 0 °C

Temperatura max. fluid 50 °C

Date de functionare cerute

Debit :

Inaltime de pompare :

Fluid pompat : Apă

Temperatura fluid: 20 °C

Densitate 998.3 kg/m³

Vascozitate cinematica: 1.005 mm²/s

Presiune de vapori: 2.34 kPa

Date disponibile:

Debit :

Inaltime de pompare :

Materiale

Maner Fonta EN GJL 200

Pump body / motor Fonta EN GJL 200

Rotor Cast iron (EN GJL 250)



Etansare mec. completa pe partea pompei SiC-SiC/SiC-C

Etansare mec. completa pe partea motorului G/C/Carbon

Garnitura OR NBR

Arbore motor Stainless Steel AISI 431

Curve tolerance according to ISO 9906

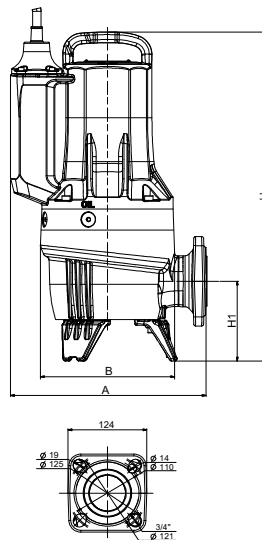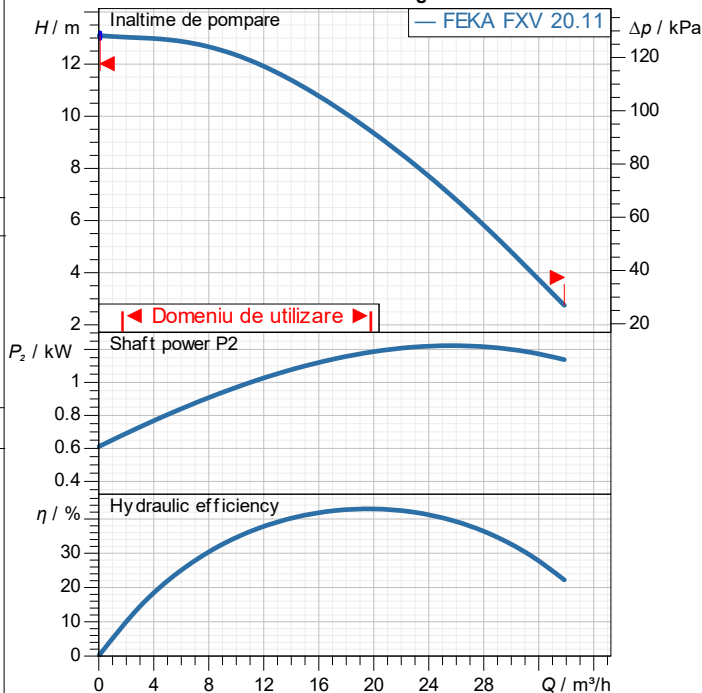

Date motor

Marca : DAB

Putere nominala P2: 1.2 kW

Viteza nominala: 2870 1/min

Tensiune nominala : 3~ 400 V

50 Hz

Curent nominal : 2.9 A

Grad de protectie: IP 68

Masa

Accessory weight :

Dimensiuni de gabarit mm

A 307
B 211
DN1 50
GAS Rp 2"
H 464
H1 104

Racorduri pompa:

Partea cu aspiratia: --

Partea cu refularea: Rp 2" - DN 50 PN10/6


Destinatar

Expedito

Firma
Referinta
Adresa
Phone
Fax
E-mail

FEKA FXV 20.11 T-NA 400 V

Curve tolerance according to ISO 9906

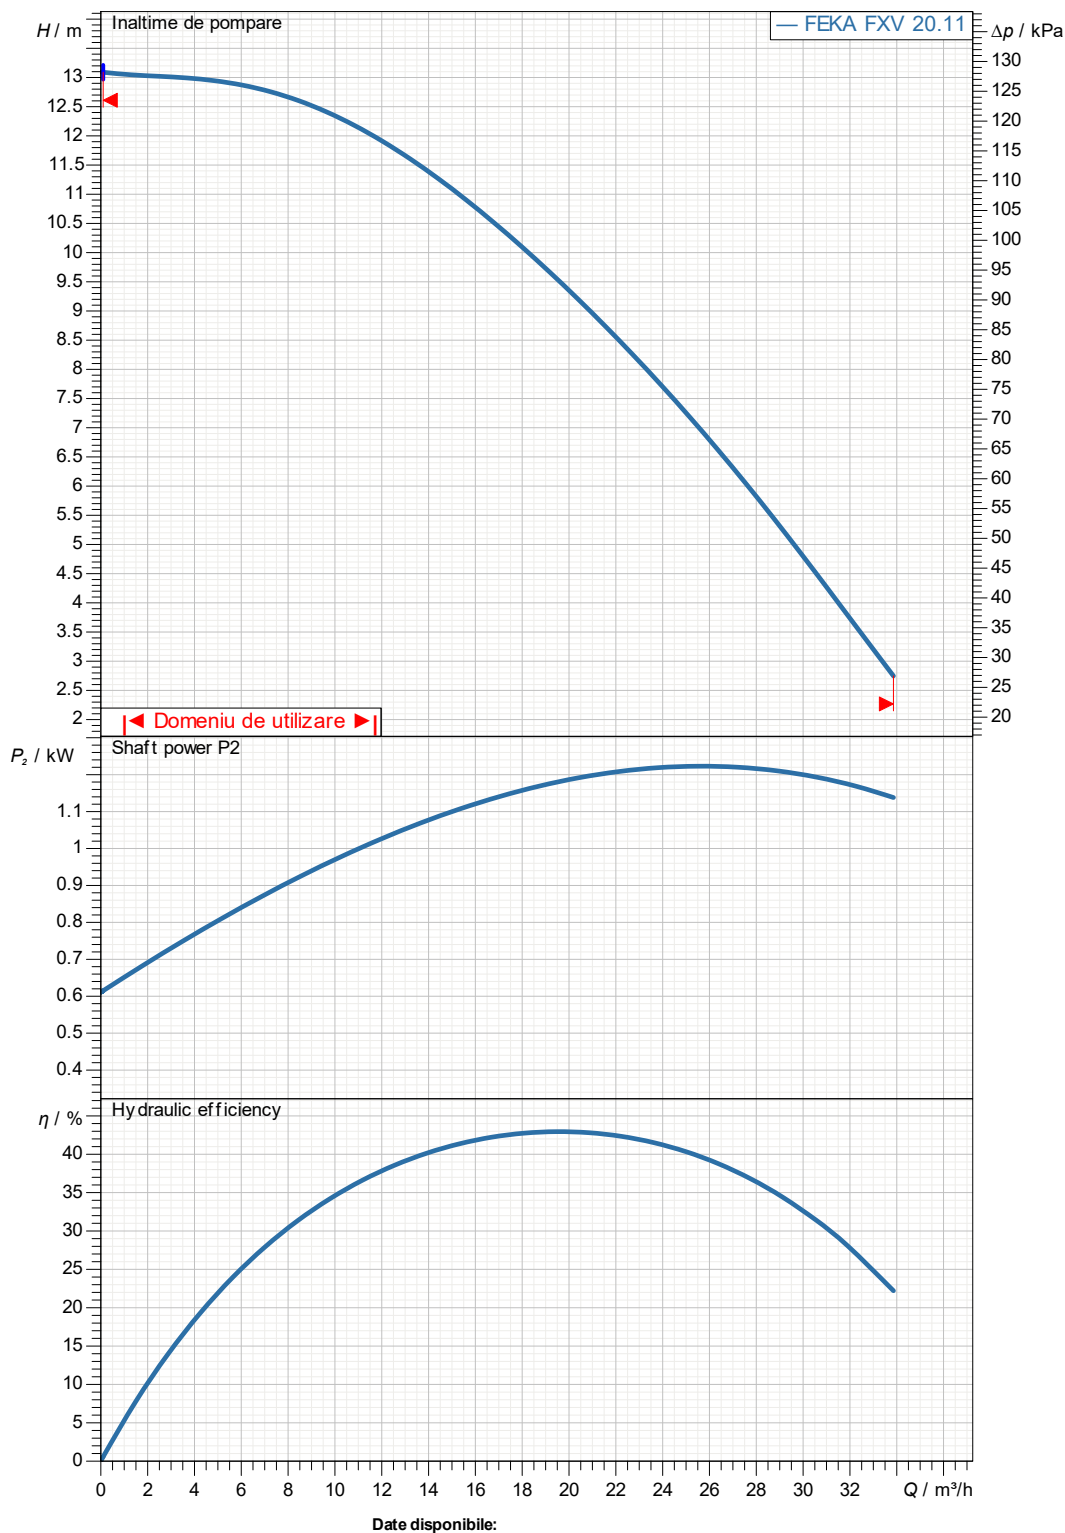

Date disponibile:

Partea cu aspiratia:

Partea cu refularea:
Rp 2" - DN 50 PN10/6
--

Debit :

Înaltime de pompare :

Viteza nominala:
2870 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE



01/21/2026

Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

FEKA FXV 20.11 T-NA 400 V

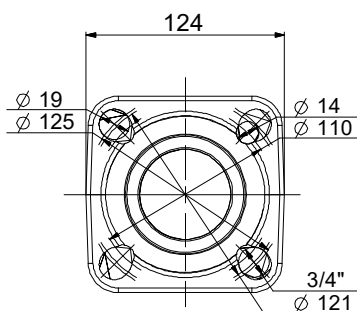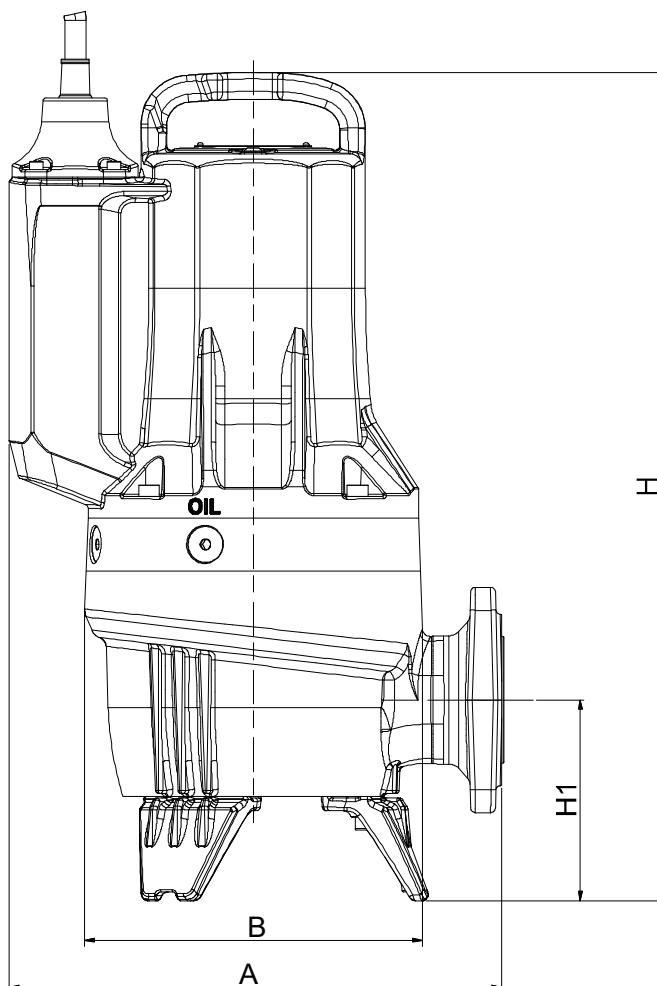

Dimensiuni in mm

Racorduri pompa:

1
2
3
4
5
6
7
8
9
10
11

A
B
DN1
GAS
H
H1

307
211
50
Rp 2"
464
104

Aspiratie

Refulare

Rp 2" - DN 50 PN10/6

--

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

01/21/2026