

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Cod articol :

60213263H

Customer pos. no.:

Articol:

KPS 30/16 PS 1x230 50 IE2

Date pompa

Diametru rotor:

Presiune nominala: 600 kPa

Temperatura min. fluid -10 °C

Temperatura max. fluid 50 °C

Temperatura max. ambianta 40 °C

Date de functionare cerute

Debit :

Inaltime de pompare :

Fluid pompat : Apă

Temperatura fluid: 20 °C

Densitate 998.3 kg/m³

Vascozitate cinematica: 1.005 mm²/s

Presiune de vapori: 2.34 kPa

Date disponibile:

Debit :

Inaltime de pompare :

Materiale

Corp pompa Cast iron GG20/GJL200 UNI EN 1561

Rotor Alama P Cu Zn40 Pb2 UNI 5705/65



Arbore motor AISI 416 X12 CrS 13 UNI 6900/71

Garnitura OR NBR

Capac Alama P Cu Zn40 Pb2 UNI 5705/65

Etansare mecanica Carbon/Ceramica

Curve tolerance according to ISO 9906

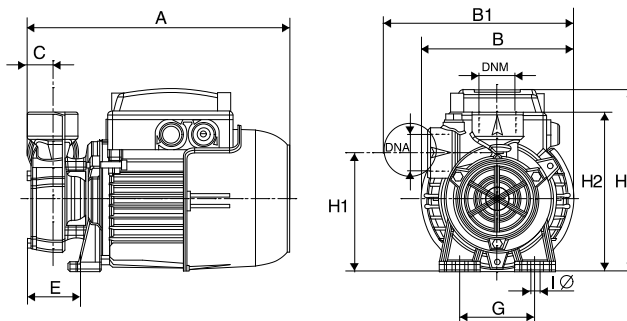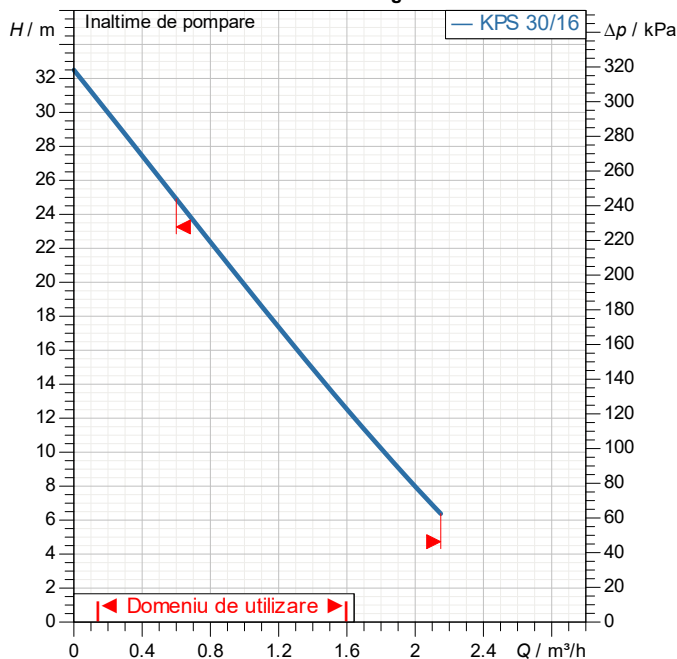

Masa 5.3 kg

Date motor

Marca : DAB
Putere nominala P2: 0.25 kW
Viteza nominala: 2930 1/min
Tensiune nominala : 1~ 230 V 50 Hz
Curent nominal : 2.1 A
Grad de protectie: IP 44

Dimensiuni de gabarit mm

A 228
B 132
B1 165
C 22
DNA 1" G
DNM 1" G
E 46
G 65
H 158
H1 103
H2 138
IØ 8

Racorduri pompa:

Partea cu aspiratia: 1" G / 600 kPa


Partea cu refularea: 1" G / 600 kPa

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

KPS 30/16 PS 1x230 50 IE2

Curve tolerance according to ISO 9906

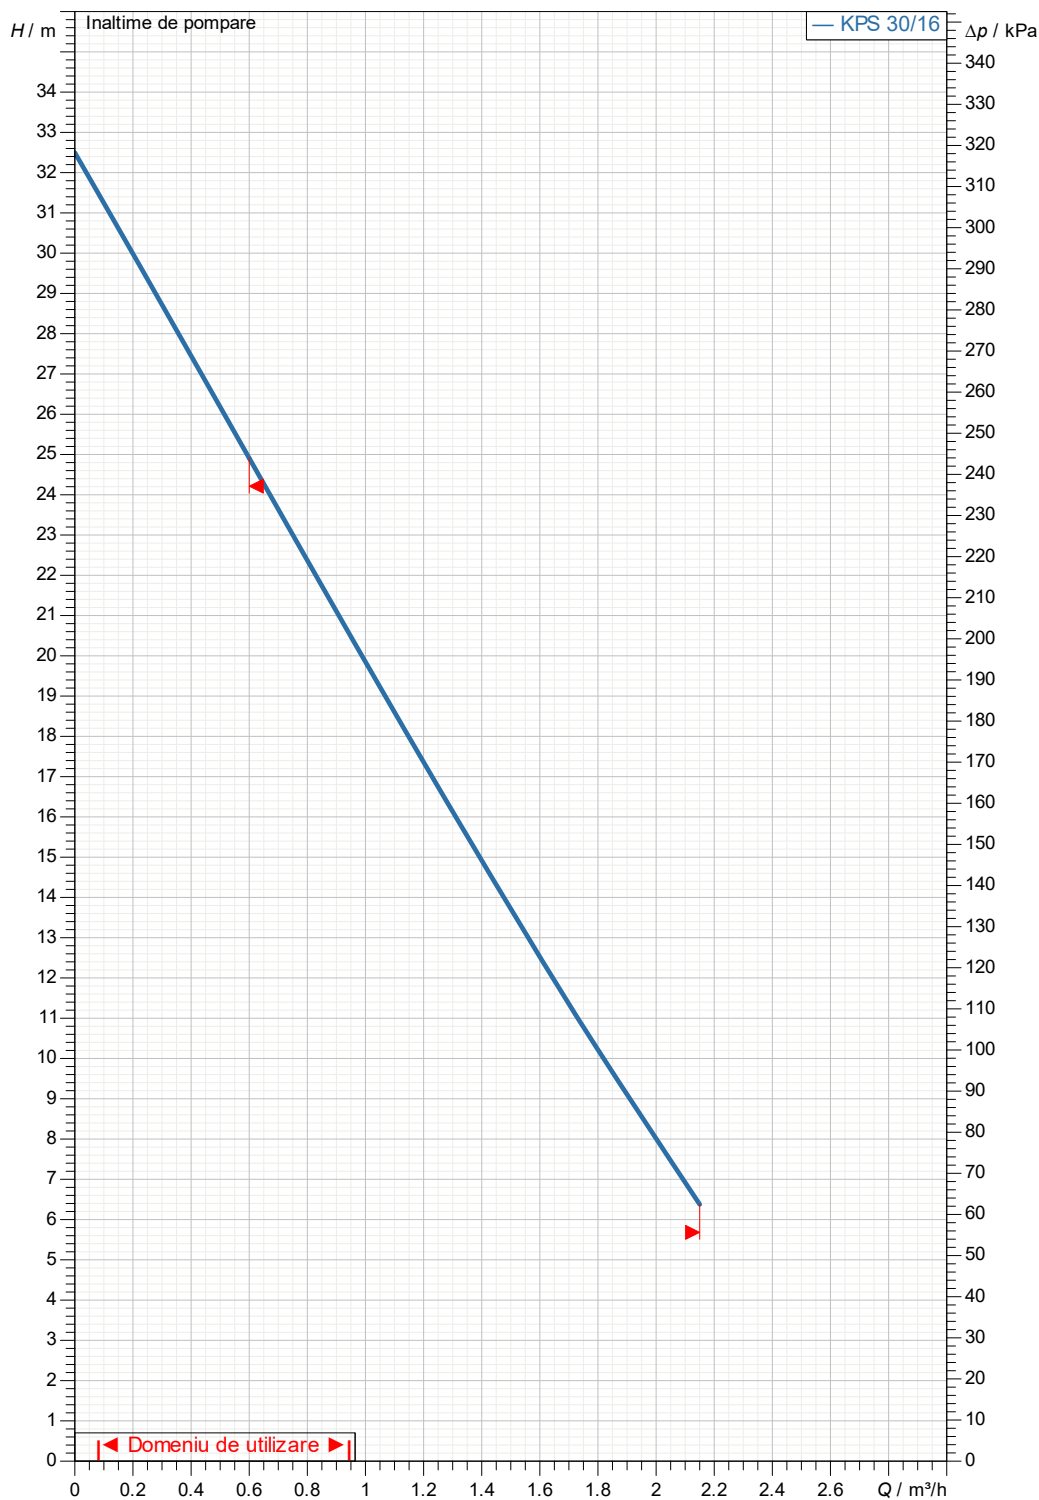

Date disponibile:

Partea cu aspiratia:
1" G
600 kPa

Partea cu refularea:
1" G
600 kPa

Debit :

Înaltime de pompare :

Viteza nominala:
2930 1/min

Oferta

ID oferta

Creat de



Creat

03/10/2026

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

KPS 30/16 PS 1x230 50 IE2

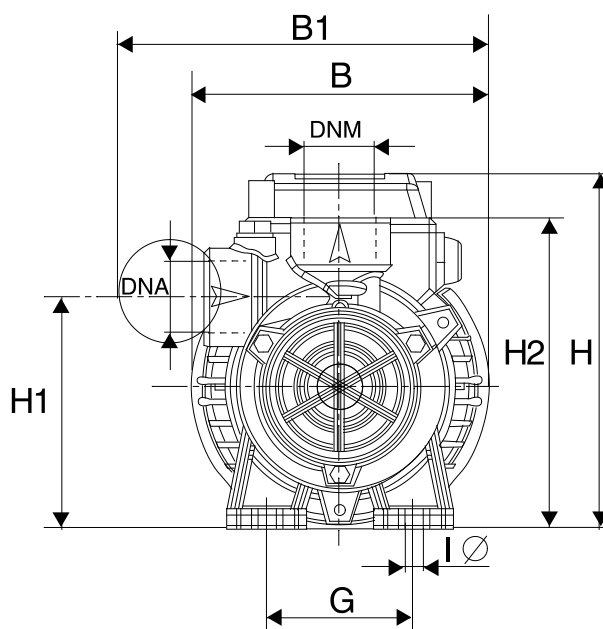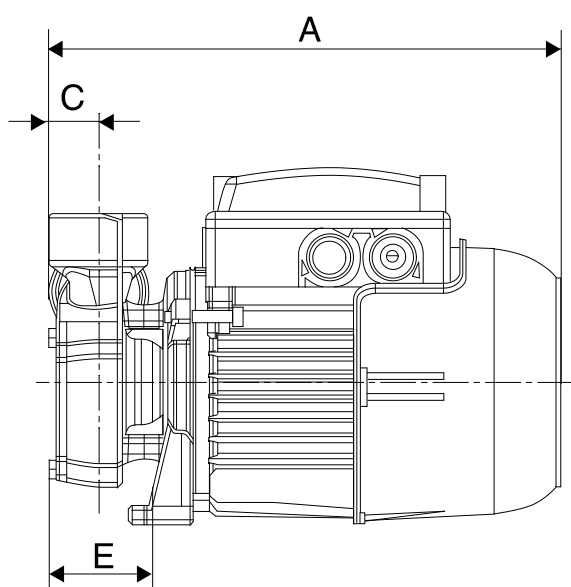

Dimensiuni in mm

Racorduri pompa:

1	A	228	10	8			
2	B	132					
3	B1	165					Aspiratie
4	C	22					1" G
5	DNA	1" G					600 kPa
6	DNM	1" G					
7	E	46					Refulare
8	G	65					1" G
9	H	158					600 kPa
10	H1	103					
11	H2	138					

Oferta

ID oferta

Creat de

Creat

03/10/2026