

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Cod articol : **Customer pos. no.:**

60231355

Articol:

EVOPLUS 40/180 XM

Date pompa

Presiune nominala: 1600 kPa
Temperatura min. fluid: -10 °C
Temperatura max. fluid: 110 °C
EEI: ≤ 0,20

Presiune minima la nivelul apei:

Temperatura: °C 90 100
Presiune minima la nivelul apei: m 20 25

Date de functionare cerute

Debit:
Inaltime de pompare:
Fluid pompat (%):
Temperatura fluid: 20 °C
Densitate: 998.3 kg/m³
Vascozitate cinematica: 1.005 mm²/s
Presiune de vapori: 2.34 kPa



Date disponibile:

Debit:
Inaltime de pompare:

Materiale

Corp pompa: Cast iron 250 UNI ISO 185 with Cataphoresis
Rotor: Tecnopolimer
Arbore motor: Alumina
Inel de etansare: EPDM
Carcasa motorului: Die cast aluminium with Cataphoresis
Flansa de inchidere: Otel inox
Suport inel de echilibrare: EPDM

Curve tolerance according to ISO 9906

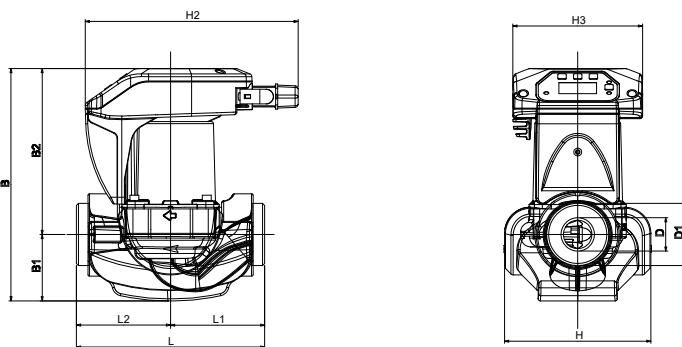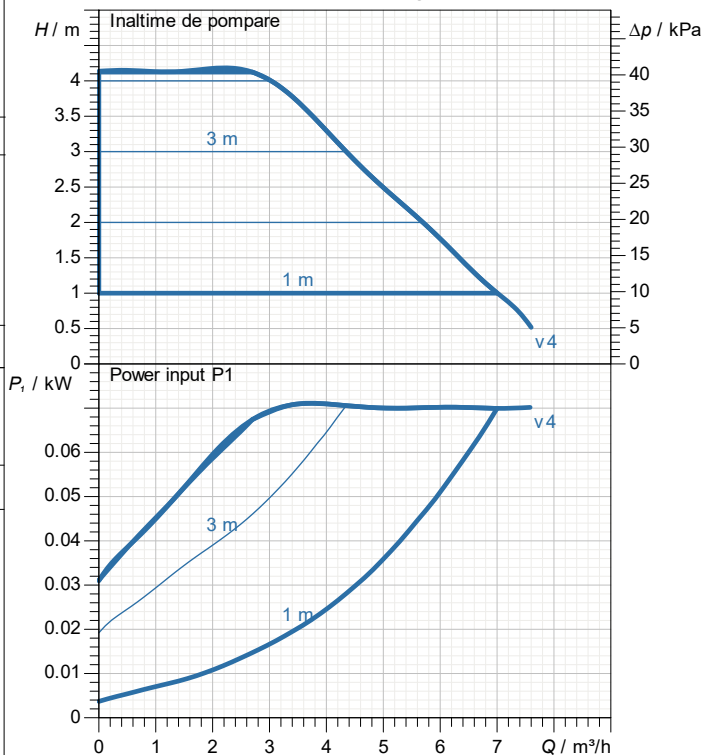

Date motor

Marca: DAB
Max. Power input P1: 0.068 kW
Tensiune nominala: 1~ 220-240 V 50 Hz
Curent nominal: 0.51 A
Grad de protecție: IP 44

Dimensiuni de gabarit mm

B	224	H1	124				
B1	65	H2	204				
B2	159	L	180				
D	32	L1	90				
D1	2" G	L2	90				
H	124						

Masa 4.7 kg

Racorduri pompa:


Partea cu aspiratia: 2" G
Partea cu refularea: 2" G

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS 40/180 XM

Curve tolerance according to ISO 9906

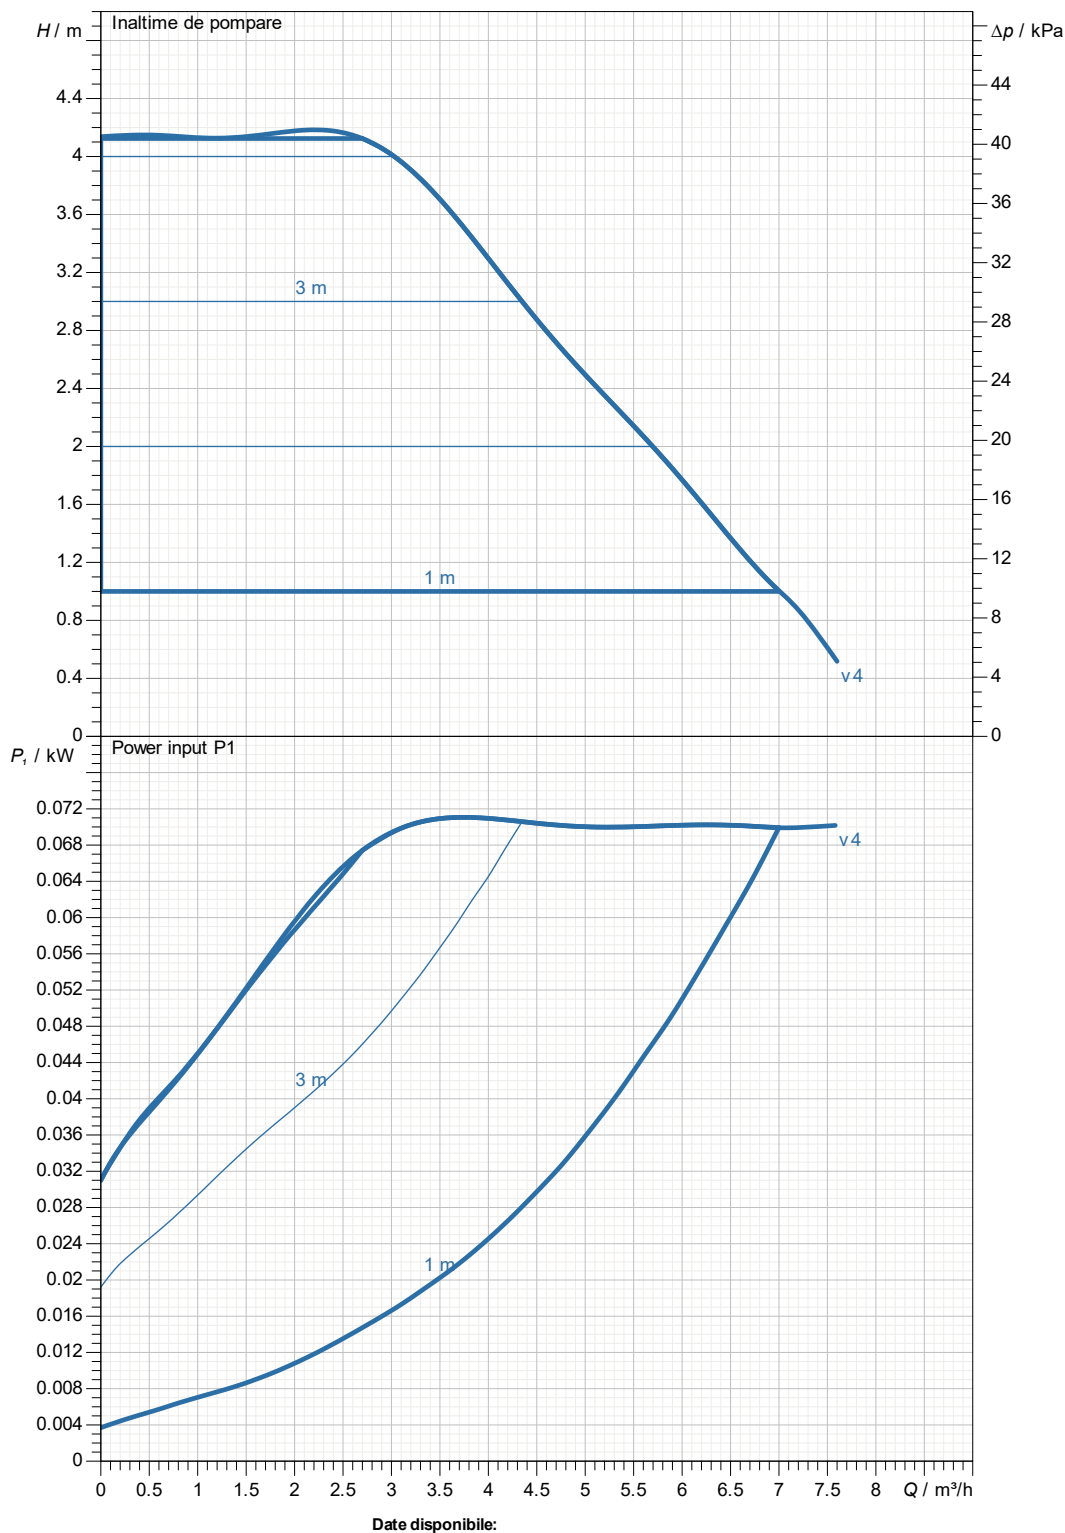

Date disponibile:

Partea cu aspiratia:

2" G
1600 kPa

Partea cu refularea:

2" G
1600 kPa

Debit :

Înaltime de pompare :

Viteza nominala:

2900 1/min

Oferta

ID oferta



Creat de

Creat

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS 40/180 XM

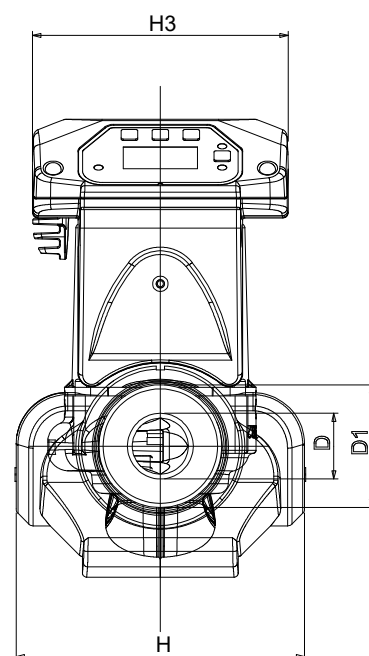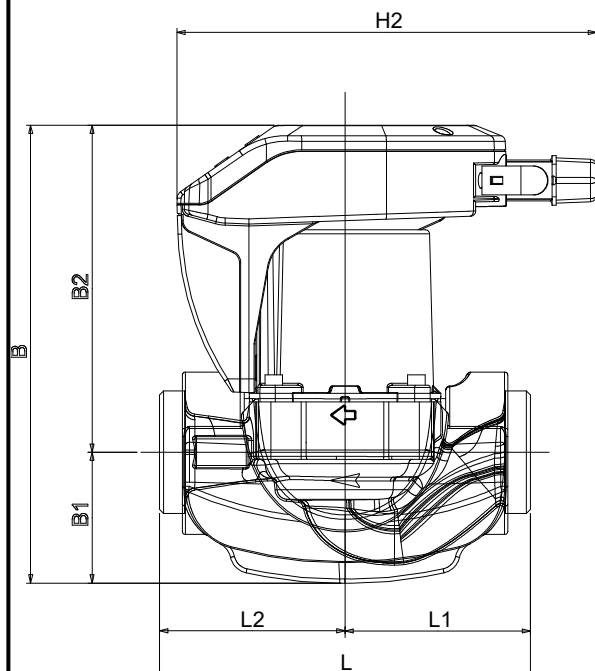

Dimensiuni in mm

Racorduri pompa:

1	B	224					
2	B1	65					Aspiratie
3	B2	159					2" G
4	D	32					1600 kPa
5	D1	2" G					
6	H	124					Refulare
7	H1	124					2" G
8	H2	204					1600 kPa
9	L	180					
10	L1	90					
11	L2	90					

Oferta	ID oferta	Creat de	Creat
--------	-----------	----------	-------