

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Cod articol : **Customer pos. no.:**

60231443

Articol:

EVOPLUS B 120/220.32 SAN M

Date pompa

Presiune nominala: 1600 kPa
Temperatura min. fluid: -10 °C
Temperatura max. fluid: 110 °C
EEI: ≤ ***

Presiune minima la nivelul apei:

Temperatura: °C 90 100
Presiune minima la nivelul apei: m 20 25

Date de functionare cerute

Debit:
Înălțime de pompare:
Fluid pompat (%):
Temperatura fluid: 20 °C
Densitate: 998.3 kg/m³
Vascozitate cinematica: 1.005 mm²/s
Presiune de vapori: 2.34 kPa



Date disponibile:

Debit:
Înălțime de pompare:

Materiale

Corp pompa: Bronz
Rotor: Tecnopolimer
Arbore motor: Otel inox
Inel de etansare: EPDM
Carcasa motorului: Die cast aluminium with Cataphoresis
Flansa de inchidere: Otel inox
Suport inel de echilibrare: Otel inox

Curve tolerance according to ISO 9906

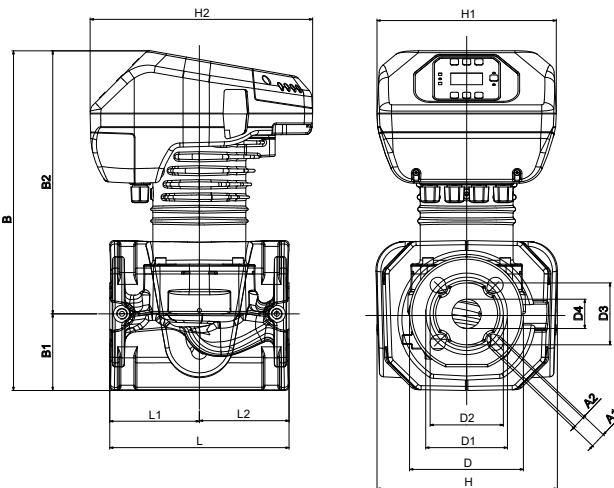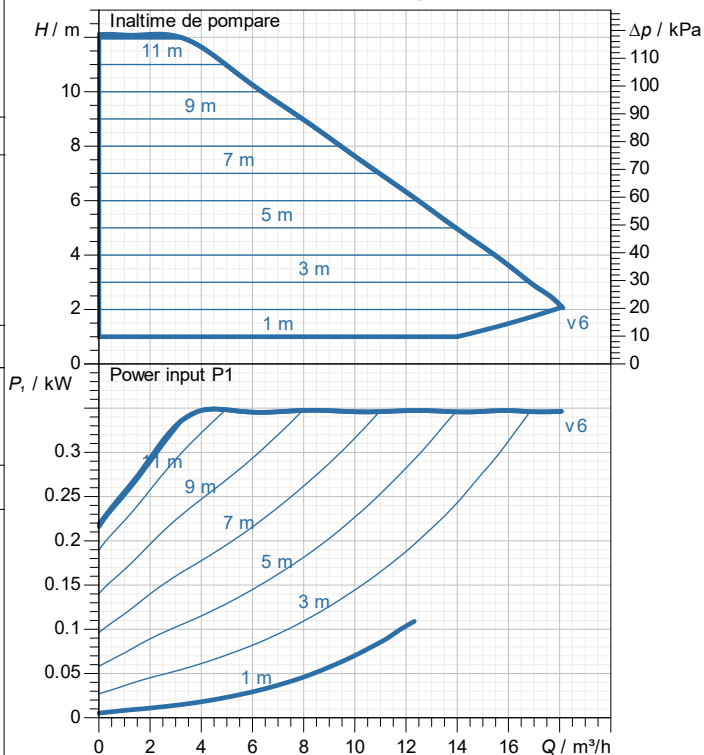

Date motor

Marca: DAB
Max. Power input P1: 0.34 kW
Tensiune nominala: 1~ 220-240 V 50 Hz
Curent nominal: 1.7 A
Grad de protecție: IP 44

Dimensiuni de gabarit mm

A1	19	D1	100	H2	273		
A2	14	D2	90	L	220		
B	417	D3	76	L1	110		
B1	94	D4	36	L2	110		
B2	323	H	222				
D	140	H1	220				

Masa 24 kg

Racorduri pompa:


Partea cu aspiratie: DN 32 / PN 16
Partea cu refularea: DN 32 / PN 16

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS B 120/220.32 SAN M

Curve tolerance according to ISO 9906

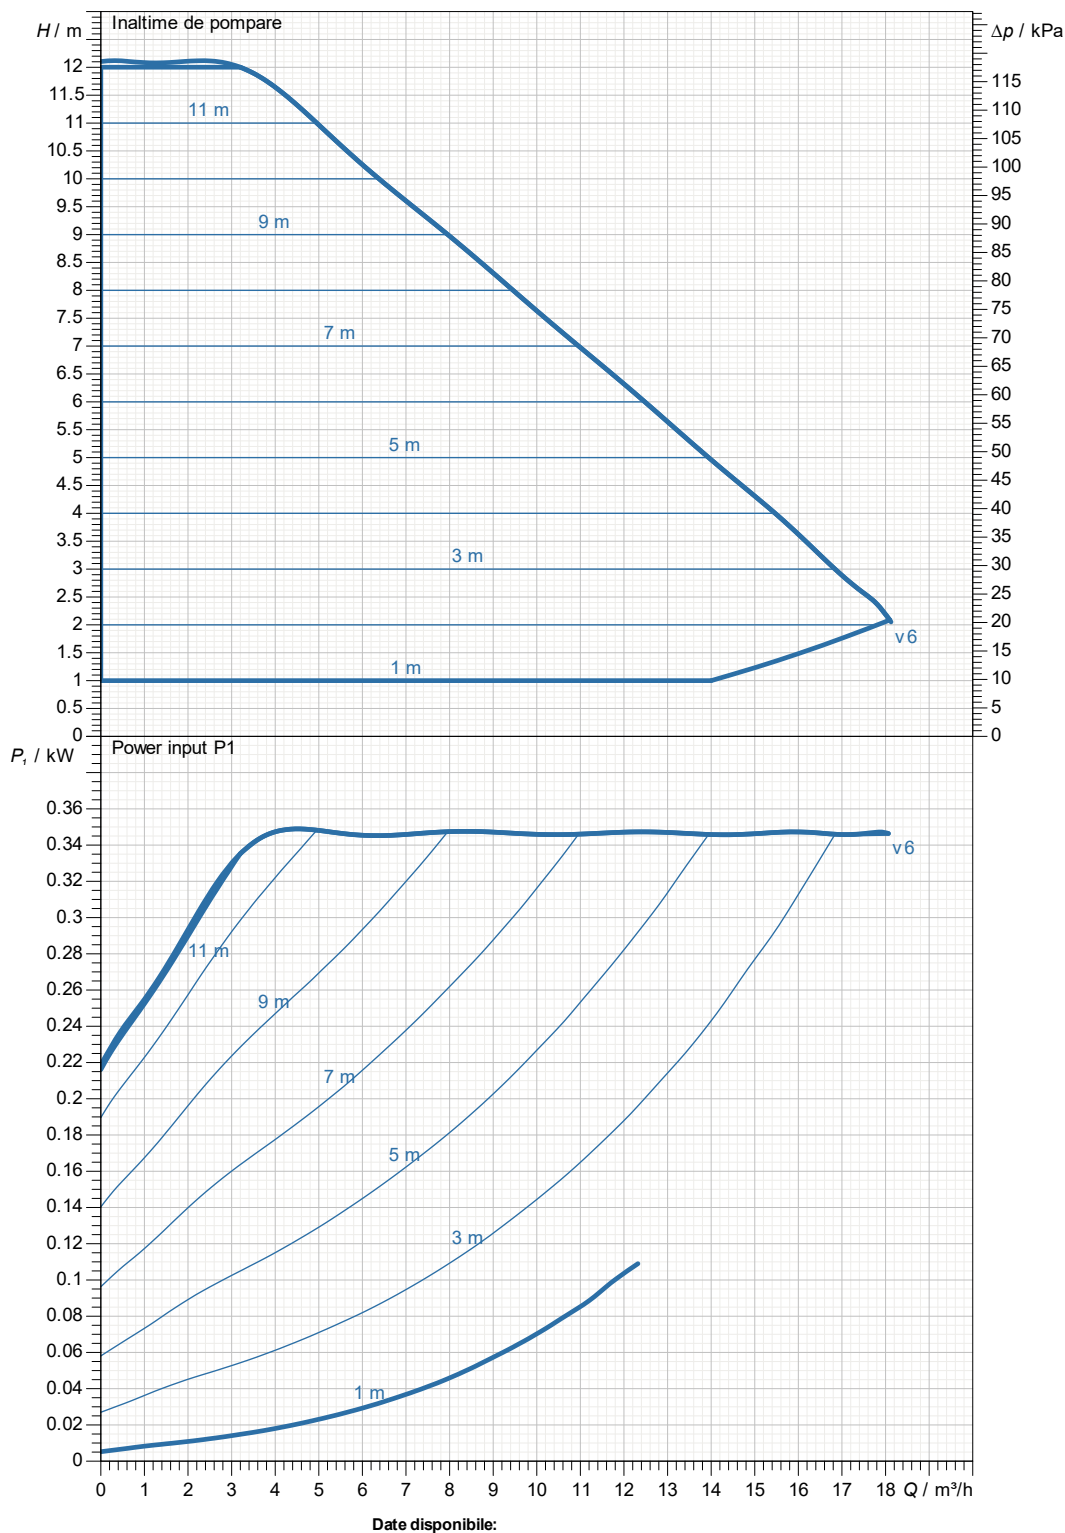

Partea cu aspiratia:

DN 32

PN 16

Partea cu refularea:

DN 32

PN 16

Debit :

Înaltime de pompare :

Viteza nominala:

4900 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID


OWNER_

ISSUE_DATE

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS B 120/220.32 SAN M

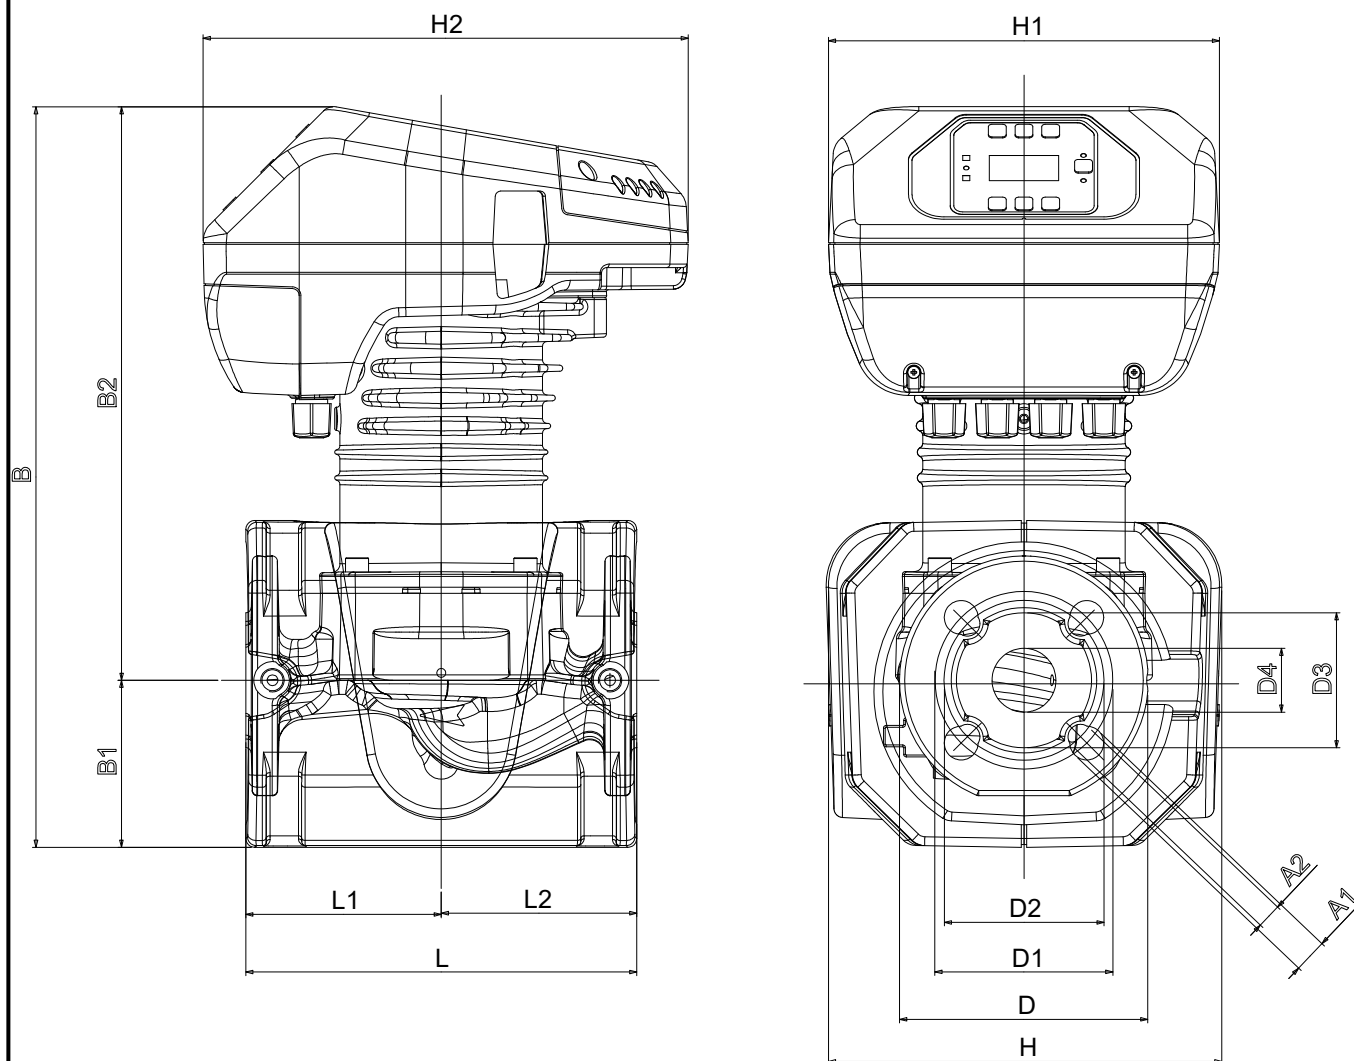

Dimensiuni in mm

Racorduri pompa:

1
2
3
4
5
6
7
8
9
10
11

A1
A2
B
B1
B2
D
D1
D2
D3
D4
H

19
14
417
94
323
140
100
90
76
36
222

H1
H2
L
L1
L2

220
273
220
110
110

Aspiratie
DN 32
PN 16

Refulare
DN 32
PN 16

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE