

Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

Cod articol :

60185581H

Customer pos. no.:

Articol:

GENIX WL 130

Date pompa

Temperatura min. fluid	0 °C
Temperatura max. fluid	50 °C
Temperatura max. ambienta	25 °C
Temperatura min. ambienta	5 °C
MaxFlow :	6.9 m³/h
Max Head :	8 m
Max Head (EN12050-3) :	6 m

Date de functionare cerute

Debit :	
Înălțime de pompare :	
Fluid pompat :	Apă
Temperatura fluid:	20 °C
Densitate	998.3 kg/m³
Vascozitate cinematica:	1.005 mm²/s
Presiune de vapori:	2.34 kPa

Date disponibile:

Debit :
Înălțime de pompare :

Materiale



Rotor	Polypropylene 30% fiber glass
Cisterna	Polypropylene 15% Barium
Arbore	Otel inox
Cover	Otel inox
Grinder	AISI 304/420
Soundproofing (COMFORT)	Polypropylene 70% Barium
Garnitura OR	NBR

Date motor

Marca :	DAB
Putere nominala P2:	0.32 kW
Viteza nominala:	2900 1/min
Tensiune nominala :	1~ 230 V
Curent nominal :	2.3 A
Grad de protecție:	IP 44

50 Hz

Curve tolerance according to ISO 9906

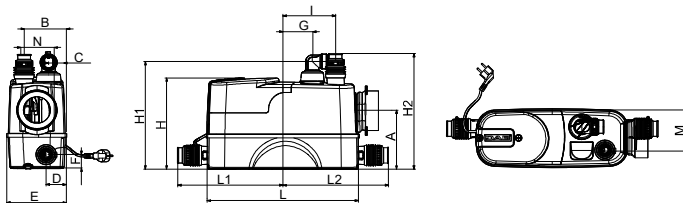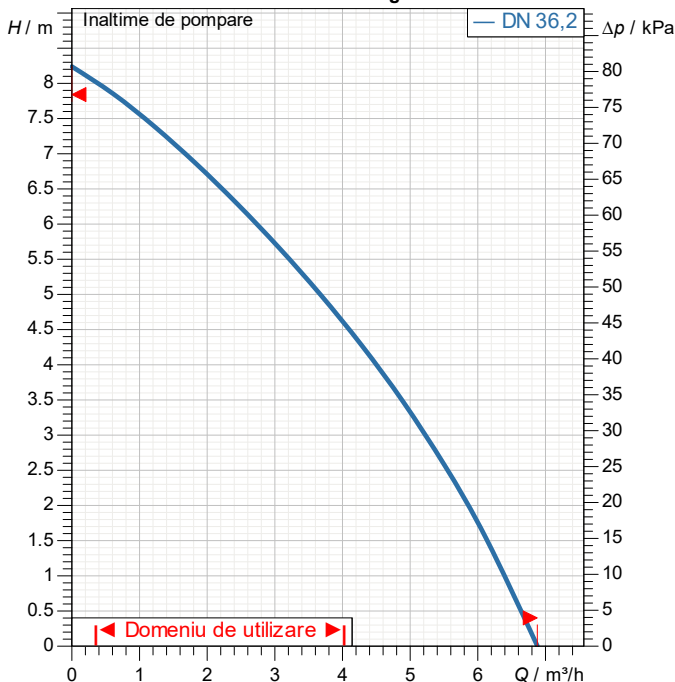

Masa 10.3 kg

Dimensiuni de gabarit mm

A	183	G	178	L1	322		
B	118	H	277	L2	307		
C	45	H1	323	M	118		
D	60	H2	351	N	87		
E	178	I	170				
F	42	L	456				

Racorduri pompa:

DN 22/25/28/32/36/40


Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

GENIX WL 130

Curve tolerance according to ISO 9906

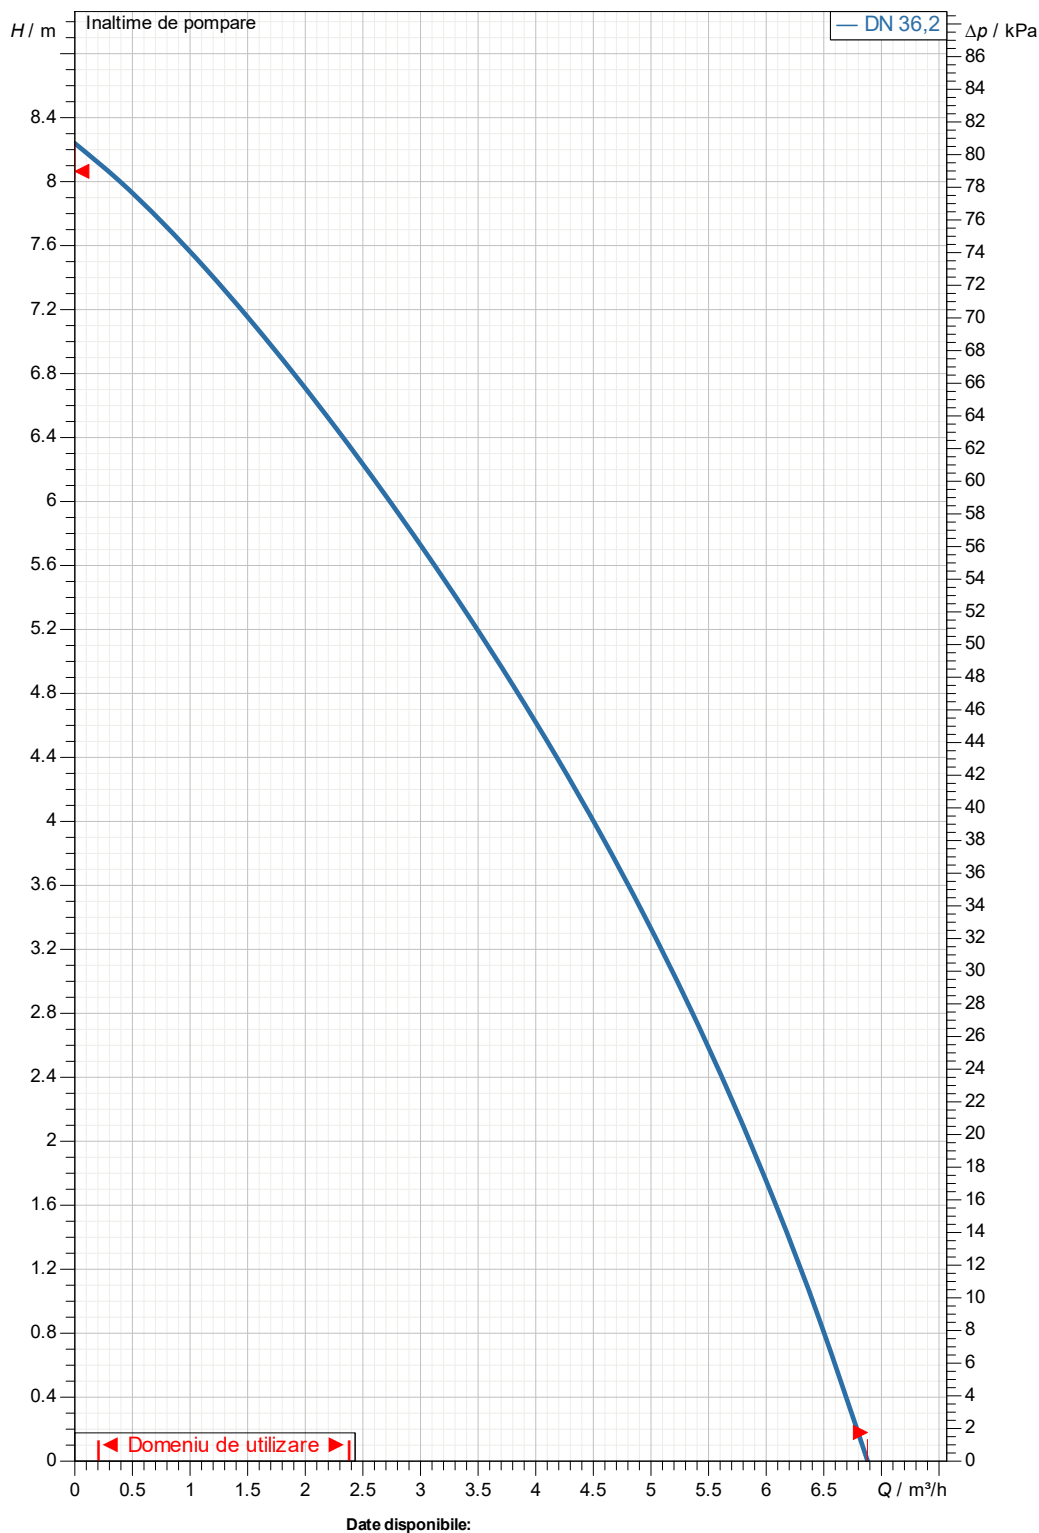

Partea cu aspiratia:

Partea cu refularea:

Debit :

Înaltime de pompare :

Viteza nominala:
2900 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_




ISSUE_DATE

Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

GENIX WL 130

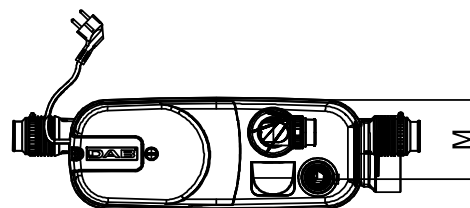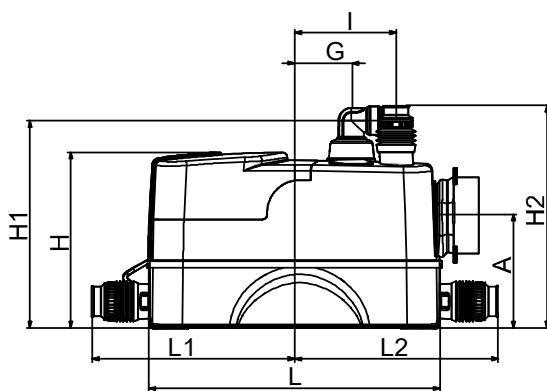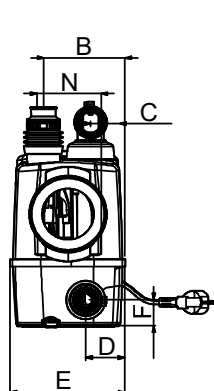

Dimensiuni in mm

Racorduri pompa:

1	A	183	L	456				
2	B	118	L1	322				Aspiratie
3	C	45	L2	307				
4	D	60	M	118				
5	E	178	N	87				
6	F	42						
7	G	178						
8	H	277						Refulare
9	H1	323						
10	H2	351						
11	I	170						

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE