

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Cod articol :

60194400H

Customer pos. no.:

Articol:

NOVA 300 M-A 40th - 5m

Date pompa

Free passage : 10 mm
Aspiration level minimum : 100 mm
Max. immersion depth : 7 m
Temperatura min. fluid 0 °C
Temperatura max. fluid 35 °C

Date de functionare cerute

Debit :
Inaltime de pompare :
Fluid pompat : Apă
Temperatura fluid: 20 °C
Densitate 998.3 kg/m³
Vascozitate cinematica: 1.005 mm²/s
Presiune de vapori: 2.34 kPa

Date disponibile:

Debit :
Inaltime de pompare :



Materiale

Corp pompa Tecnopolimer
Rotor Tecnopolimer
Garnitura OR Cauciuc NBR
Arbore rotor Stainless Steel AISI 431
Grila de aspiratie Tecnopolimer
Calota motor AISI 304 X5 Cr Ni 1810 UNI 6900/71
Plutitor Tecnopolimer

Date motor

Marca : DAB
Max. Power input P1 : 0.35 kW
Putere nominala P2: 0.22 kW
Tensiune nominala : 1~ 230 V 50 Hz
Curent nominal : 1.5 A
Grad de protecție: IP 68
Cable length m : 5

Curve tolerance according to ISO 9906

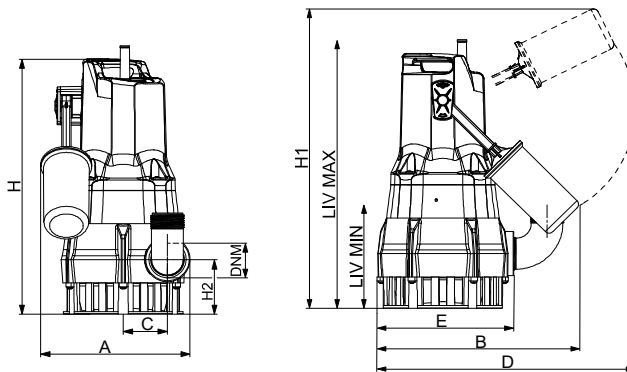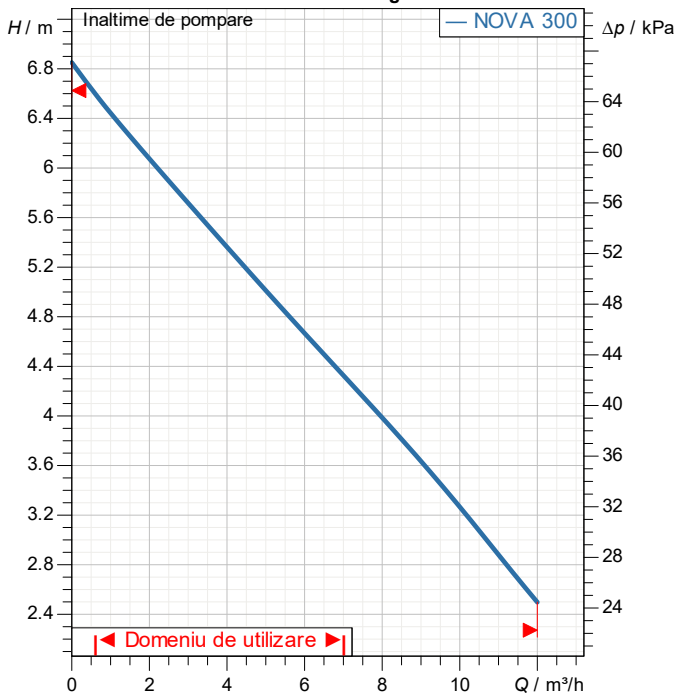

Masa 4.6 kg

Dimensiuni de gabarit mm

A	180	H2	47		
B	247	LIV MAX	285		
C	46	LIV MIN	85		
D	296				
DNM	1"1/4 GAS				
E	158				
H	277				
H1	354				

Racorduri pompa:


Partea cu aspiratia: /
Partea cu refularea: 1" 1/4 GAS / --

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

NOVA 300 M-A 40th - 5m

Curve tolerance according to ISO 9906

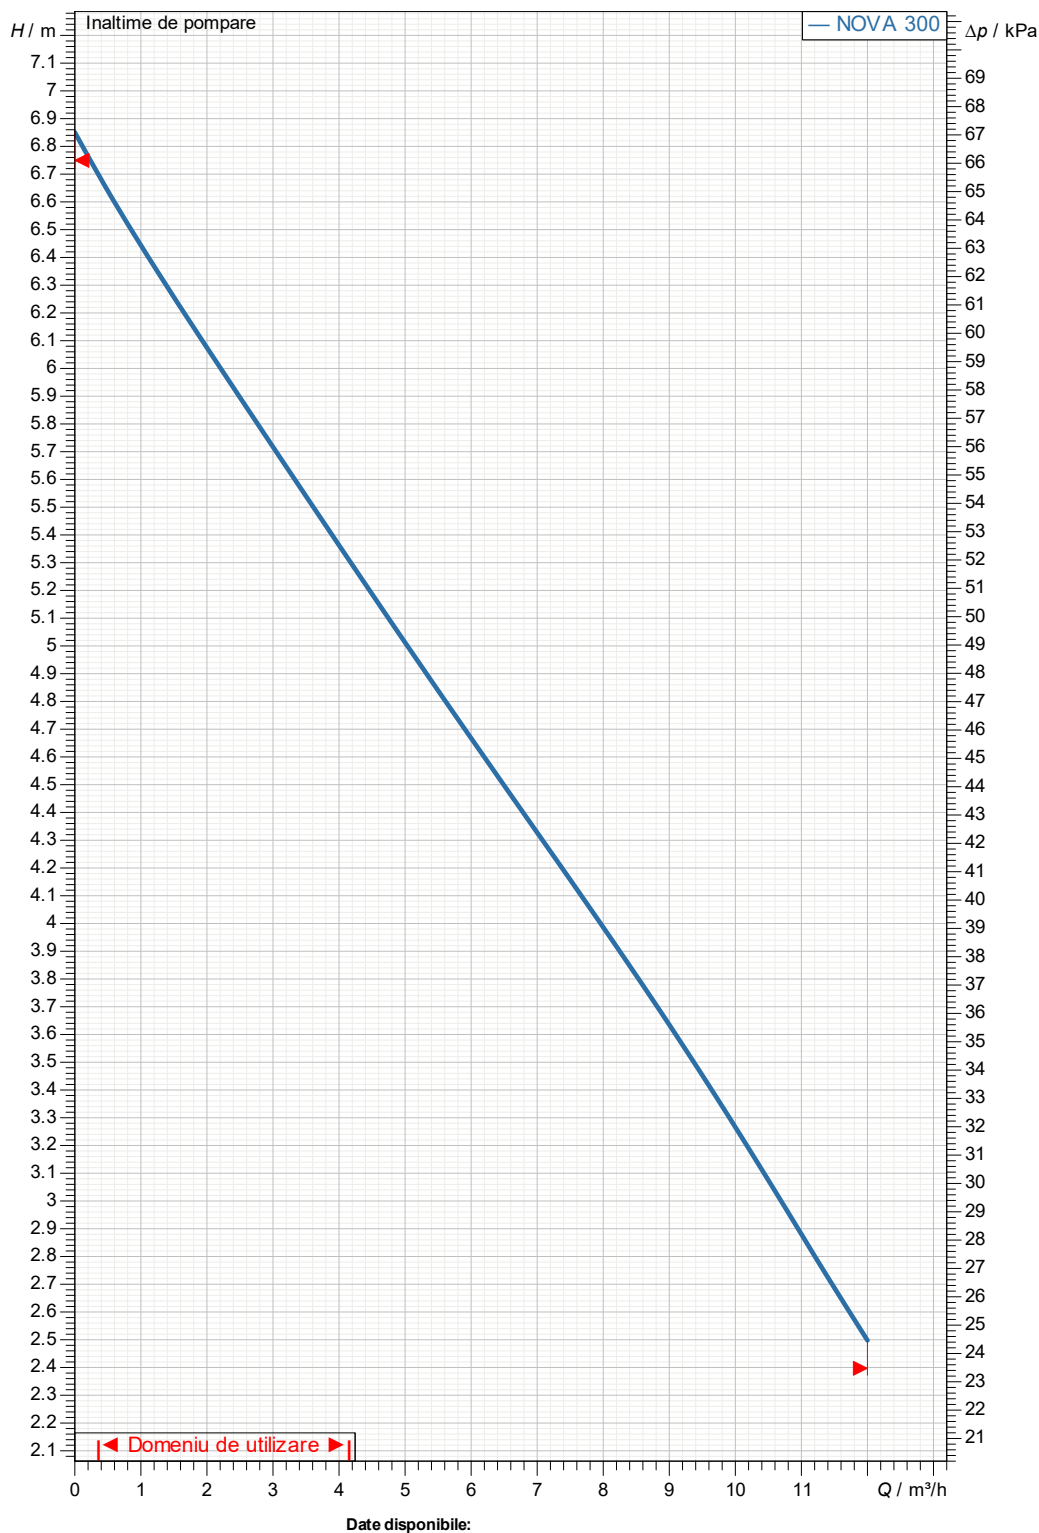

◀ Domeniu de utilizare ▶

Date disponibile:

Partea cu aspiratia:

Partea cu refularea:
1" 1/4 GAS
--

Debit :

Înaltime de pompare :

Viteza nominala:
2900 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_


ISSUE_DATE

04/21/2026

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

NOVA 300 M-A 40th - 5m

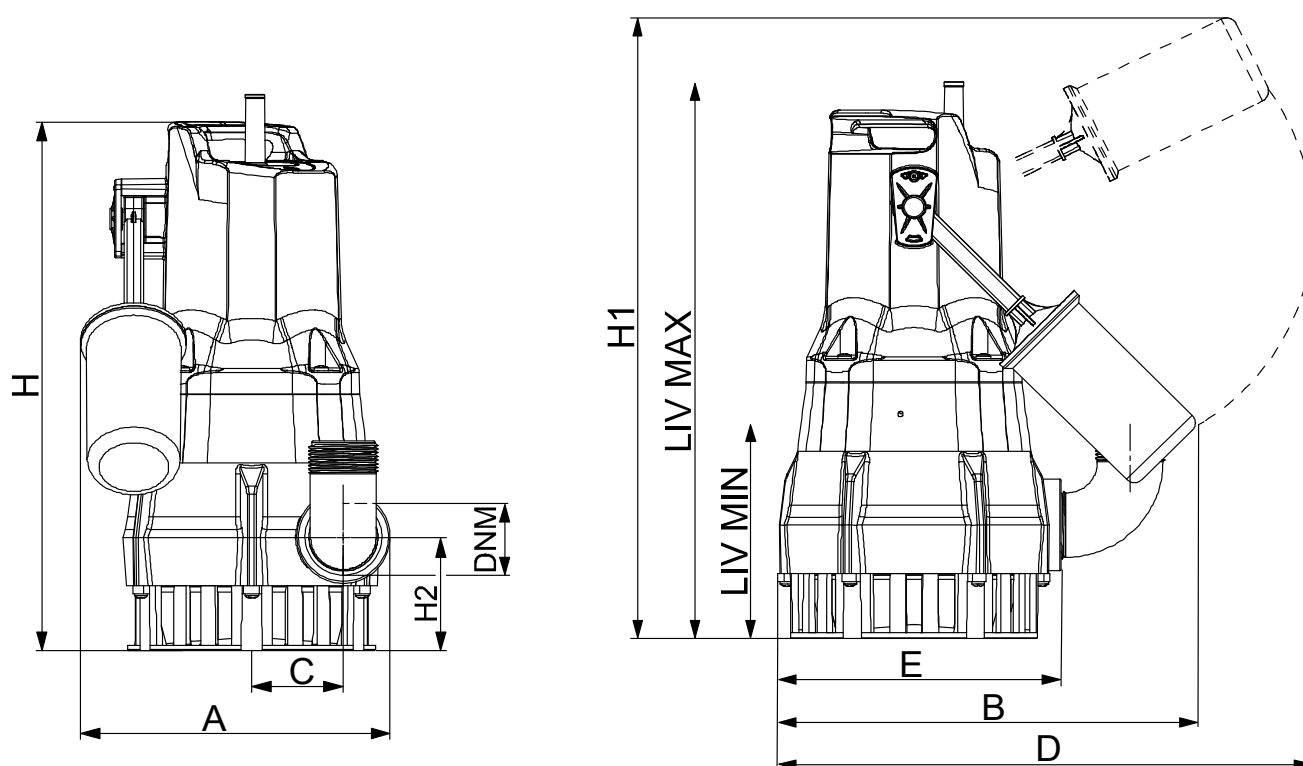

Dimensiuni in mm							Racorduri pompa:	
1	A	180					Aspiratie Refulare 1 " 1/4 GAS --	
2	B	247						
3	C	46						
4	D	296						
5	DNM	1"1/4 GAS						
6	E	158						
7	H	277						
8	H1	354						
9	H2	47						
10	LIV MAX	285						
11	LIV MIN	85						
MAIN_PROJECT_TITLE			BUSINESS_PROCESS_ID			OWNER_		ISSUE_DATE 04/21/2026