

Article number: 02 476 06 99

## Exposed urinal flush valve SCHELLOMAT Basic, DN 15

All-metal design with brass push button. Conform to DIN EN 12541.

### Scope of delivery


- Exposed urinal flush valve
  - Self-closing cartridge with nozzle bore pre-filter
- Urinal internal connector

### Technical data

- Flow pressure: 0.8 - 5.0 bar
- Max. Resting pressure: 8 bar
- Connection: DN 15 G 1/2 AG
- Outlet: Internal connector Ø 43 mm (flush pipe Ø 18 mm)
- Flush volume adjustable: 1.0 - 6.0 l
- Material: Housing Brass; Parts in contact with water Brass, conform to German drinking water regulations, Plastic
- Surface: Chrome
- Certificates: PA-IX 9892/II, DIN-DVGW
- Noise class: II, at 100% flow

### Delivery data

- Weight: 0,70 kg/Piece
- Packing unit: 1

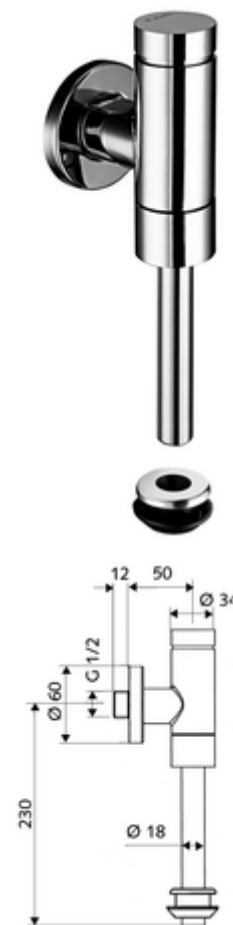

### Recommended associated articles

|                            |                          |    |
|----------------------------|--------------------------|----|
| Flush pipe Ø 18 mm cranked | Article no: 50 223 06 99 | or |
| Urinal external connector  | Article no: 27 820 06 99 |    |
| Urinal module MONTUS       | Article no: 03 090 00 99 |    |