



Advantix Vario Shower channel base unit continuously cut to length

- for bonded sealing (tiled shower) or sealing lane

Scope of supply

adjusting feet set, closing caps, drain set with good self-cleaning property, height-adjustable standing grate holder, height adjustment piece, sealing flange, sealing accessories, saw guide


Note

This drain model in its lowest installation version does not allow for adequate screed covering around the connection pipe. This has to be taken into account by the planning specialist in good time. A possible on-site solution with regard to the tile size and/or possible casting with epoxy resin must be considered in planning!

quality controlled in accordance with DIN EN 1253

Model 4965.10

Article 686 277

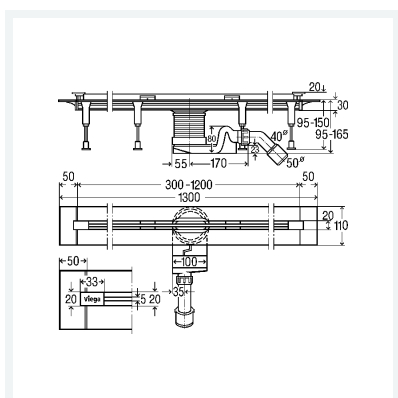

Properties

Water seal height	WSH	50 mm
Drainage capacity 10 mm (in accordance with EN 1253)	DC 10	0.4 l/s
Drainage capacity 20 mm (in accordance with DIN EN 1253)	DC 20	0.8 l/s
Length	L	300–1200
Construction height	CH	95–150
Nominal diameter	DN	40/50
Weight	3307 g	
Volume	35902.944 cm ³	
Material	plastic high-quality	