

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Cod articol : 60182215H
Customer pos. no.:

Articol:
VS 35/150

Date pompa

Presiune nominala: 1000 kPa
Temperatura min. fluid: -10 °C
Temperatura max. fluid: 85 °C

Presiune minima la nivelul apei:

Temperatura : °C
Presiune minima la nivelul apei: m

Date de functionare cerute

Debit :
Inaltime de pompare :
Fluid pompat (%) :
Temperatura fluid: 20 °C
Densitate: 998.3 kg/m³
Vascozitate cinematica: 1.005 mm²/s
Presiune de vapori: 2.34 kPa

Date disponibile:

Debit :
Inaltime de pompare :



Materiale

Corp pompa: Bronz
Rotor: Tecnopolimer
Arbore motor: Ceramica
Dop dezaerator: Alama
Inel de etansare: Etilen propilen
Carcasa motorului: Aluminiu turnat la cald
Camasa stator: Otel inox

Date motor

Marca : DAB
Max. Power input P1 : 0.055 kW
Viteza nominala: 2470 1/min
Tensiune nominala : 1~ 230 V 50 Hz
Curent nominal : 0.24 A
Grad de protectie: IP 44

Curve tolerance according to ISO 9906

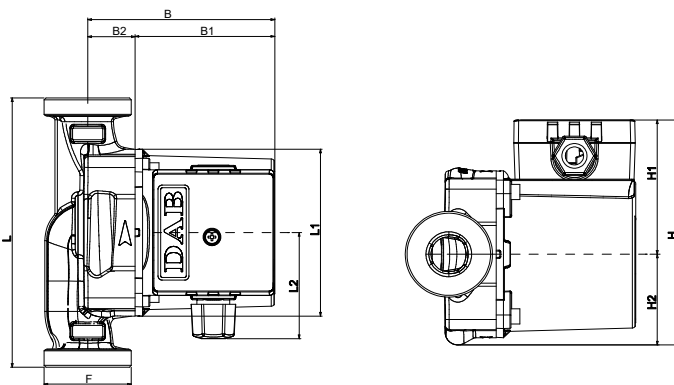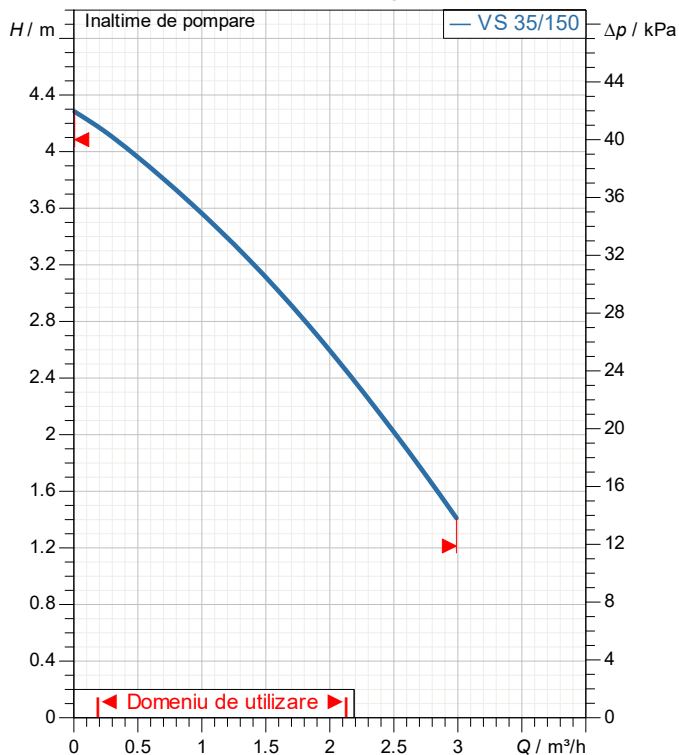

Dimensiuni de gabarit mm

B	104	H	124	L1	98		
B1	78	H1	75	L2	60		
B2	26	H2	49				
F	1 1/2" (	L	150				

Masa 2.6 kg

Racorduri pompa:


Partea cu aspiratia: 1" 1/2 G / 1000 kPa
Partea cu refularea: 1" 1/2 G / 1000 kPa

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

VS 35/150

Curve tolerance according to ISO 9906

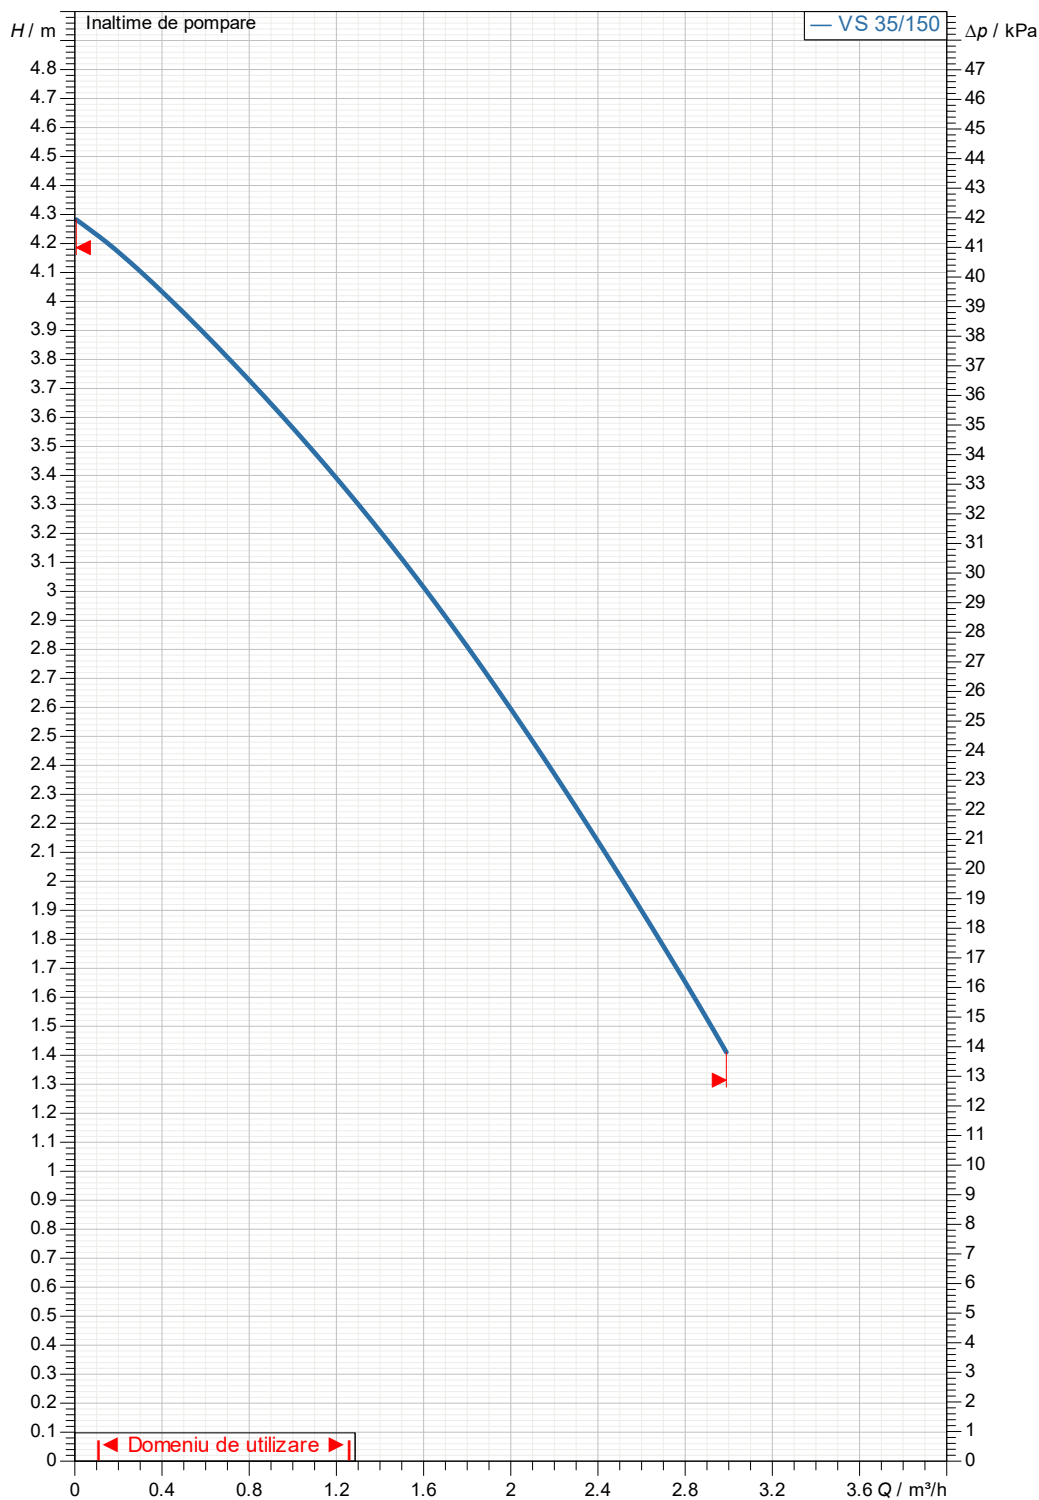

Partea cu aspiratia:
1" 1/2 G
1000 kPa

Partea cu refularea:
1" 1/2 G
1000 kPa

Debit :

Înăltime de pompare :

Viteza nominala:
2470 1/min

Oferta

ID oferta

Creat de



Creat

05/15/2026

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

VS 35/150

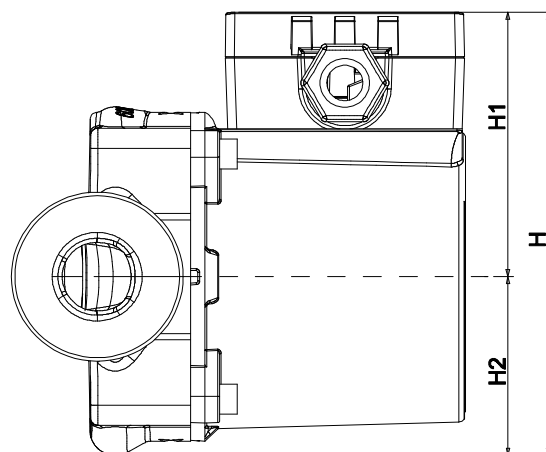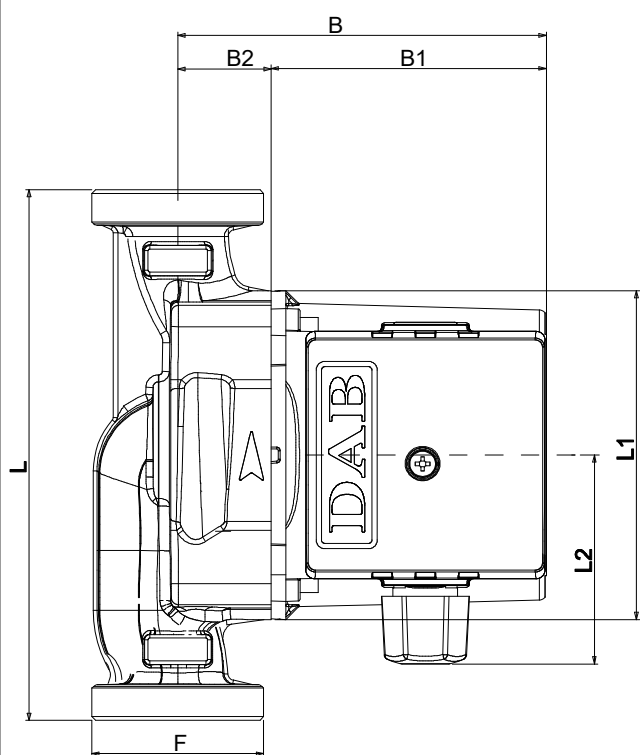

Dimensiuni in mm

Racorduri pompa:

1	B	104					
2	B1	78					
3	B2	26					
4	F	1 1/2" G					
5	H	124					
6	H1	75					
7	H2	49					
8	L	150					
9	L1	98					
10	L2	60					
11							

Aspiratie
1" 1/2 G
1000 kPa

Refulare
1" 1/2 G
1000 kPa

Oferta

ID oferta

Creat de

Creat

05/15/2026