


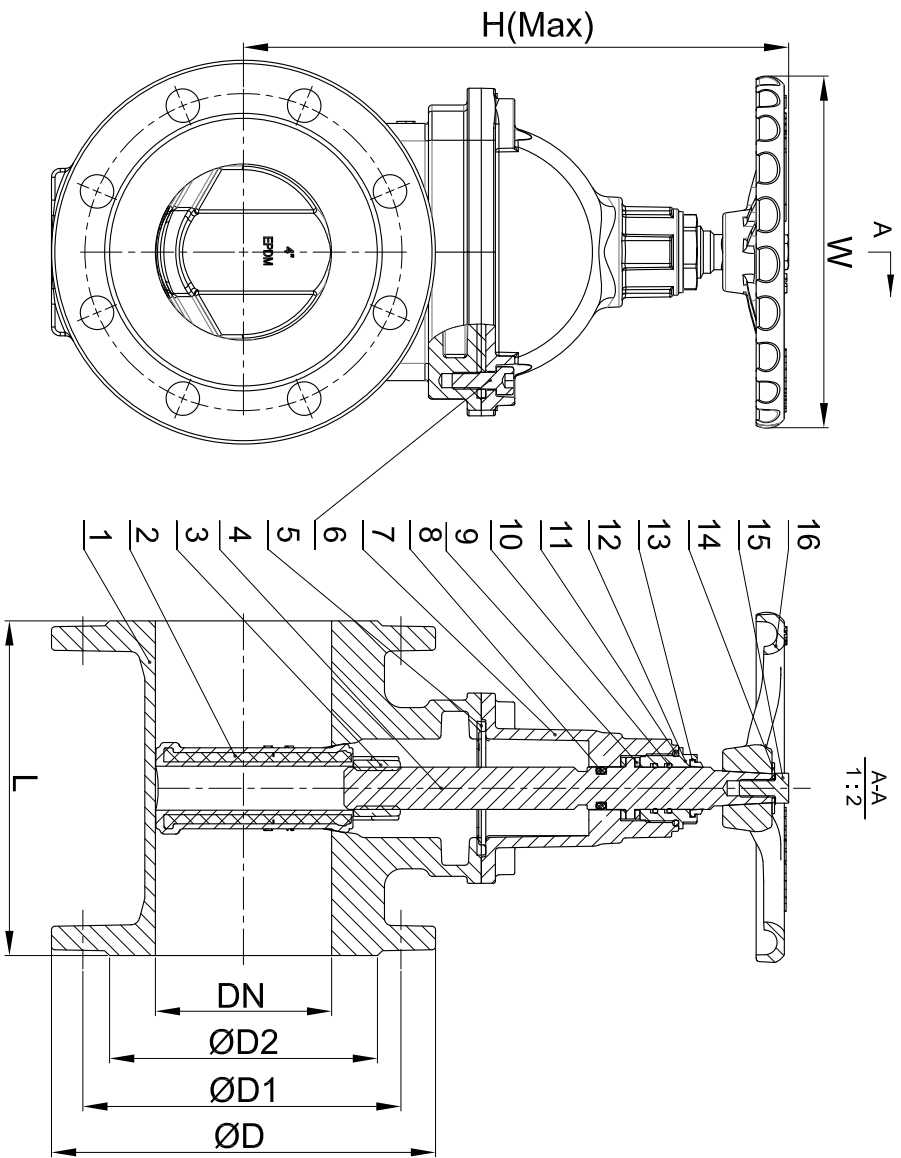

A-A
1:2

Specification

1. Design : DIN 3352
 2. Face to Face : EN558-1 14
 3. Flange drilling : EN1092-2 PN16.
 4. Working pressure: PN16
 5. Temperature: 0~50°C
 6. Test : EN12266-1.
- Coating: Blue FBE Coated.

DN	L	ØD	EN1092-2 PN16			H (Max)	W
			ØD1	ØD2	n-Ød		
40	140	150	110	84	4-19	253	160
50	150	165	125	99	4-19	248	180
65	170	185	145	118	4-19	255	180
80	180	200	160	132	8-19	280	180
100	190	220	180	156	8-19	320	200
125	200	250	210	184	8-19	370	200
150	210	285	240	211	8-23	410	280
200	230	340	295	266	12-23	515	320
250	250	400	355	319	12-28	605	320
300	270	455	410	370	12-28	690	360

16	Handwheel	Ductile Iron		
15	Bolt	Galvanized Steel		
14	Washer	Galvanized Steel		
13	Dust Guard	EPDM		
12	Bushing Nut	Brass		
11	O ring	EPDM		
10	O ring	EPDM		
9	Stem Washer	Nylon		
8	O ring	EPDM		
7	Bonnet	Ductile Iron		
6	Bolt	Galvanized Steel		
5	Bonnet Gasket	EPDM		
4	Stem	SS420		
3	Stem Nut	Brass		
2	Wedge	Ductile Iron + EPDM		
1	Body	Ductile Iron		
NO	Part Name	Material	Qty	Remark
DRN	WING	WEIGHT	MATERIAL	
CHK	SCALE			
APP	DATE	07/19/2024		
Hiwa			Gate Valve	
REV			CZ0001	
20240719a				