


# Pateo®

- Extensive, timeless design with soft transitions
- High heat output for highest heat demand
- Also ideally suited for low system temperatures
- Highest energy efficiency due to unique x2 technology
- 9 different dimensions and flexible connection options
- Infinitely height-adjustable towel rails as an option
- Connection to Kermi x-net underfloor heating possible with x-link plus connection fitting



Pateo  
Compact radiator  
page 238



## Product benefits

- Compact radiator for hot water operation
- Many connection options (at the centre, on the side at the bottom and top)
- Connection to Kermi x-net underfloor heating possible with x-link plus connection fitting
- Fixing not visible from the front
- Very high heat output
- x2 inside for max. energy efficiency
- Anti-corrosion coating available. For technical description, see page 263



## Scope of delivery

- Fixing set included satisfies requirement classes I and II of VDI guideline 6036. Requirement class III possible on request. Wall-building material needs to be tested on site for sufficient loading capacity. All visible fixing parts in radiator colour

## Accessories



## x-link plus connection fitting



For prices and description of x-link plus, see page 266.



Extensive quality features far in excess of the standard.

## Pricing information – Hot water operation

Painted radiator								EUR excluding VAT I/2018	
Height mm	Length mm	Depth mm	Radiator exponent n	Heat output in watts			Product code	Price 1	Price 2
				75/65-20 °C	70/55-20 °C 55/45-20 °C	70/55-24 °C 55/45-24 °C			
1525	500	66	1.3346	1056	842 530	736 436	PSR21150050 . XXK	Radiator in standard colour white (RAL 9016) <b>741.00</b>	Radiator according to Kermi colour concept <b>926.00</b>
1525	600	66	1.3335	1291	1030 648	900 533	PSR21150060 . XXK	<b>814.00</b>	<b>1018.00</b>
1525	700	66	1.3325	1530	1220 768	1066 632	PSR21150070 . XXK	<b>886.00</b>	<b>1108.00</b>
1725	500	66	1.3339	1149	916 577	801 474	PSR21170050 . XXK	<b>797.00</b>	<b>996.00</b>
1725	600	66	1.3349	1406	1121 705	979 580	PSR21170060 . XXK	<b>870.00</b>	<b>1088.00</b>
1725	700	66	1.3359	1666	1328 835	1160 687	PSR21170070 . XXK	<b>942.00</b>	<b>1178.00</b>
1925	500	66	1.3860	1247	986 609	857 497	PSR21190050 . XXK	<b>853.00</b>	<b>1066.00</b>
1925	600	66	1.3623	1525	1210 754	1054 618	PSR21190060 . XXK	<b>925.00</b>	<b>1156.00</b>
1925	700	66	1.3386	1808	1441 905	1258 744	PSR21190070 . XXK	<b>998.00</b>	<b>1248.00</b>

- Anti-corrosion coating (RAL 9016): + 40 % on price 1
- Anti-corrosion coating (colour): on request

When ordering, please state: colour.  
See fold-out page.

### Ordering example 1:

Pateo 1725 x 600 mm in white (RAL 9016)

**Product code: PSR21170060 2 XXK**


### Ordering example 2:

Pateo 1725 x 600 mm in circonsilver Metallic

**Product code: PSR21170060 Radiator colour circonsilver Metallic**

Technical information – Hot water operation

Pateo dimensions

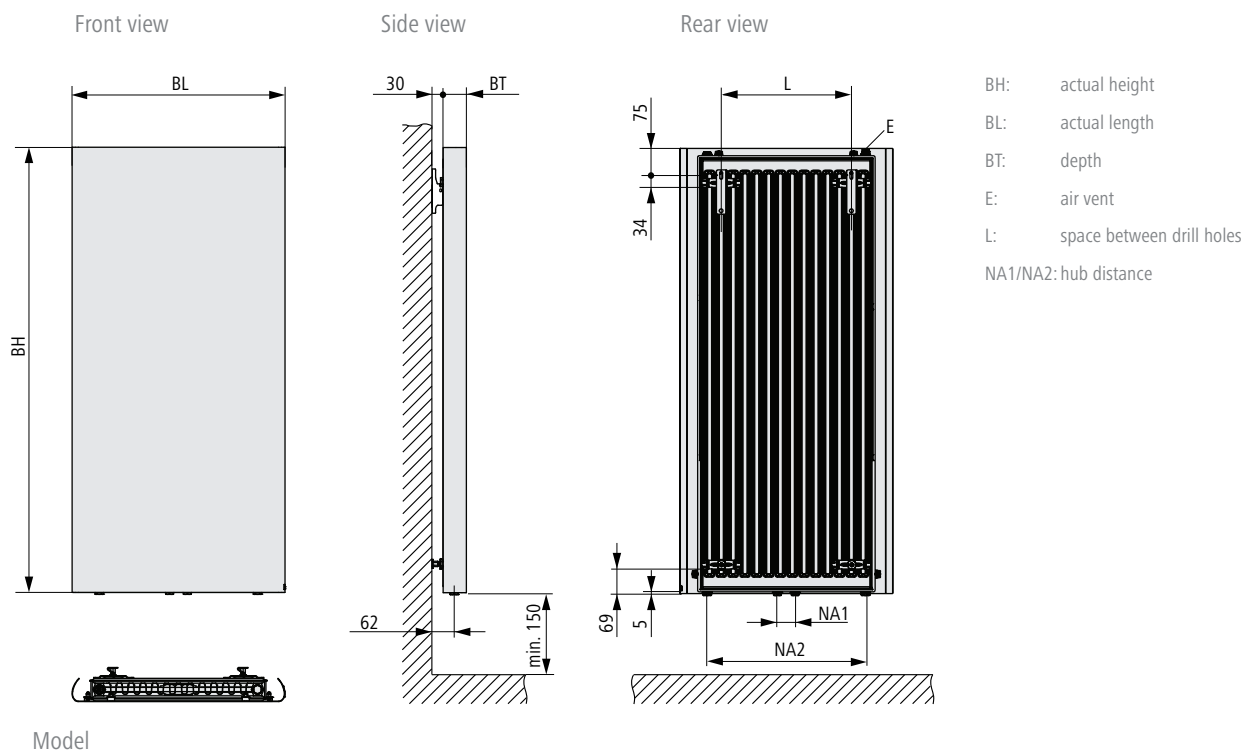

Distance from bottom edge of radiator to floor min. 150 mm.  
The position of the radiator should be adapted to the individual room setting according to what looks best.

BH mm	BL mm	BT mm	NA1 mm	NA2 mm	L mm	Weight kg	Water content l
1525	500	66	50	346	267	37.70	5.80
1525	600	66	50	446	367	45.90	7.30
1525	700	66	50	546	467	54.10	8.80
1725	500	66	50	346	267	41.90	6.50
1725	600	66	50	446	367	51.20	8.20
1725	700	66	50	546	467	60.50	9.90
1925	500	66	50	346	267	47.80	7.30
1925	600	66	50	446	367	58.50	9.10
1925	700	66	50	546	467	69.30	11.00



For characteristic equation,  
see page 282.

- Connections: 2 x G 1/2" internal thread at bottom centre, flow on the left.  
2 x G 1/2" internal thread at bottom on either side, flow on the left.  
2 x G 1/2" internal thread at top on either side, flow on the left.  
Suitable for one-pipe system with bottom centre connection.
- Air vent: G 1/2" upwards, on the left
- Operating pressure: max. 10 bar
- Test pressure: 13 bar
- Operating conditions: Hot water up to 110 °C