

## SBR EXTREME 100-20

SBR EXTREME 100-8 vulcanised rubber  
vibration-resistant floor base


11105060V - SCD500241 - SCD500242

11105066V - 11105068V



### TECHNICAL SPECIFICATIONS:

- Floor bases in SBR vulcanised rubber
- "U" shaped aluminium profile is sunk for better sealing
- Built-in spirit level
- Fastening with threaded plate, washer and M8 bolt supplied
- Slots ready for drilling holes for fastening to the floor
- Non-slip, water-draining resting base in armed body
- Ideal for the fastening of outdoor condensing units, VRV-VRF, base-mounted boilers, electrical or tube channels

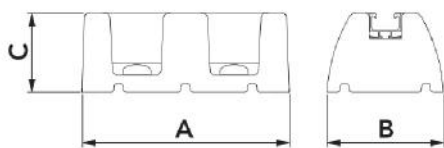

### DIMENSIONS

| CODE      | A [mm] | B [mm] | C [mm] |
|-----------|--------|--------|--------|
| 11105060V | 250    | 140    | 95     |
| SCD500241 | 450    | 140    | 95     |
| SCD500242 | 600    | 140    | 95     |
| 11105066V | 1000   | 140    | 95     |
| 11105068V | 1200   | 140    | 95     |

## TECHNICAL DATA

| CODE      | LOAD CAPACITY [kg] |
|-----------|--------------------|
| 11105060V | 200                |
| SCD500241 | 300                |
| SCD500242 | 500                |
| 11105066V | 650                |
| 11105068V | 750                |

## ITEMS

| CODE      | DESCRIPTION                                                                                   |
|-----------|-----------------------------------------------------------------------------------------------|
| 11105060V | SBR "EXTREME-20" 250 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8  |
| SCD500241 | SBR "EXTREME-20" 450 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8  |
| SCD500242 | SBR "EXTREME-20" 600 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8  |
| 11105066V | SBR "EXTREME-20" 1000 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8 |
| 11105068V | SBR "EXTREME-20" 1200 - FOOT MOUNT WITH ALU PROFILE, THREADED PLATE TYPE B, WASHER AND NUT M8 |