

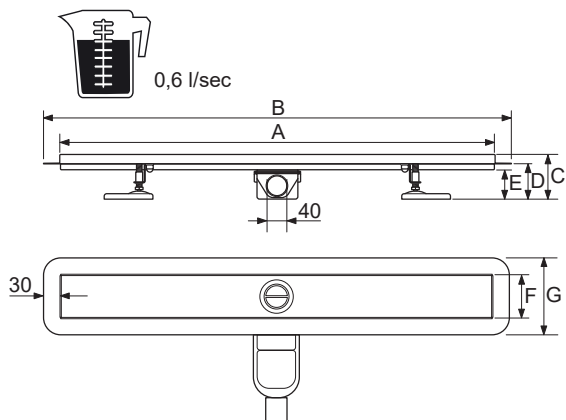
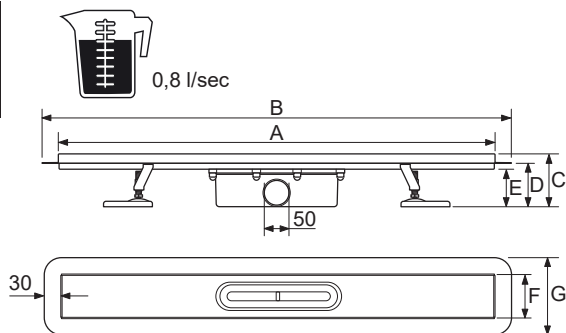



Uponor Aqua Ambient linear shower inlets

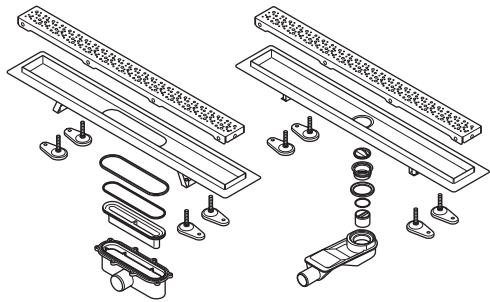


Type	Ø	A	B	C	D	E	F	G
600	50	600	660	98-118	82-102	69	83	143
700	50	700	760	98-118	82-102	69	83	143
800	50	800	860	98-118	82-102	69	83	143
900	50	900	960	98-118	82-102	69	83	143
1000	50	1000	1060	98-118	82-102	69	83	143









Type	Ø	A	B	C	D	E	F	G
600	40	600	660	83-105	67-90	54	83	143
700	40	700	760	83-105	67-90	54	83	143
800	40	800	860	83-105	67-90	54	83	143
900	40	900	960	83-105	67-90	54	83	143
1000	40	1000	1060	83-105	67-90	54	83	143








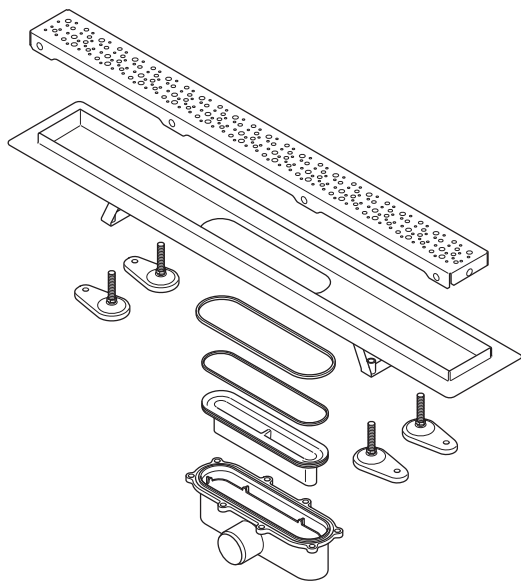








Standard

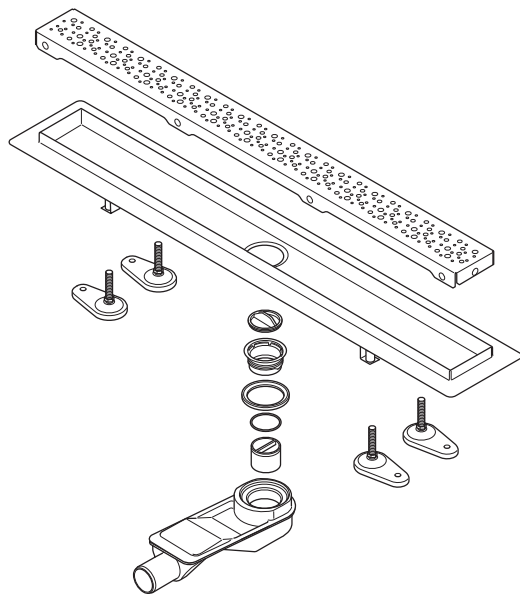

Low

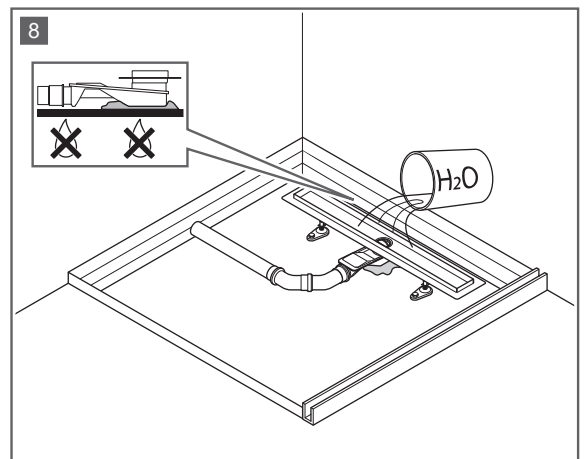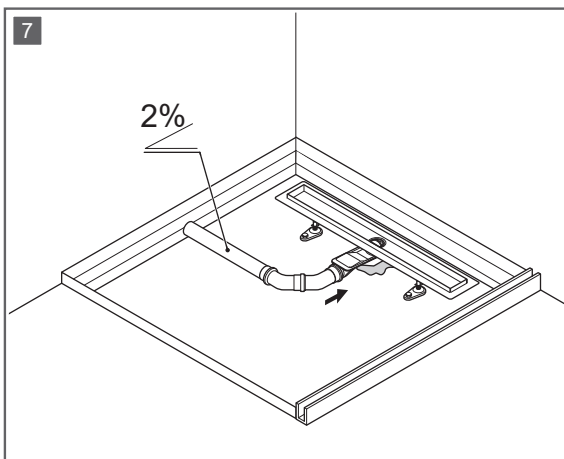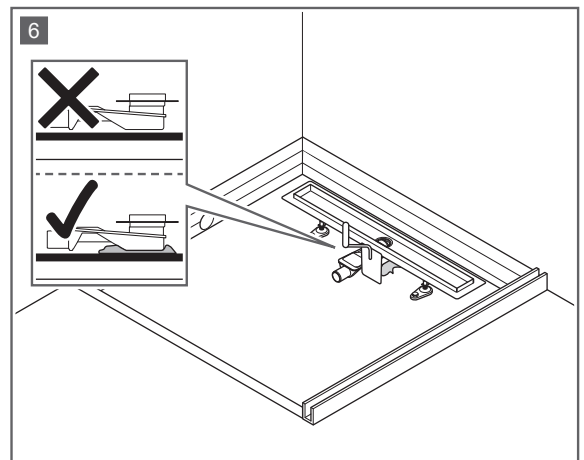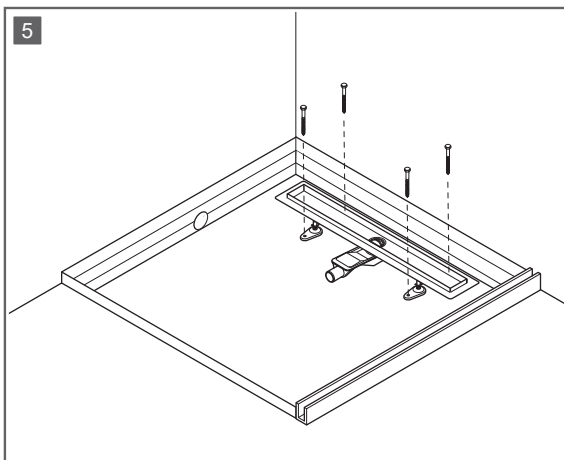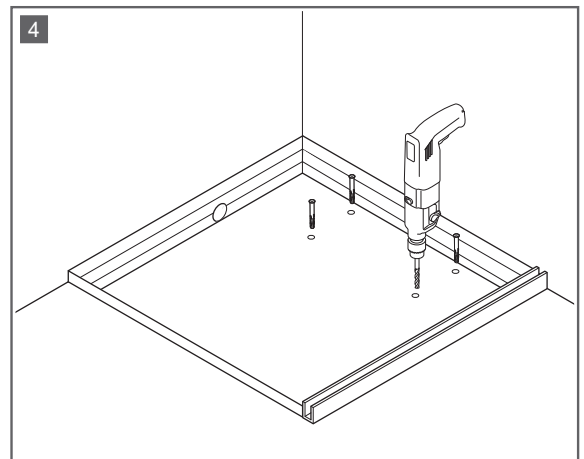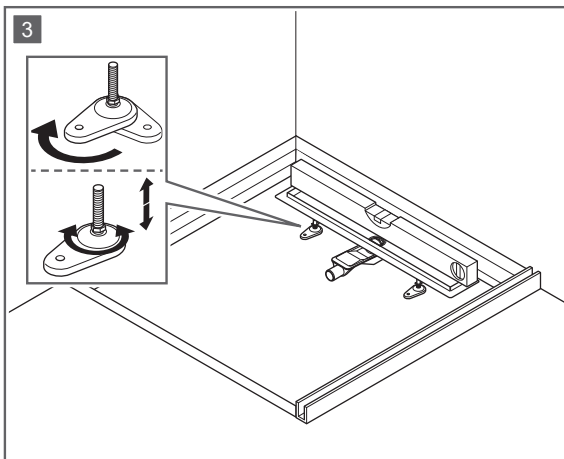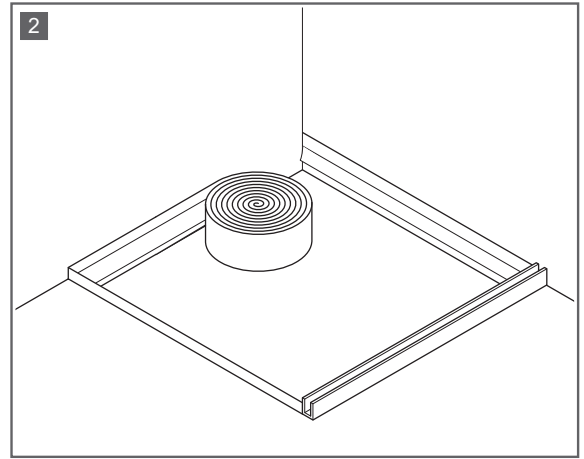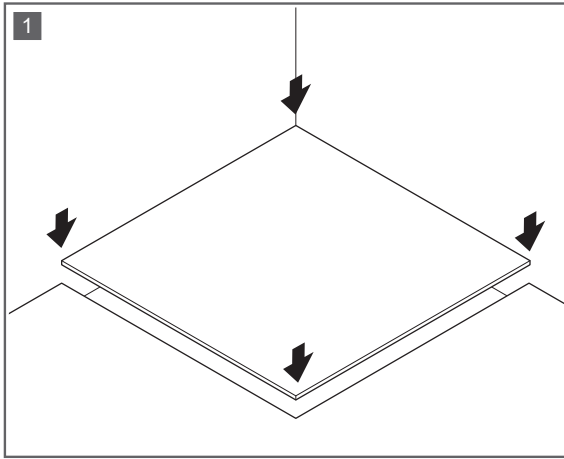

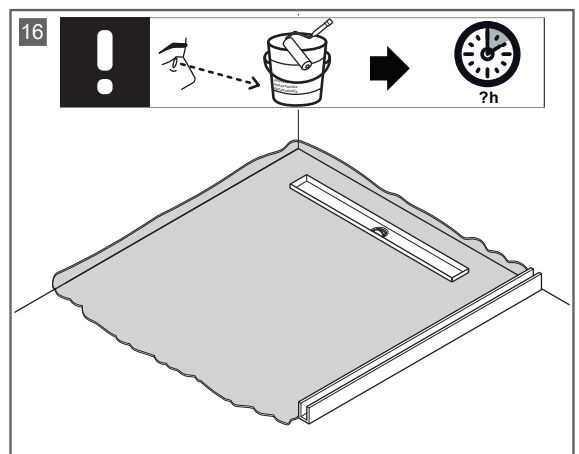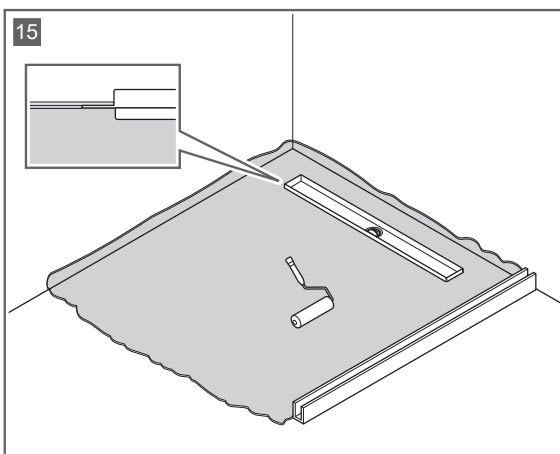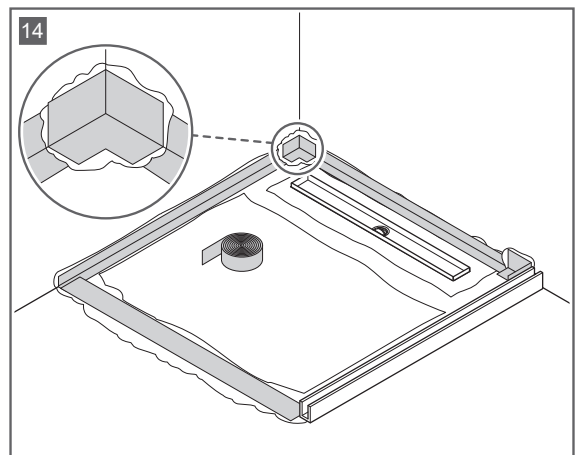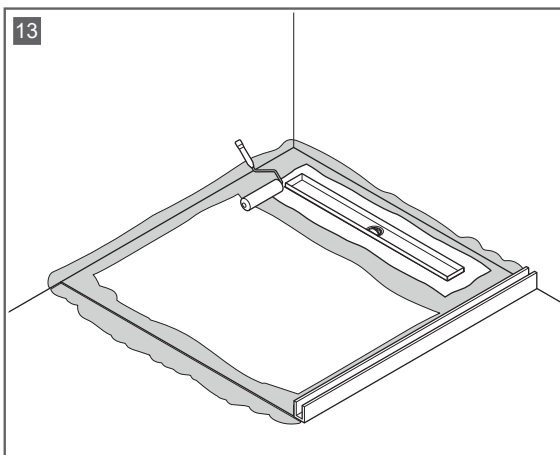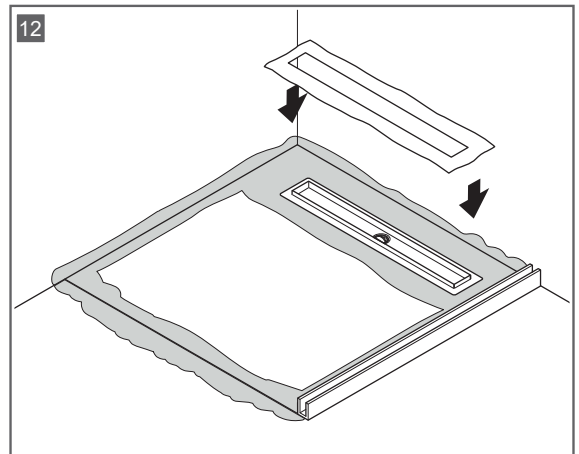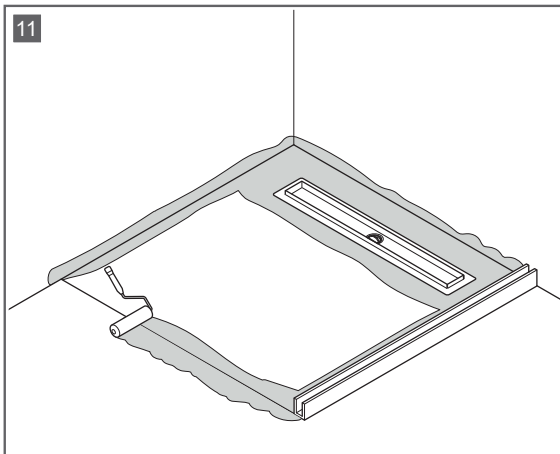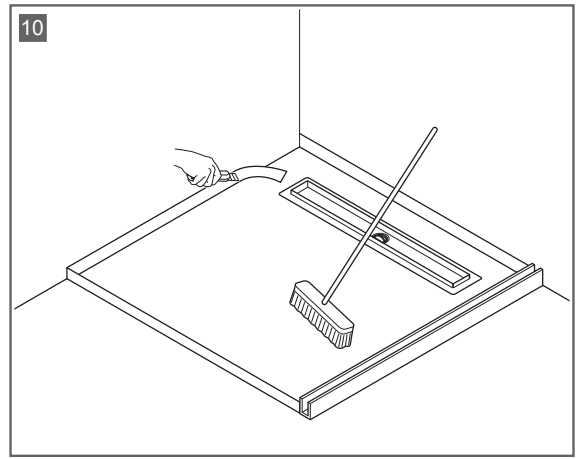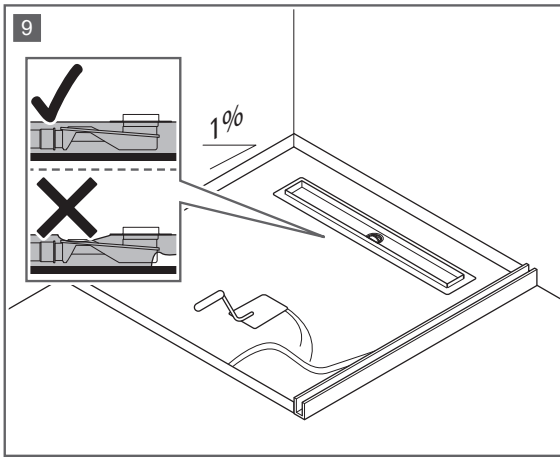

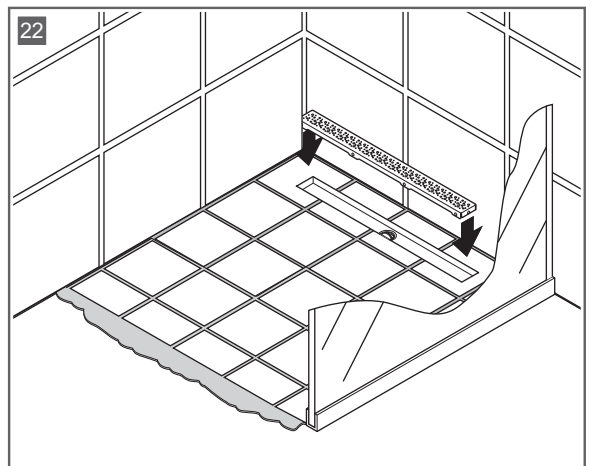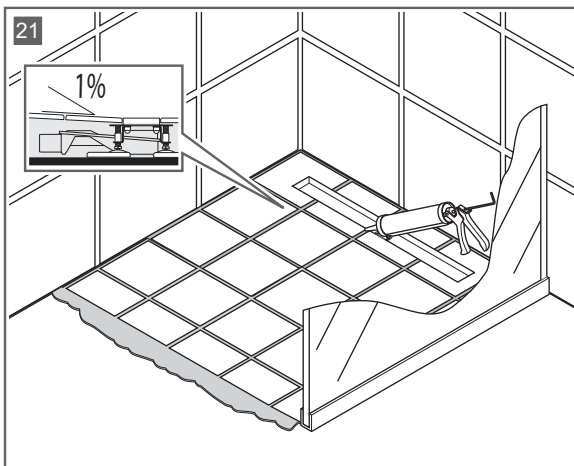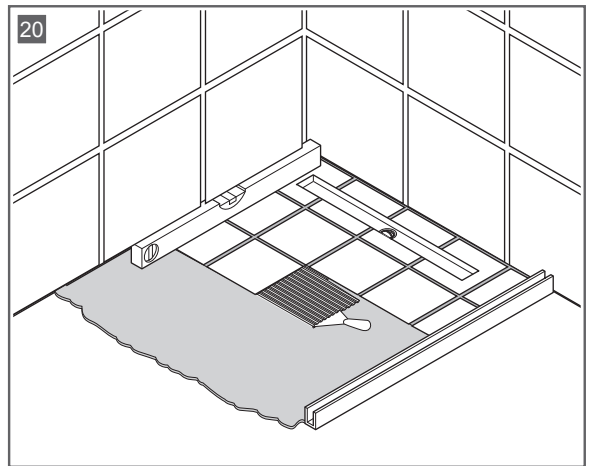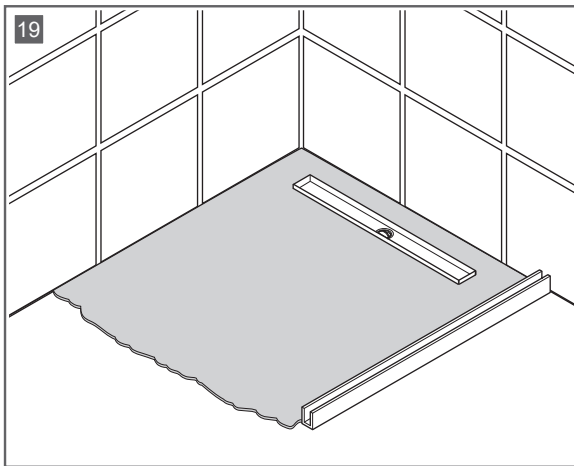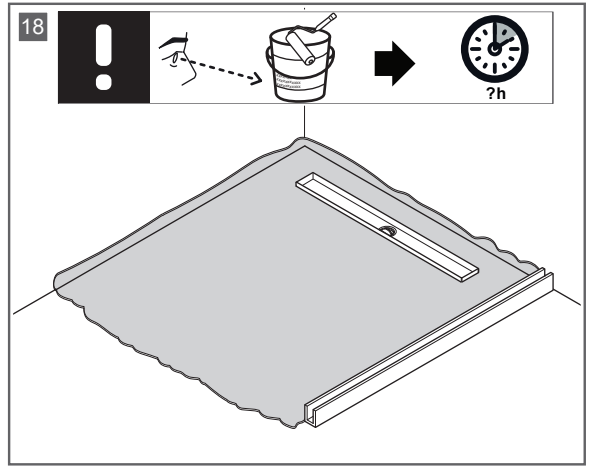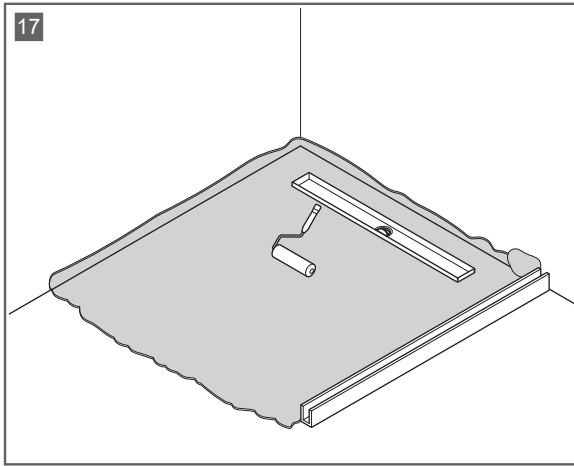

Uponor GmbH

Industriestraße 56,
D-97437 Hassfurt, Germany

1137638 v2_01_2023_INT
Production: Uponor / SKA

Uponor reserves the right to make changes, without prior notification, to the specification of incorporated components in line with its policy of continuous improvement and development.



www.uponor.com