



ART 725 MK4

TWO WAY PASSIVE SPEAKER



Description

ART 725 MK4 is a passive two-way system with an accurate acoustic design for club installations and live music. Thanks to the high quality compression driver with a 3" voice coil and the 15" woofer, the ART 725 MK4 delivers clear high frequencies, punchy bass and full and precise mid frequencies. The new aluminium rear panel is equipped with Speakon in/out connectors.

Features

- › 1.4" compression driver with 3" voice coil
- › 15" woofer, high power, 3.5" voice coil
- › 133 dB max spl
- › Input Power Rating: 650 W AES

Part Number

13000548 ART 725 MK4

Black


EAN 8024530015251



ART 725 MK4

TWO WAY PASSIVE SPEAKER

Line Art 2D

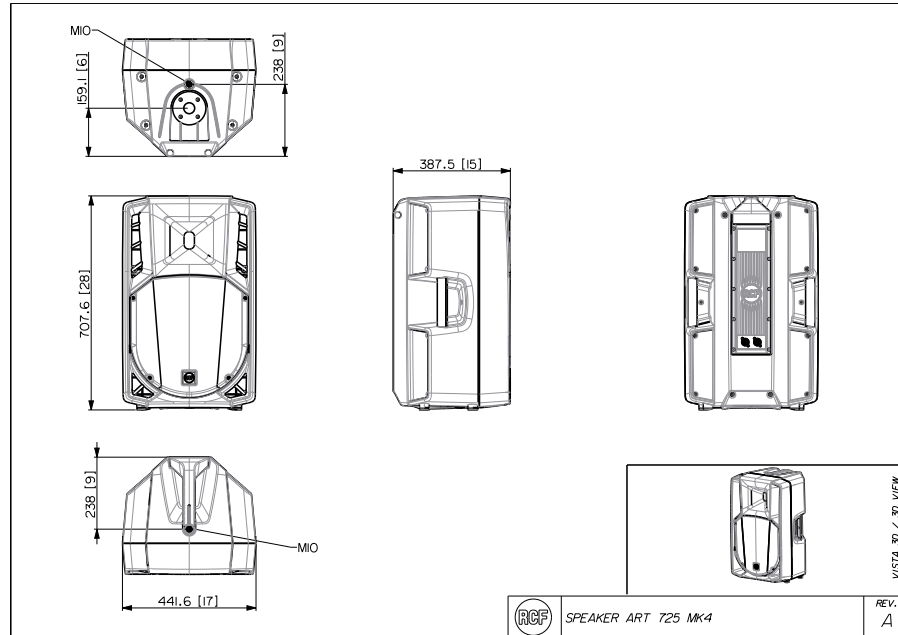

RCF SPEAKER ART 725 MK4 REV. A

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB)	55 Hz ÷ 20000 Hz
	Max SPL @ 1m	133 dB
	Horizontal coverage angle	90°
	Vertical coverage angle	60°
	System Sensitivity	99 dB
Power section	Amplification	Full Range
	Nominal Impedance	8 ohm
	Power Handling	700 W
	Peak Power Handling	2800 W PEAK
	Crossover Frequencies	1400 Hz
Transducers	Compression Driver	1 x 1.4" neo, 3.0" v.c
	Woofer	1 x 15" neo, 3.5" v.c
Input/Output section	Input connectors	Speakon® NL4
	Output connectors	Speakon® NL4
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	PP Composite
	Hardware	2 x M10
	Handles	1 Top, 2 Side
	Pole mount/Cap	Yes
	Grille	Steel
	Color	Black
Size	Height	708 mm / 27.87 inches
	Width	437 mm / 17.2 inches
	Depth	389 mm / 15.31 inches
	Weight	20.5 kg / 45.19 lbs
	ACCESSORIES	
Protections	CVR ART 725	13360115 8024530010676
Rigging / Mounting	AC PMX	13360232 8024530010058



ART 725 MK4

TWO WAY PASSIVE SPEAKER

Rigging / Mounting

AC PRO-FS	13360109	8024530006471
AC PRO-PM	13360110	8024530006488
H-BR 2X ART 715	13360105	8024530012939
PM-KIT M20	13360067	8024530014599