


VOLANO UP - MILD STEEL

HANGING SEPARATOR/BUFFER TANK FOR HEAT PUMP IN MILD STEEL

PRESSURE	TEMPERATURE
Pmax	Tmin/Tmax
6 bar	-10 / +95 °C


For installation examples see page 46



4 CONNECTIONS

6 CONNECTIONS

30 LOW

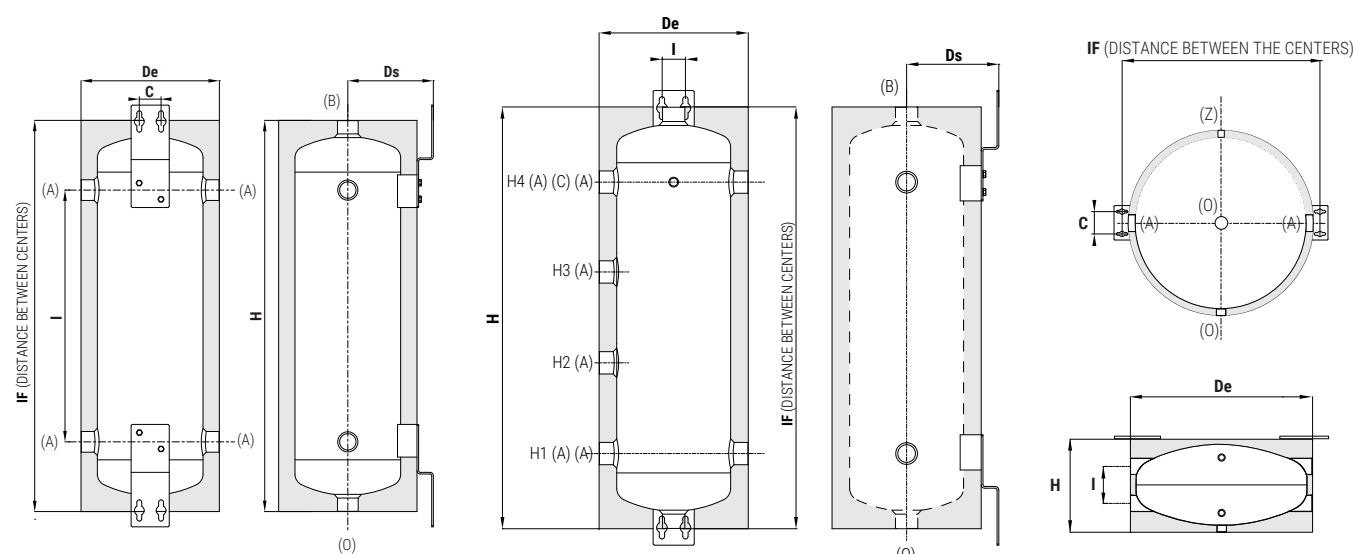

- A** System connection
- B** Safety valve
- C** Instrumentation 1/2"
- D** Drain
- Z** Air purge 3/8"

VOLANO UP (4 CONNECTIONS) - GBF GBP

Model	Volume [liters]	Weight [Kg]	De	Ds	H	I	IF	C	B-O	A
Connections F										
8	8,3	6,5	255	149	382	126	378	40	1"	1"
12	12,4	7,5	255	149	526	270	522	40	1"	1"
25	25	11	290	166	790	450	776	40	1"	1 1/4
30 Low	30	17,5	550	-	265	96	620	70	1/2"	1 1/4
50	51	16	343	192	1000	600	996	40	1"	1 1/4
50 Low	50	16	450	252	495	150	450	70	1 1/4	1 1/4
80	81	18	450	252	745	395	695	70	1 1/4	1 1/4
100	95	24	450	252	870	525	825	70	1 1/4	1 1/4

VOLANO UP (4 CONNECTIONS) - GBL (A CLASS)

Model	Volume [liters]	Weight [Kg]	De	Ds	H	I	IF	C	B-O	A
Connections F										
12	12,4	13,5	344	193	566	270	562	40	1"	1"
25	25	19,0	340	194	830	450	816	40	1"	1 1/4
50	51	29,0	423	231	1040	600	1038	40	1"	1 1/4
100	95	40,0	550	302	930	525	885	70	1 1/4	1 1/4

VOLANO UP (6 CONNECTIONS) - GBF GBP

Model	Volume [liters]	Weight [Kg]	De	H	H1	H2	H3	H4	IF	I	DS	B-O	A
Connections F													
25	25	14	290	790	170	320	470	620	776	40	166	1"	1 1/4
50	51	19	343	1000	200	400	600	800	996	40	192	1"	1 1/4
80	80	22	450	745	175	310	440	570	695	70	252	1 1/4	1 1/4
100	95	26	450	875	175	350	525	700	825	70	252	1 1/4	1 1/4