

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

Cod articolo :	Customer pos. no.:
60151018	
Articolo:	
EOPLUS D 100/340.65 M	

Date pompa

Presiune nominala:	1600 kPa
Temperatura min. fluid	-10 °C
Temperatura max. fluid	110 °C
EEI :	< 0.20

Presiune minima la nivelul apei:

Temperatura : °C 90 - 100

Presiune minima la nivelul apei: m 20 - 25

Date de functionare cerute

Debit :	
Înălțime de pompare :	
Fluid pompat (%) :	
Temperatura fluid:	20 °C
Densitate	998.3 kg/m³
Vâcositate cinematică:	1.005 mm²/s
Presiune de vapori:	2.34 kPa

Date disponibile:

Debit :



Înălțime de pompare :

Materiale

Corp pompa	Cast iron 250 UNI ISO 185 - CTF
Rotor	Tecnopolimer
Arbore motor	Otel inox
Inel de etansare	EPDM
Carcasa motorului	Aluminiu turnat la cald
Flansa de inchidere	Otel inox
Suport inel de echilibrare	Otel inox

Curve tolerance according to ISO 9906

Number of working motors : 1

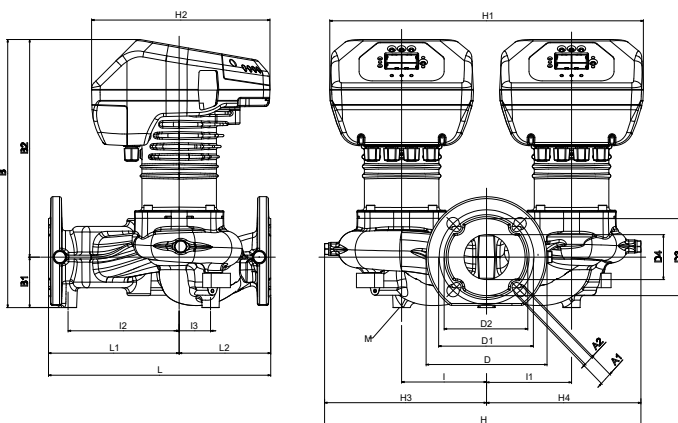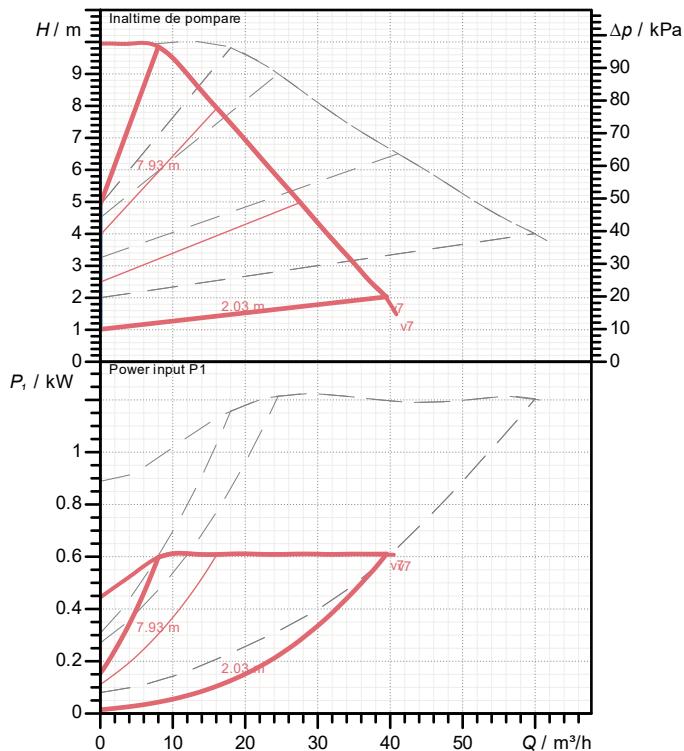

Date motor

Marca :	DAB		
Max Power input P1 :	1 X	0.59 kW	
Tensiune nominala :	1~	220-240 V	50 Hz
Curent nominal :	1 X	2.8 A	
Grad de protecție:	IP 44		

Dimensiuni de gabarit mm

A1	19	D1	145	H2	273	I3	48
A2	14	D2	130	H3	248	L	340
B	411	D3	118	H4	236	L1	200
B1	77	D4	69	I	130	L2	140
B2	334	H	484	I1	130	M	M12
D	185	H1	480	I2	170		

Masa	44.8 kg
-------------	---------

Racorduri pompa:

Partea cu aspiratia: DN 65 / PN6, PN10, PN16

Partea cu refularea: DN 65 / PN6, PN10, PN16


Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS D 100/340.65 M
Number of working motors : 1

Curve tolerance according to ISO 9906

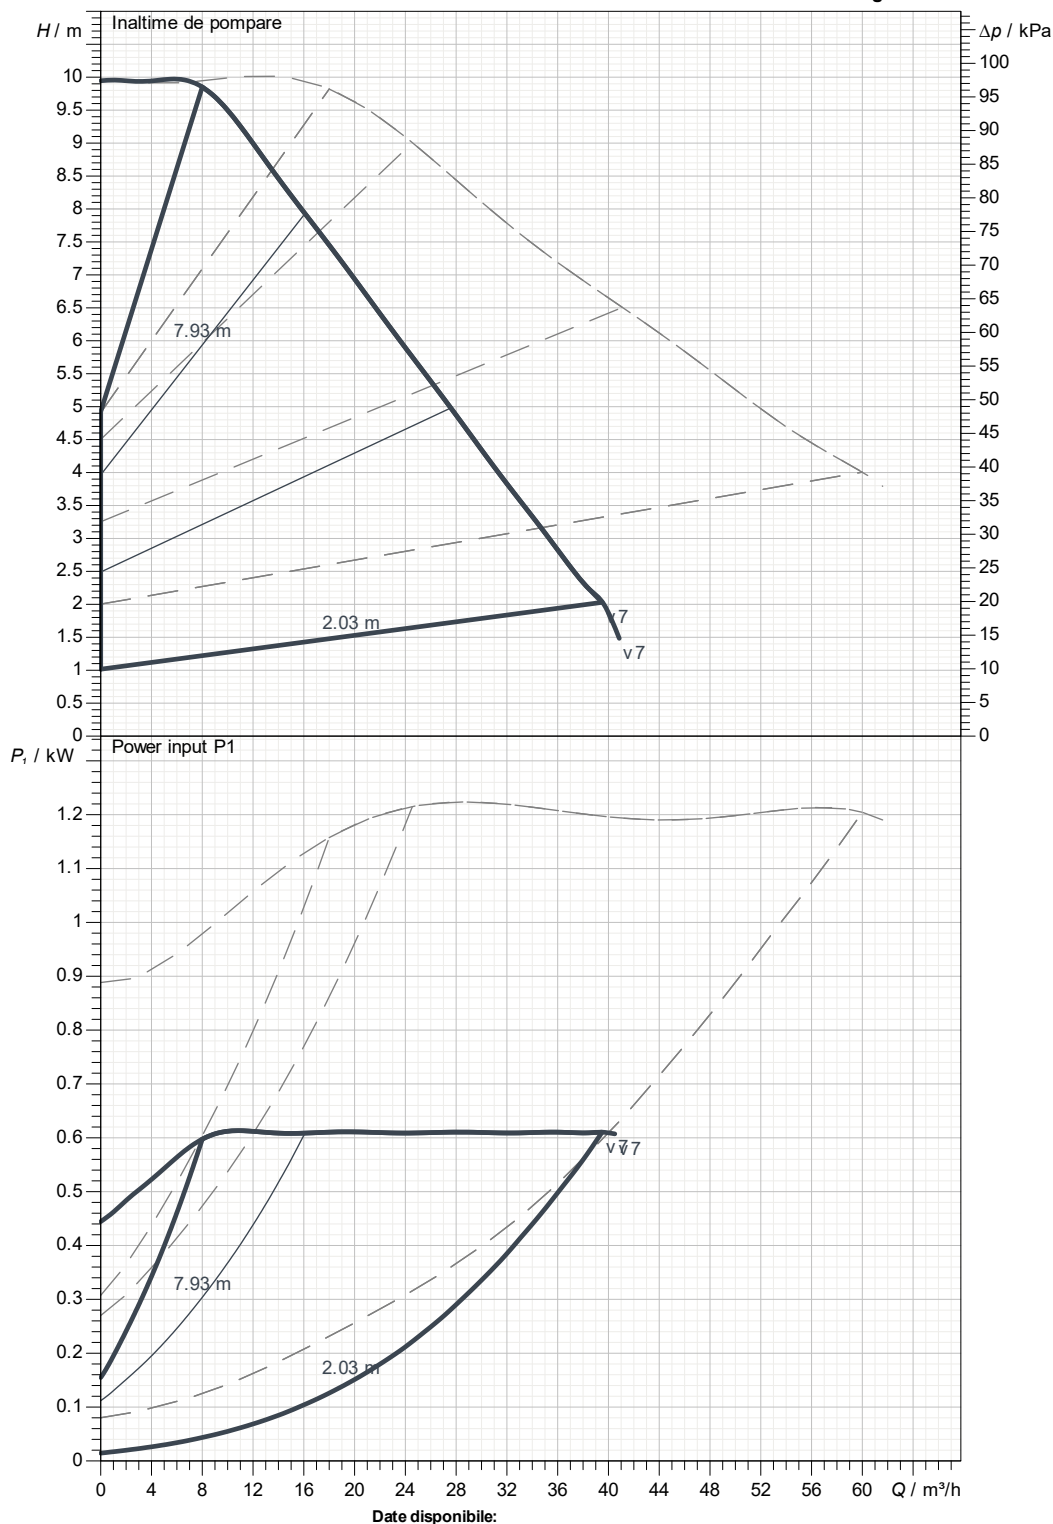

Partea cu aspiratia:

DN 65

PN6, PN10, PN16

Partea cu refularea:

DN 65

PN6, PN10, PN16

Debit :

Înăltime de pompare :

Viteza nominala:

2900 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

07/24/2024



DESEN DIMENSIONAL

07/24/2024

Pagina 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS D 100/340.65 M

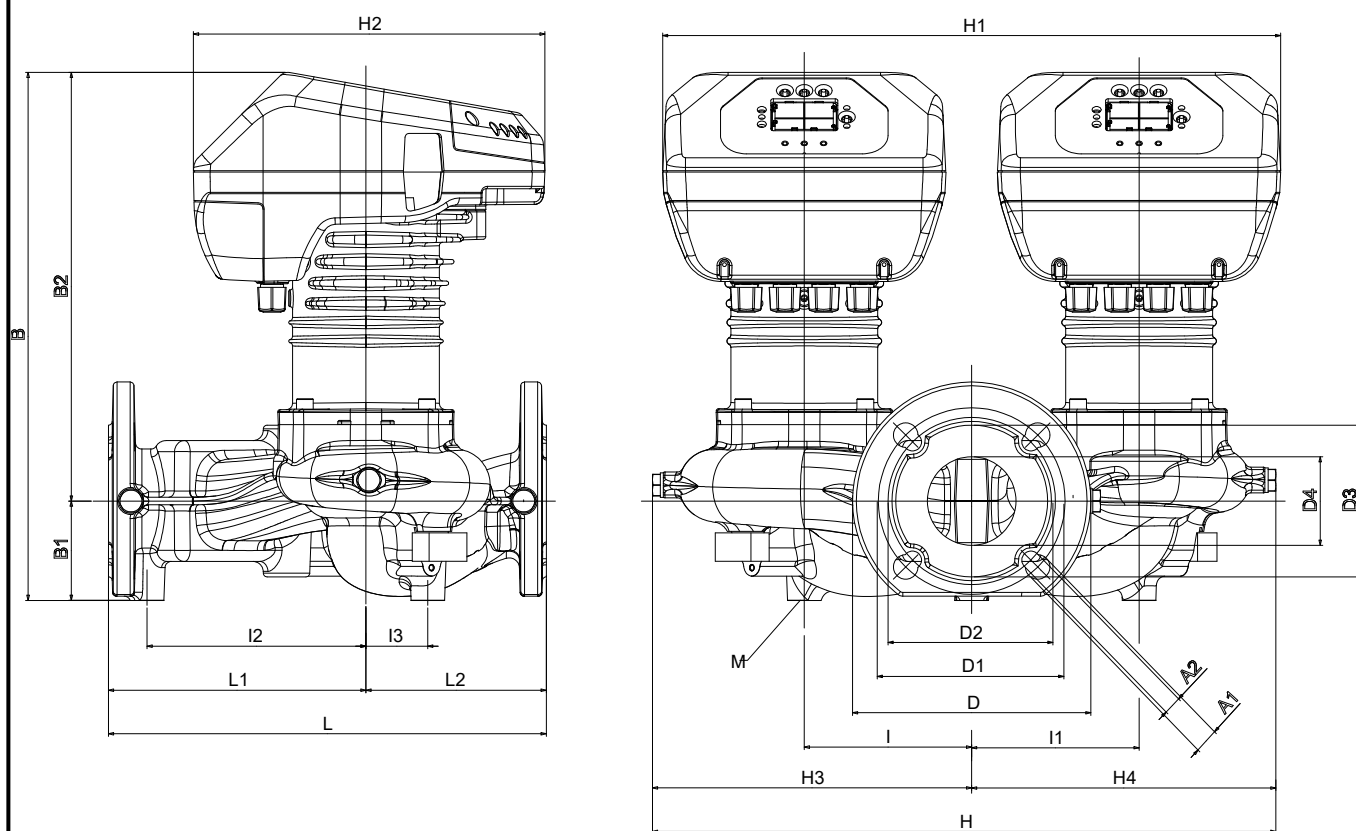

Dimensiuni in mm

Racorduri pompa:

1	A1	19	H1	480	M	M12	
2	A2	14	H2	273			Aspiratie
3	B	411	H3	248			DN 65
4	B1	77	H4	236			PN6, PN10, PN16
5	B2	334	I	130			
6	D	185	I1	130			
7	D1	145	I2	170			Refulare
8	D2	130	I3	48			DN 65
9	D3	118	L	340			PN6, PN10, PN16
10	D4	69	L1	200			
11	H	484	L2	140			

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

07/24/2024