

# BELLAVISTA R2 PLUS

AIR-DUCTING PELLET STOVE



To innovate is to make a complex operation simple. Comfort is improving the quality of life at home. Safety is taking care of the environment and those who use our products. Design is the study of forms and technological solutions able to anticipate the times. Research is bringing all this together in a single project. Designed starting from a new point of view yours.

Heatable area

**100** m<sup>2</sup>.






- 1 - Superior smoke exhaust
- 2 - Hygienic, glass top with food warmer function
- 3 - Patented heat exchanger with Thermocore® technology
- 4 - Firebox with 270° fire view
- 5 - Finishing with decorative stones
- 6 - PelletPower® patented burner



## DIMENSIONS

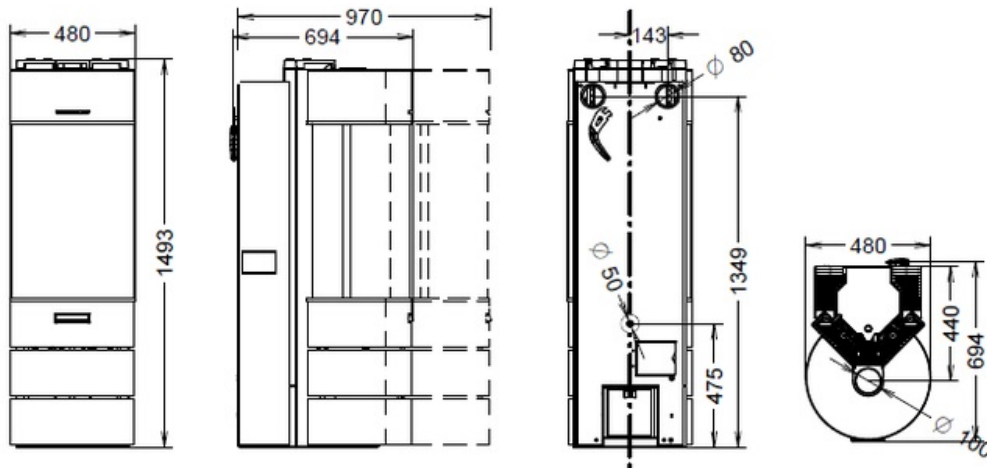

## TECHNICAL DATA

DIMENSIONS (HXWXD)	1493X481X671
WEIGHT (KG)	183,00
HEATABLE AREA (M <sup>2</sup> )	100
EFFICIENCY UP TO MAX (%)	90,8%
ENERGY CLASS	A+
POWER TO THE HEART (KW)	4,4 - 12,2
RATED POWER (KW)	3,9 - 11,1

POWER TO THE WATER (KW)	-
RADIATION (KW)	-
HOURLY PELLET CONSUMPTION (KG/H)	0,9 - 2,5
WOOD HOURLY CONSUMPTION (KG/H)V	-
PELLET HOPPER CAPACITY (KG)	25,00
WARM AIR DUCTING	SI
MAXIMUM SINGLE DUCTING OUTLET (M)	11,00
PATENTED BURNER PELLETPOWER®	SI
ROMM VENTILATION	SI
PRIMARY AIR FROM OUTSIDE	SI
CO EMISSIONS (MG/M³; 13% DI O2)	39
CO EMISSIONS (MG/M³; 10% DI O2)	-
DUST EMISSIONS (MG/M³; 13% DI O2)	14,1
DUST EMISSIONS (MG/M³; 10% DI O2)	-
SILENCE(DB)	36,00
REMOTE CONTROL	SI
RADIO CONTROL WITH ROOM TEMPERATURE THERMOSTAT	OPT
WEEKLY PROGRAMMER (3 DAILY LIGHTING)	SI
SMART INFO FUNCTION	SI
SYSTEM CIRCULATING PUMP	-
EXPANSION TANK	-
OVER PRESSURE VALVE	SI
FLUE GASEXHAUST DIAMETER (MM)	100
MIN. FLUE DRAUGHT PRESSURE (PA)	12
ELECTRIC CONSUMPTION (WATT)	70-270
HIGH TEMPERATURE SAFETY THERMOSTAT	SI

—————

THERMOROSSI S.p.A.

Via Grumolo, 4 | 36011 Arsiero (VI) | Italy | E-mail: info@thermorossi.it

Tel: 800.44.88.77 | Fax: 0445 741657 | P.IVA 00168470243 | Iscr. REA99797 Vicenza | Cap. Sociale di 156.000,00 I.v.