

## Destinatar

Firma  
Referinta  
Adresa  
Phone  
Fax  
E-mail

## Expeditor

### Cod articol :

60220915

### Customer pos. no.:

### Articol:

EVOPLUS B 120/340.65 M

### Date pompa

Presiune nominala: 1600 kPa  
Temperatura min. fluid -10 °C  
Temperatura max. fluid 110 °C  
EEI : ≤ 0,20

### Presiune minima la nivelul apei:

Temperatura : °C 90 100  
Presiune minima la nivelul apei: m 20 25

### Date de functionare cerute

Debit :  
Înălțime de pompare :  
Fluid pompat (%) :  
Temperatura fluid: 20 °C  
Densitate 998.3 kg/m³  
Vascozitate cinematica: 1.005 mm²/s  
Presiune de vapori: 2.34 kPa



### Date disponibile:

Debit :  
Înălțime de pompare :

### Materiale

Corp pompa Cast iron 250 UNI ISO 185 with Cataphoresis  
Rotor Tecnopolimer  
Arbore motor Otel inox  
Inel de etansare EPDM  
Carcasa motorului Die cast aluminium with Cataphoresis  
Flansa de inchidere Otel inox  
Suport inel de echilibrare Otel inox

### Curve tolerance according to ISO 9906

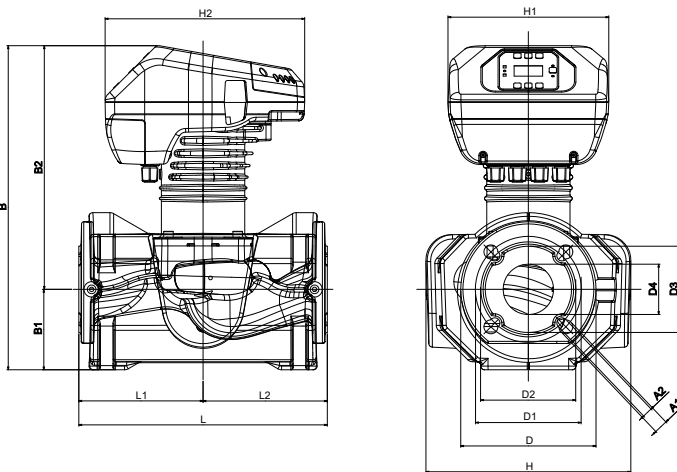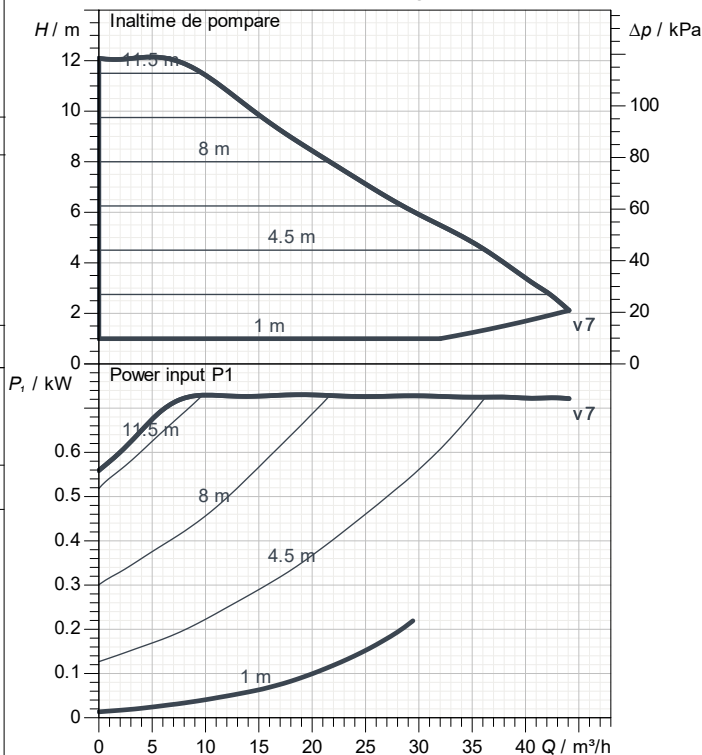

### Date motor

Marca : DAB  
Max. Power input P1 : 0.73 kW  
Tensiune nominala : 1~ 220-240 V 50 Hz  
Curent nominal : 3.45 A  
Grad de protecție: IP 44

### Dimensiuni de gabarit mm

|    |     |    |     |    |     |  |  |
|----|-----|----|-----|----|-----|--|--|
| A1 | 19  | D1 | 145 | H2 | 273 |  |  |
| A2 | 14  | D2 | 130 | L  | 340 |  |  |
| B  | 443 | D3 | 118 | L1 | 170 |  |  |
| B1 | 110 | D4 | 69  | L2 | 170 |  |  |
| B2 | 333 | H  | 280 |    |     |  |  |
| D  | 185 | H1 | 220 |    |     |  |  |

Masa 24.6 kg

### Racorduri pompa:

Partea cu aspiratia: DN 65 / PN6, PN10, PN16  
Partea cu refularea: DN 65 / PN6, PN10, PN16


Destinatar

Expeditor

Firma  
Referinta  
Adresa  
Phone  
Fax  
E-mail

## EVOPLUS B 120/340.65 M

Curve tolerance according to ISO 9906

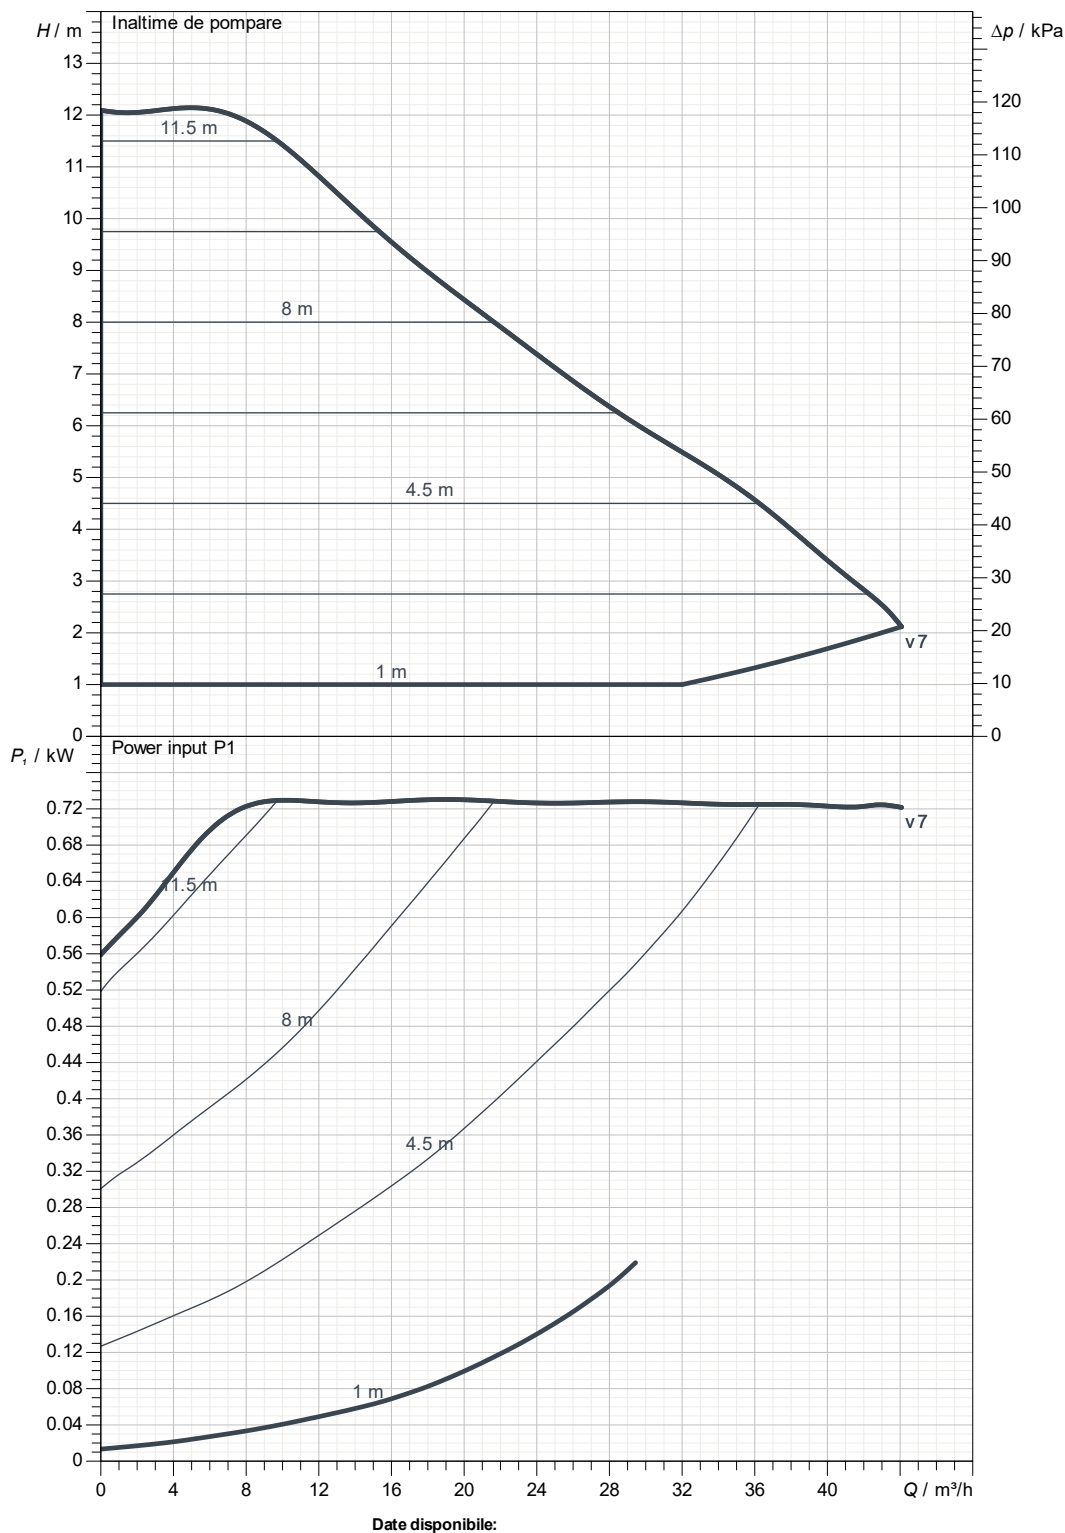

Date disponibile:

Partea cu aspiratia:

DN 65

PN6, PN10, PN16

Partea cu refularea:

DN 65

PN6, PN10, PN16

Debit :

Înăltime de pompare :

Viteza nominala:

4000 1/min

MAIN\_PROJECT\_TITLE

BUSINESS\_PROCESS\_ID

OWNER\_

ISSUE\_DATE

08/11/2025



## DESEN DIMENSIONAL

08/11/2025

Pagina 3 / 3


DAB PUMPS S.p.A.  
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy  
Tel. +39 049 5125000 - Fax +39 049 5125950  
www.dabpumps.com

Destinatar

Expeditor

Firma  
Referinta  
Adresa  
Phone  
Fax  
E-mail

### EVOPLUS B 120/340.65 M

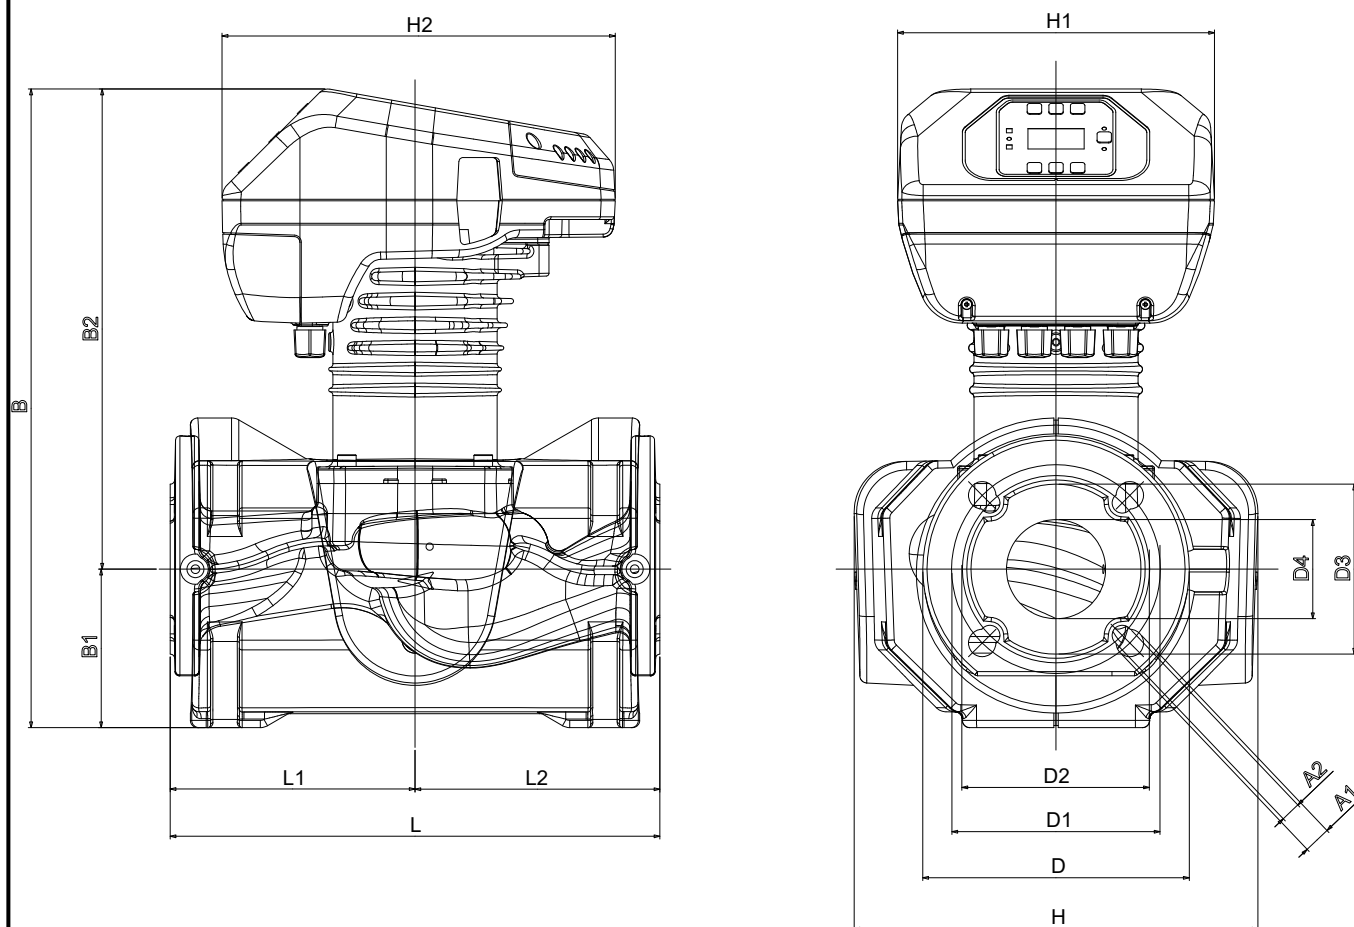

Dimensiuni in mm

Racorduri pompa:

|    |    |     |    |     |  |  |                 |
|----|----|-----|----|-----|--|--|-----------------|
| 1  | A1 | 19  | H1 | 220 |  |  |                 |
| 2  | A2 | 14  | H2 | 273 |  |  |                 |
| 3  | B  | 443 | L  | 340 |  |  | Aspiratie       |
| 4  | B1 | 110 | L1 | 170 |  |  | DN 65           |
| 5  | B2 | 333 | L2 | 170 |  |  | PN6, PN10, PN16 |
| 6  | D  | 185 |    |     |  |  |                 |
| 7  | D1 | 145 |    |     |  |  | Refulare        |
| 8  | D2 | 130 |    |     |  |  | DN 65           |
| 9  | D3 | 118 |    |     |  |  | PN6, PN10, PN16 |
| 10 | D4 | 69  |    |     |  |  |                 |
| 11 | H  | 280 |    |     |  |  |                 |

MAIN\_PROJECT\_TITLE

BUSINESS\_PROCESS\_ID

OWNER\_

ISSUE\_DATE

08/11/2025