

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Expeditor

Cod articol :

102660020

Articol:

JET 82 M

Date pompa

Presiune nominala: 6 bar (600 kPa)
Temperatura min. fluid 0 °C
Temperatura max. fluid 35 °C
Temperatura max. ambianta 40 °C

Capacitate de amorsare:

H m	2	3	4	5	6	7	8	9
Q m³/h	3.06	2.76	2.46	2.28	1.92	1.74	1.32	1.02

Date de functionare cerute

Debit :
Înălțime de pompare :
Fluid pompat : Apă
Temperatura fluid: 20 °C
Densitate 998.3 kg/m³
Vascozitate cinematica: 1.005 mm²/s
Presiune de vapori: 2.34 kPa

Date disponibile:

Debit :
Înălțime de pompare :



Materiale

Corp pompa Fonta 200 UNI ISO 185
Suport Aluminu turnat la cald
Rotor Tecnopolimer A
Etansare mecanica Carbon/Ceramica
Garnitura OR Cauciuc NBR
Arbore cu rotor AISI 416 X12 CrS 13 UNI 6900/71
Grup duza difuzor venturi Tecnopolimer A

Date motor

Marca : DAB
Putere nominala P2: 0.6 kW
Viteza nominala: 2750 1/min
Tensiune nominala : 1~ 220-240 V 50 Hz
Curent nominal : 3.8 A
Grad de protecție: IP 44

Curve tolerance according to ISO 9906

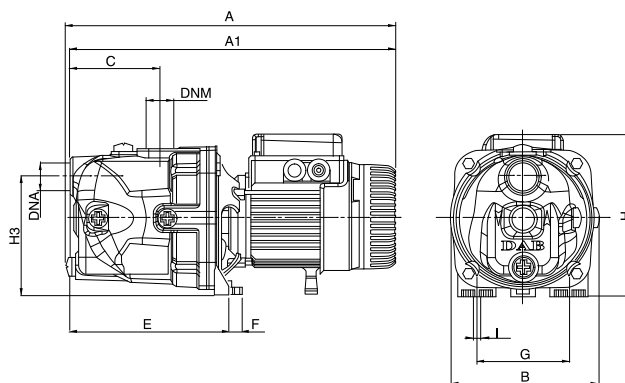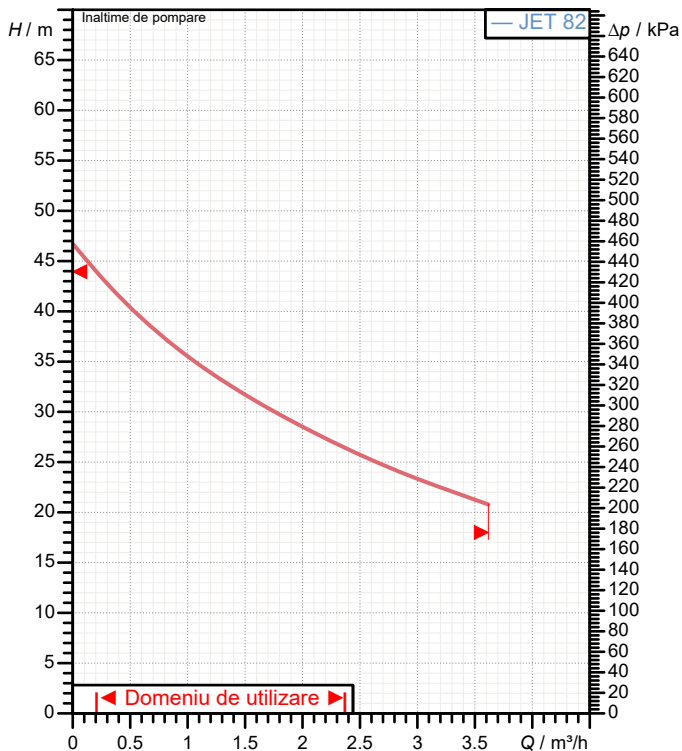

Dimensiuni de gabarit mm

A	395	DNA	1" G	G	111		
A1	395	DNM	1" G	H	193		
B	178	E	192	H3	144		
C	108	F	14	I Ø	9		

Masa 10.7 kg

Racorduri pompa:

Partea cu aspiratia: 1" G / 6 bar (600 kPa)
Partea cu refularea: 1" G / 6 bar (600 kPa)


Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

JET 82 M

Curve tolerance according to ISO 9906

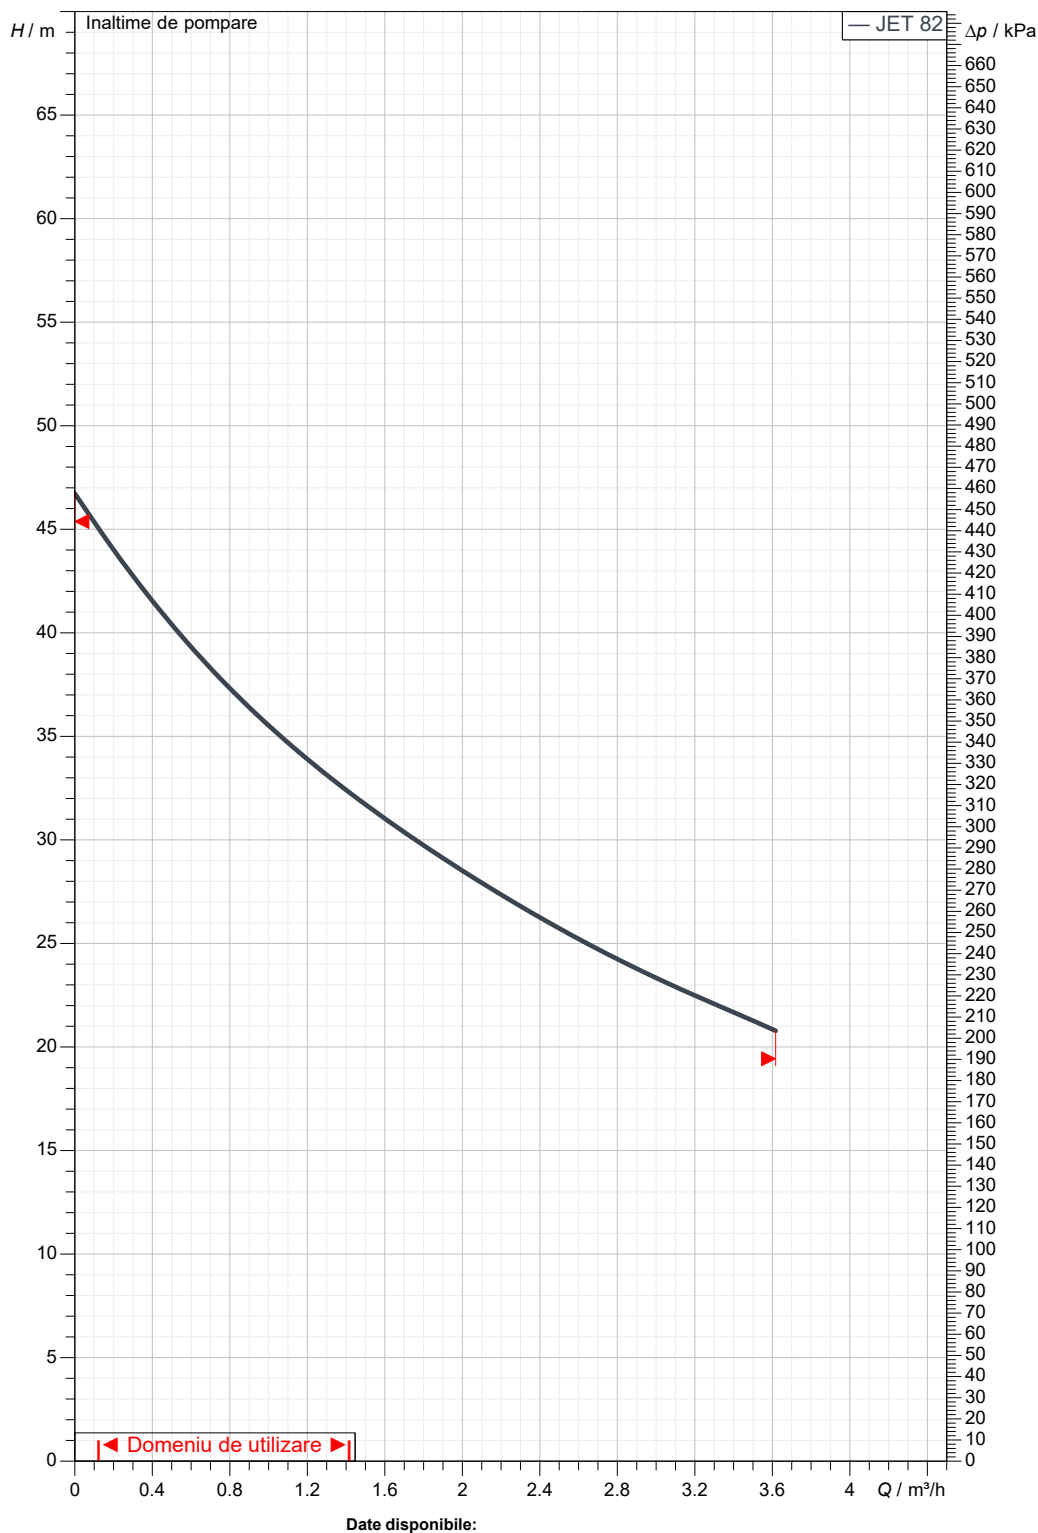

Partea cu aspiratia:

1" G

6 bar (600 kPa)

Partea cu refularea:

1" G

6 bar (600 kPa)

Debit :

Înaltime de pompare :

Viteza nominala:

2750 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IT

OWNER_

ISSUE_DATE



DESEN DIMENSIONAL

11/24/2021

Pagina 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

JET 82 M

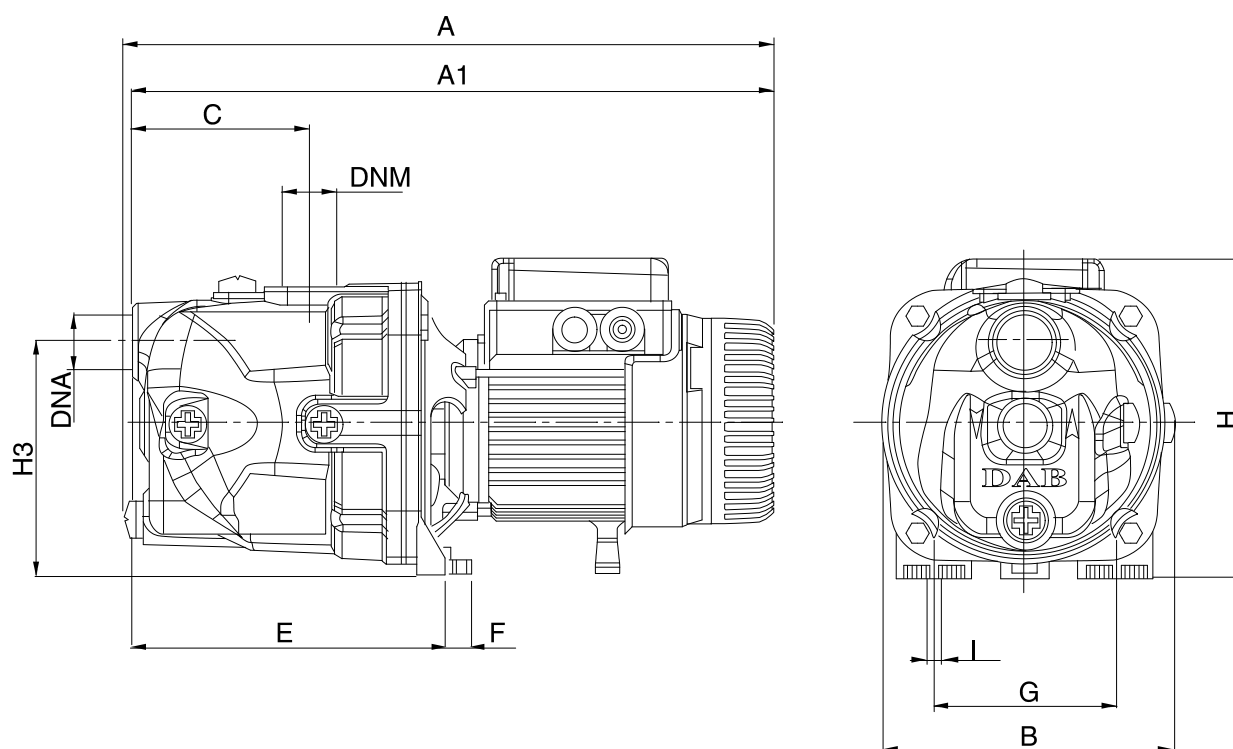

Dimensiuni in mm

Racorduri pompa:

1	A	395							
2	A1	395							
3	B	178							Aspiratie
4	C	108							1" G
5	DNa	1" G							6 bar (600 kPa)
6	DNM	1" G							
7	E	192							Refulare
8	F	14							1" G
9	G	111							6 bar (600 kPa)
10	H	193							
11	H3	144							
12	I Ø	9							

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IC

OWNER_

ISSUE_DATE