

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Expeditor

Cod articol :

60169942

Customer pos. no.:

Articol:

2 NKP-G 50-160/169 + KVCX 65/80 IE3

Date pompa

MEI $\geq 0,40$

Diametru rotor: 169 mm

Presiune nominala: 1000 kPa

Temperatura min. fluid 0 °C

Temperatura max. fluid 40 °C

Temperatura max. ambienta 40 °C

Date de functionare cerute

Debit :

Inaltime de pompare :

Fluid pompat : Apă

Temperatura fluid: 20 °C

Densitate 998.3 kg/m³

Vascozitate cinematica: 1.005 mm²/s

Presiune de vapori: 2.34 kPa

Date disponibile:

Debit :

Inaltime de pompare :

Materiale

Corp pompa Fonta 200 UNI ISO 185

Suport Fonta 200 UNI ISO 185

Rotor Fonta 200 UNI ISO 185

Etansare mecanica SEE "SHAFT SEAL" SECTION

Garnitura OR Etilen propilen EPDM

Arbore pompa AISI 304 - UNI 6900/71

Suction and discharge manifolds Galvanized steel

Date motor

Marca :

Putere nominala P2: 2 x 11 kW

Viteza nominala: 2930 1/min

Tensiune nominala : 3~ 400 V 50 Hz

Curent nominal : 2 x 19.7 A




Grad de protectie: IP 55

Racorduri pompa:

Partea cu aspiratia: DN 150 / 1000 kPa

Partea cu refularea: DN 125 / 1000 kPa

Curve tolerance according to ISO 9906

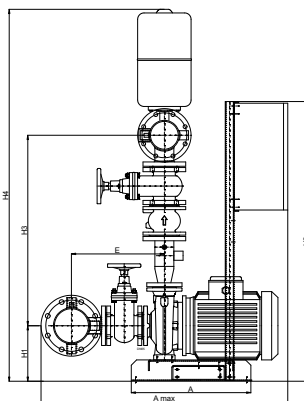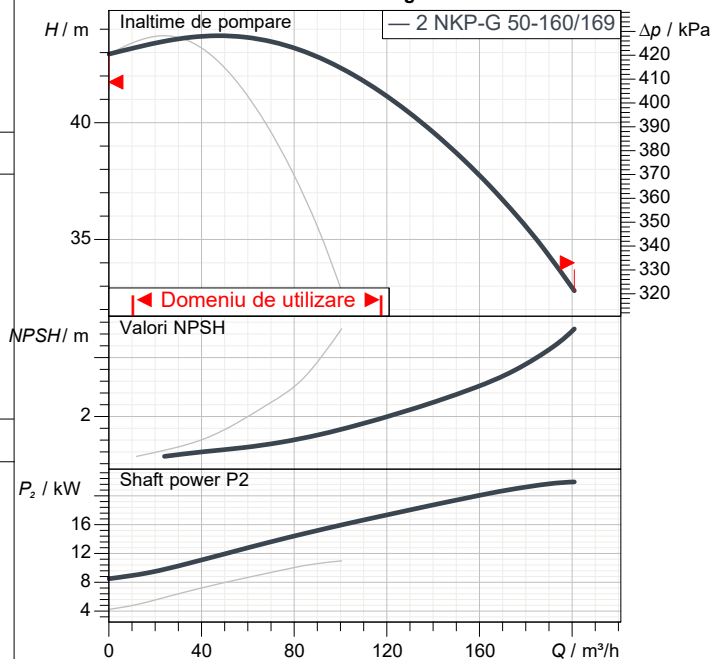

WITHOUT the jockey pump, do not consider B1 and D.

Masa

0 kg

Dimensiuni de gabarit mm

A	560	I	800
Amax	1156		
B	782		
B1	199		
C	350		
D	318		
DNA	DN 150		
DNM	DN 125		
E	435		
H1	260		
H2	1310		
H3	892		
H4	1742		


Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

2 NKP-G 50-160/169 + KVCX 65/80 IE3

Curve tolerance according to ISO 9906

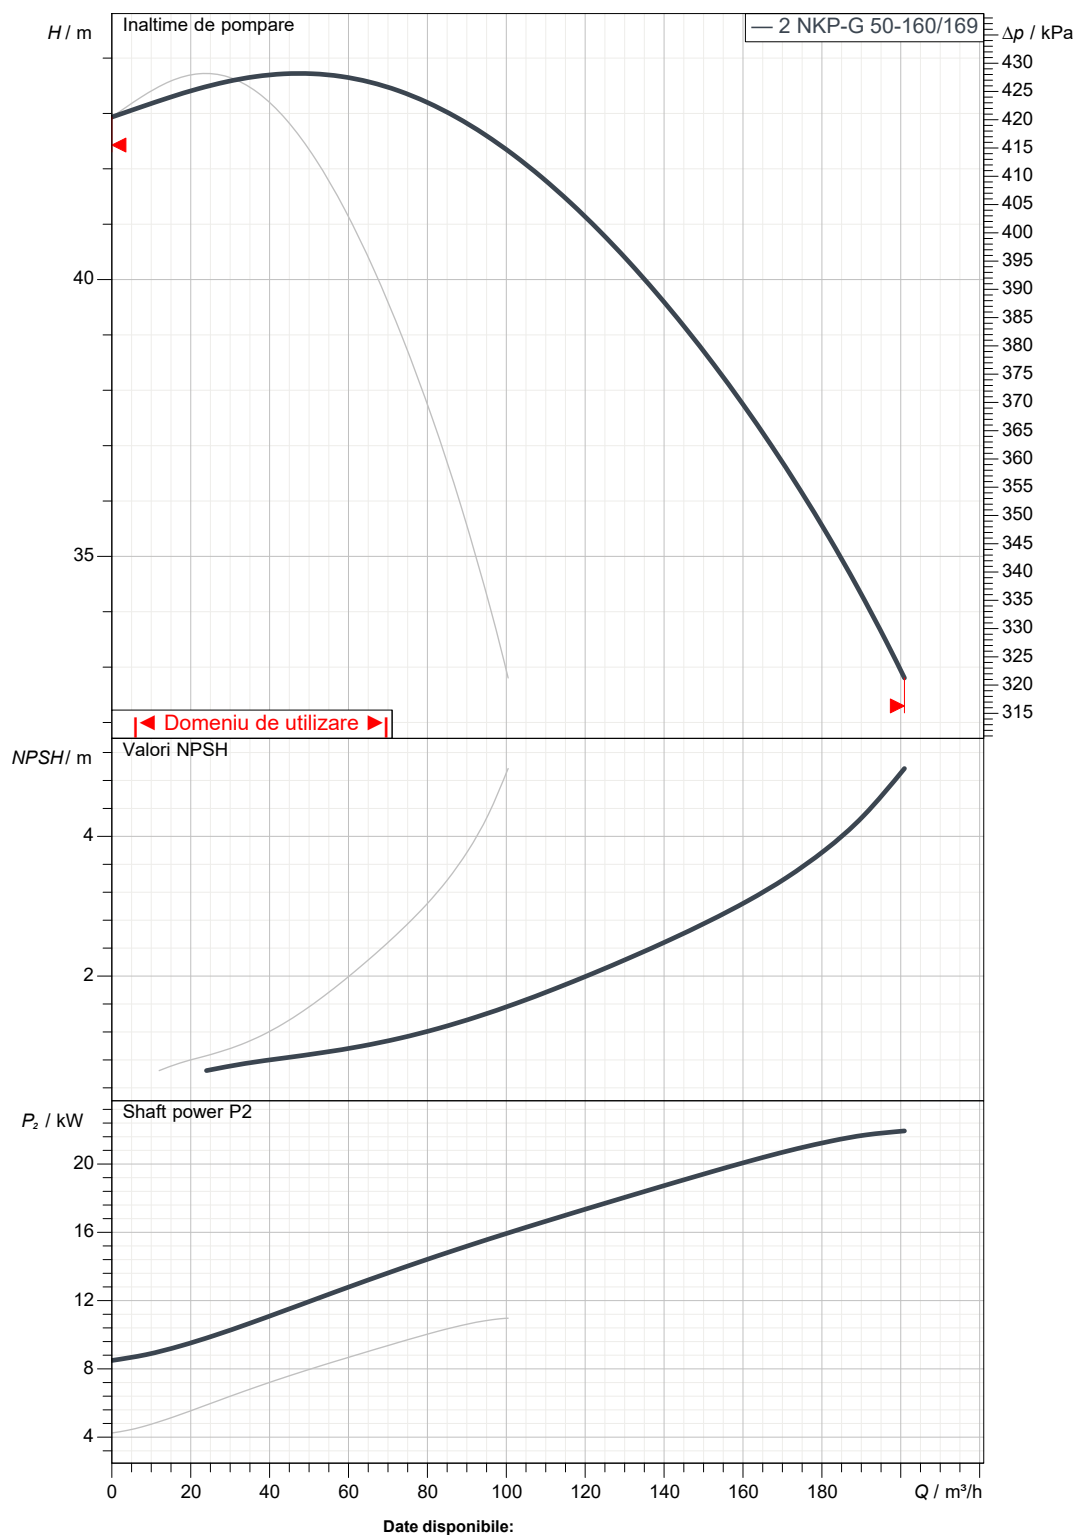

Partea cu aspiratia:
DN 150
1000 kPa

Partea cu refularea:
DN 125
1000 kPa

Debit :

Înaltime de pompare :

Viteza nominala:
2930 1/min

Oferta

ID oferta

Creat de

Creat

03/20/2024



DESEN DIMENSIONAL

03/20/2024

Pagina 3 / 3



DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Destinatar

Expedito

Firma
Referinta
Adresa
Phone
Fax
E-mail

2 NKP-G 50-160/169 + KVCX 65/80 IE3

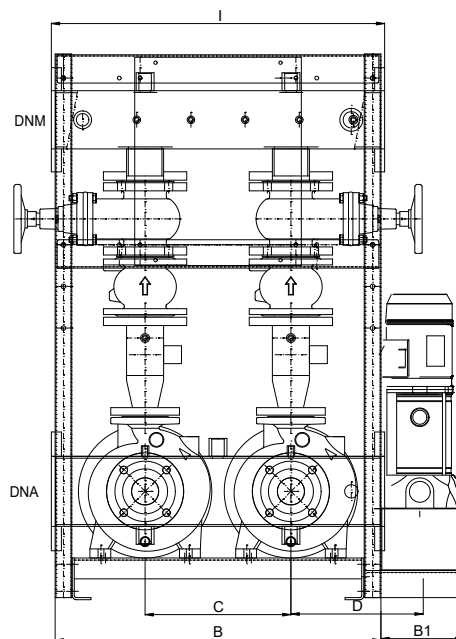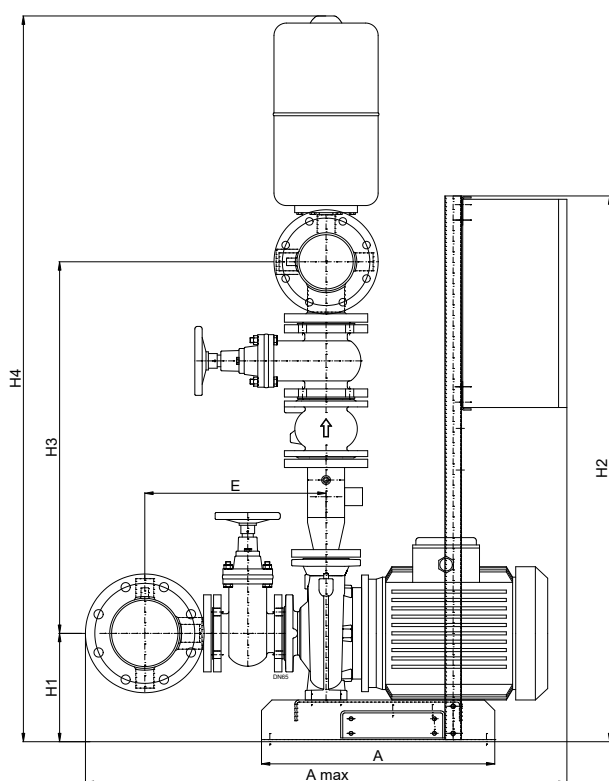

WITHOUT the jockey pump, do not consider B1 and D.

Dimensiuni in mm

Racorduri pompa:

1	A	560	H4	1742			Aspiratie
2	Amax	1156	I	800			DN 150
3	B	782					1000 kPa
4	B1	199					
5	C	350					Refulare
6	D	318					DN 125
7	DNA	DN 150					1000 kPa
8	DNM	DN 125					
9	E	435					
10	H1	260					
11	H2	1310					
12	H3	892					

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IC

OWNER_

ISSUE_DATE

03/20/2024