



AIRTAP hand dryer faucet on chrome-plated brass countertop. polished finish

Description

- Automatic electronic hand dryer in chrome-plated brass with laser sensor.
- Model for countertop mounting.
- Chrome-plated brass assembly with polished finish.
- Robust, vandal-proof and safe as it is constructed without sharp edges or other dangerous elements.
- Conforms to European safety directives (CE).

Suggested text for prescription

NOFER hand dryer, chrome-plated brass, polished finish, hot air driven by electronic sensor, 800 W power and temperature of 40°C. Motor speed 35000 r.p.m. Dimensions: 189.5 height x 45 width x 211 depth (mm).

Operation

Place your hands under the faucet. The hand dryer activates automatically, remaining in operation as long as the hands are within the sensor field. The faucet turns off a few seconds after the hands are removed.

Maintenance

Use pH-neutral soap and water for cleaning, then dry with a clean cloth. When cleaning the bathroom with aggressive products, the hand dryer should be protected from splashes.

Technical characteristics

Material: Chrome-plated brass

Finishing: Brightness

Thickness: 1.2 mm

Air outlet temperature: at an ambient temperature of 20°C, temperature: 40°C at 10 cm

Motor type: Universal

Motor speed: 35000 r.p.m.

Air velocity: 305 km/h

Air flow rate: 2660 l/min

Total power: 800 W

Engine power: 800 W

Voltage/Frequency: 220-240 V - 50/60 Hz

Electrical insulation: Class I

Distance to the sensor: 5-23 cm (with possibility of adjustment)

Double safety thermal fuse: set at 133°C

Consumption: Maximum 3.5 A

Sound level at 2 meters: 72 dBA

Projection protection index: IPX1

Dimensions: 189.5 H x 45 W x 211 D (mm)


Total net weight: 4.9 kg

Estimated drying time: 10-12 seconds

Additional Information

- Hand dryer faucet.
- Electronic laser sensor that stops the hand dryer when hands are removed from the detection field.
- With safety thermal limiter and automatic stop in case of vandalism.

Dimensional drawing

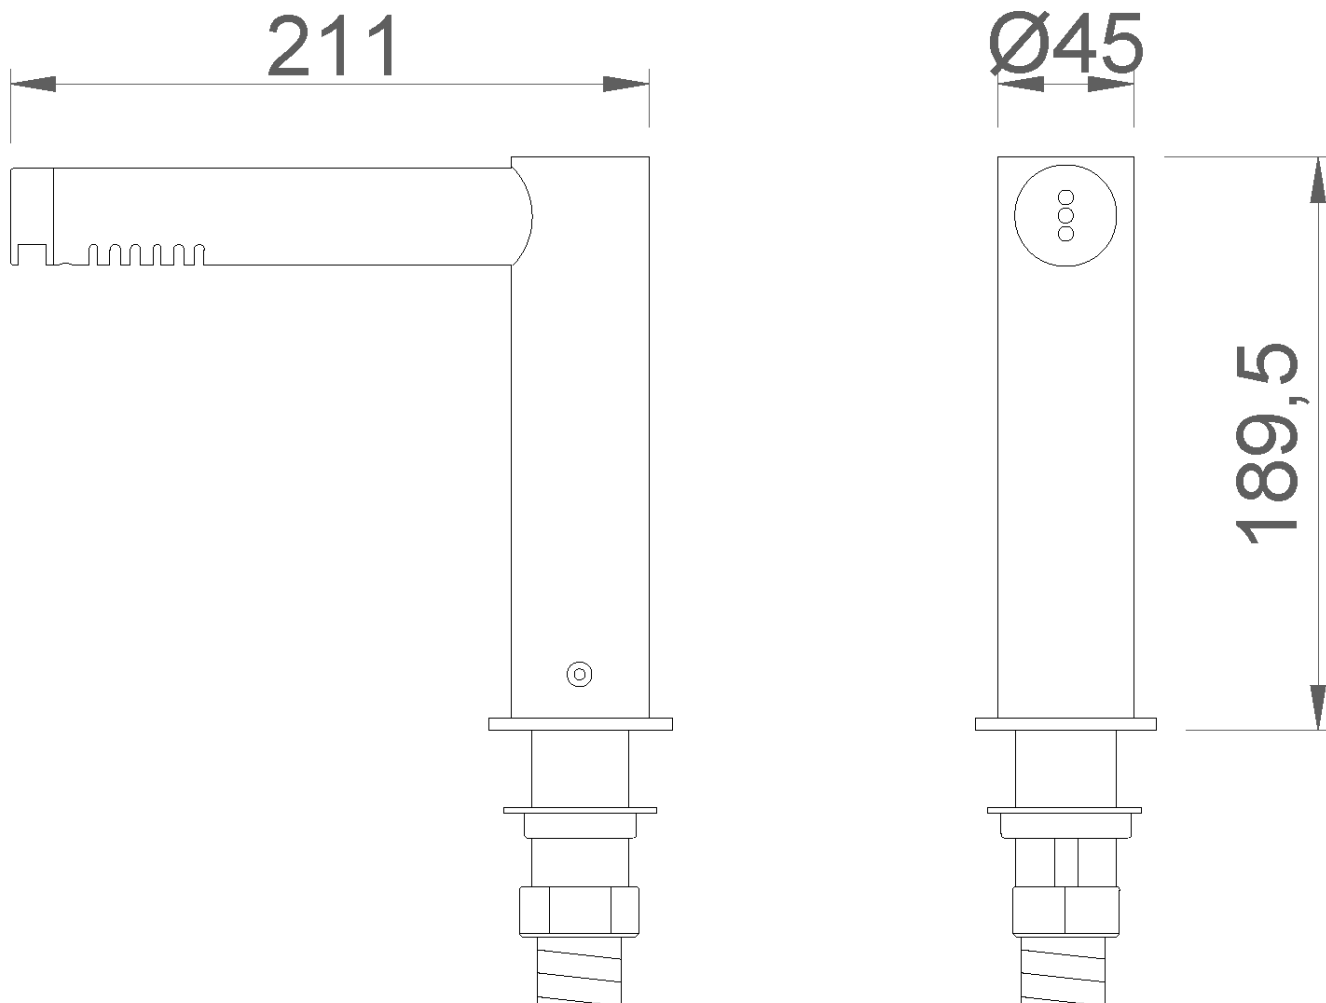

Ctra. Laureà Miró, 385-387
08980 | Sant Feliu de Llobregat,
Barcelona - Spain
T. +34 934 742 423
F. +34 934 743 548
nofer@nofer.com
www.nofer.com

RELATED
PRODUCTS



03106.B



07250.B



90329

These specifications may be modified and/or amended due to manufacturing requirements.