

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Expeditor

Cod articol : 60151002
Customer pos. no.:

Articol:

EVOPLUS D 60/220.40 M

Date pompa

Presiune nominala: 1600 kPa
Temperatura min. fluid: -10 °C
Temperatura max. fluid: 110 °C
EEI: ≤ 0,20

Presiune minima la nivelul apei:

Temperatura: °C 90 - 100
Presiune minima la nivelul apei: m 20 - 25

Date de functionare cerute

Debit:
Inaltime de pompare:
Fluid pompat (%):
Temperatura fluid: 20 °C
Densitate: 998.3 kg/m³
Vascozitate cinematica: 1.005 mm²/s
Presiune de vapori: 2.34 kPa

Date disponibile:



Debit:
Inaltime de pompare:

Materiale

Corp pompa: Cast iron 250 UNI ISO 185 - CTF
Rotor: Tecnopolimer
Arbore motor: Otel inox
Inel de etansare: EPDM
Carcasa motorului: Aluminu turnat la cald
Flansa de inchidere: Otel inox
Suport inel de echilibrare: Otel inox

Curve tolerance according to ISO 9906

Number of working motors : 1

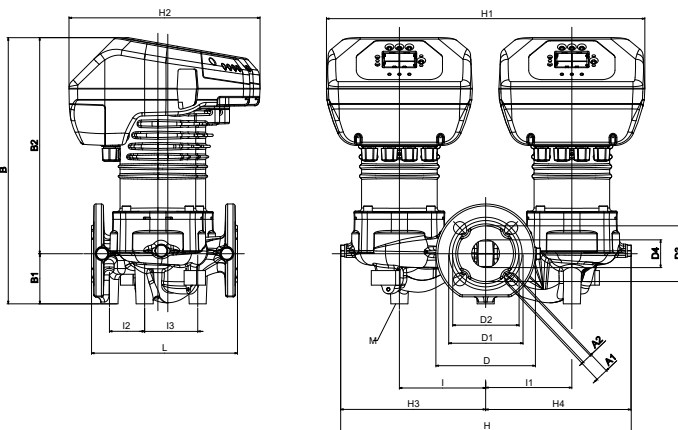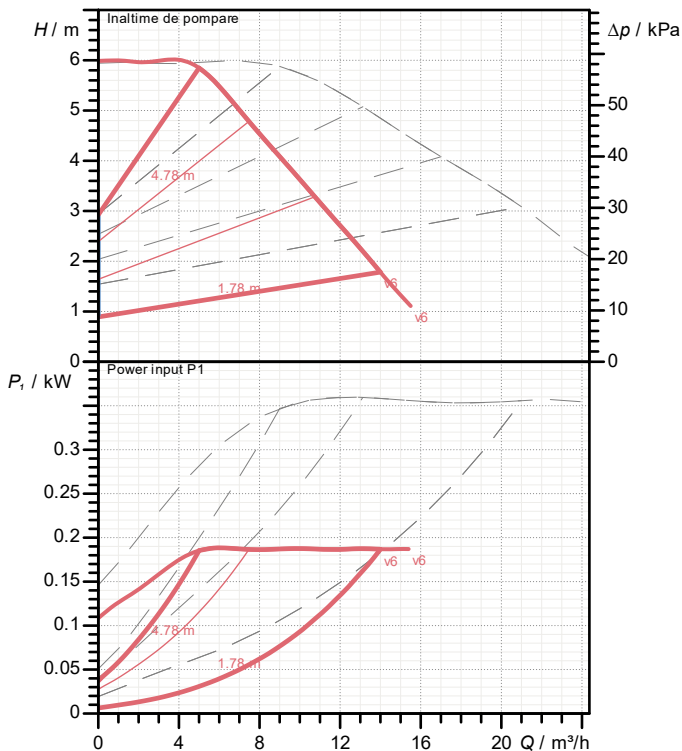

Date motor

Marca: DAB
Max. Power input P1: 1 X 0.175 kW
Tensiune nominala: 1~ 220-240 V 50 Hz
Curent nominal: 1 X 1 A
Grad de protecție: IP 44

Dimensiuni de gabarit mm

A1	19	D1	110	H2	288	I3	80
A2	14	D2	100	H3	219	L	220
B	436	D3	84	H4	218	M	M12
B1	75	D4	42	I	130		
B2	361	H	438	I1	130		
D	150	H1	480	I2	53		

Masa 38.6 kg

Racorduri pompa:

Partea cu aspiratia: DN 40 / PN6, PN10, PN16
Partea cu refularea: DN 40 / PN6, PN10, PN16

Destinatar


Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS D 60/220.40 M

Number of working motors : 1

Curve tolerance according to ISO 9906

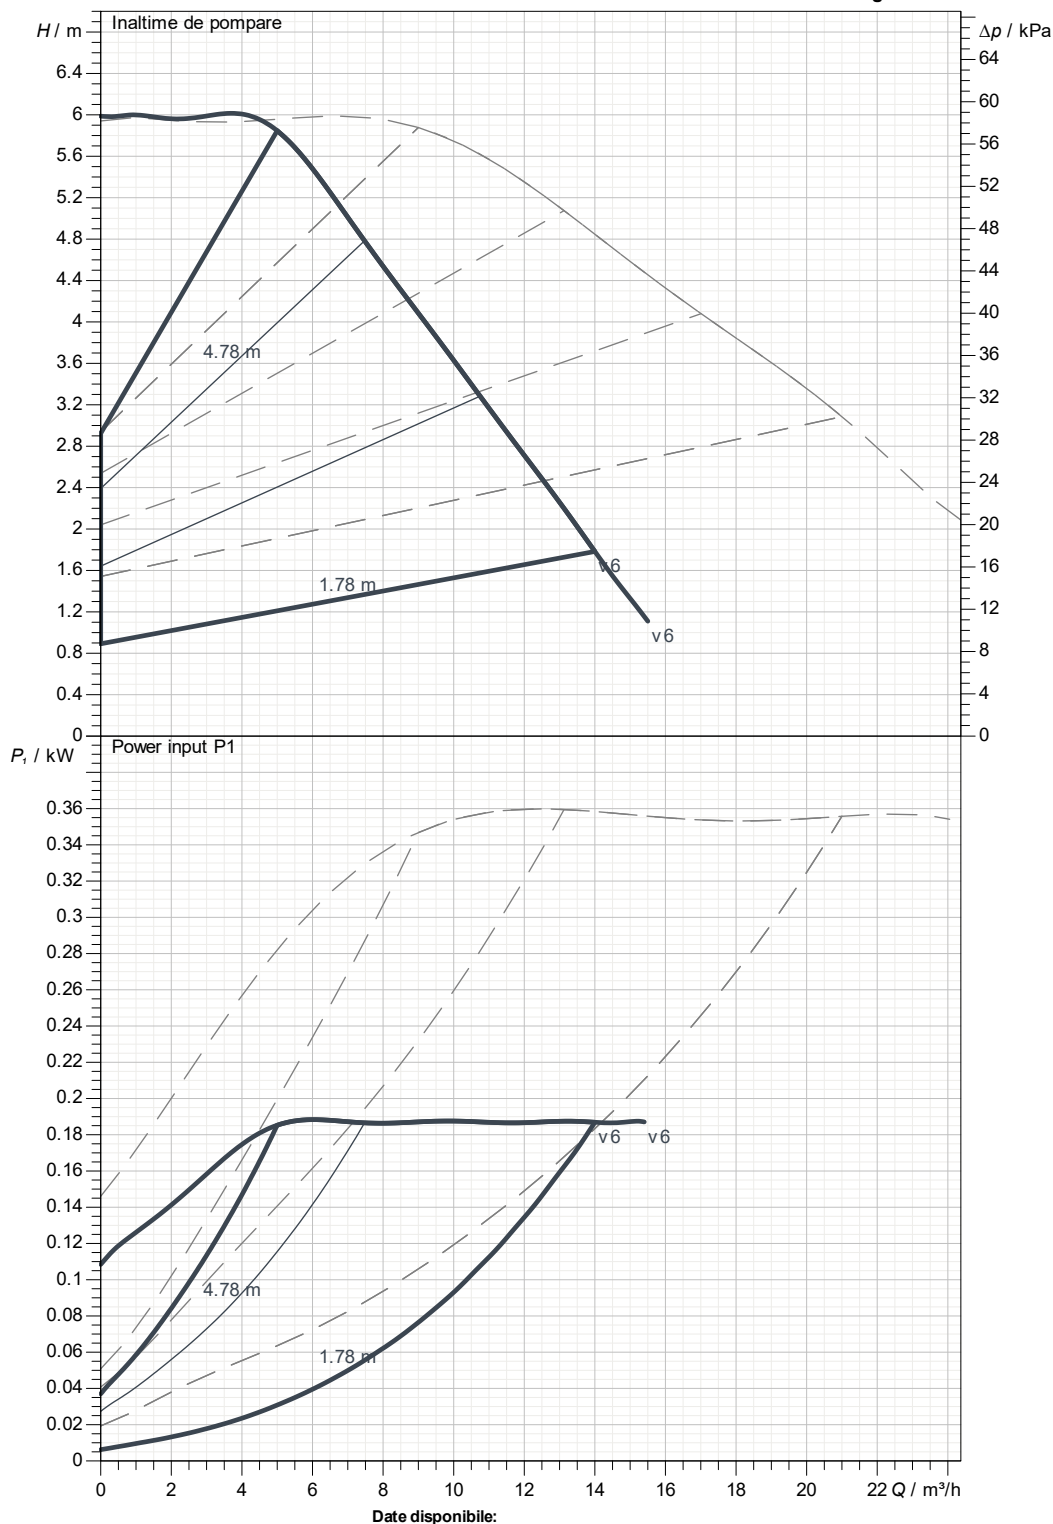

Date disponibile:

Partea cu aspiratia:

DN 40

PN6, PN10, PN16

Partea cu refularea:

DN 40

PN6, PN10, PN16

Debit :

Înăltime de pompare :

Viteza nominala:

2900 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

01/22/2025



DESEN DIMENSIONAL

01/22/2025

Pagina 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS D 60/220.40 M

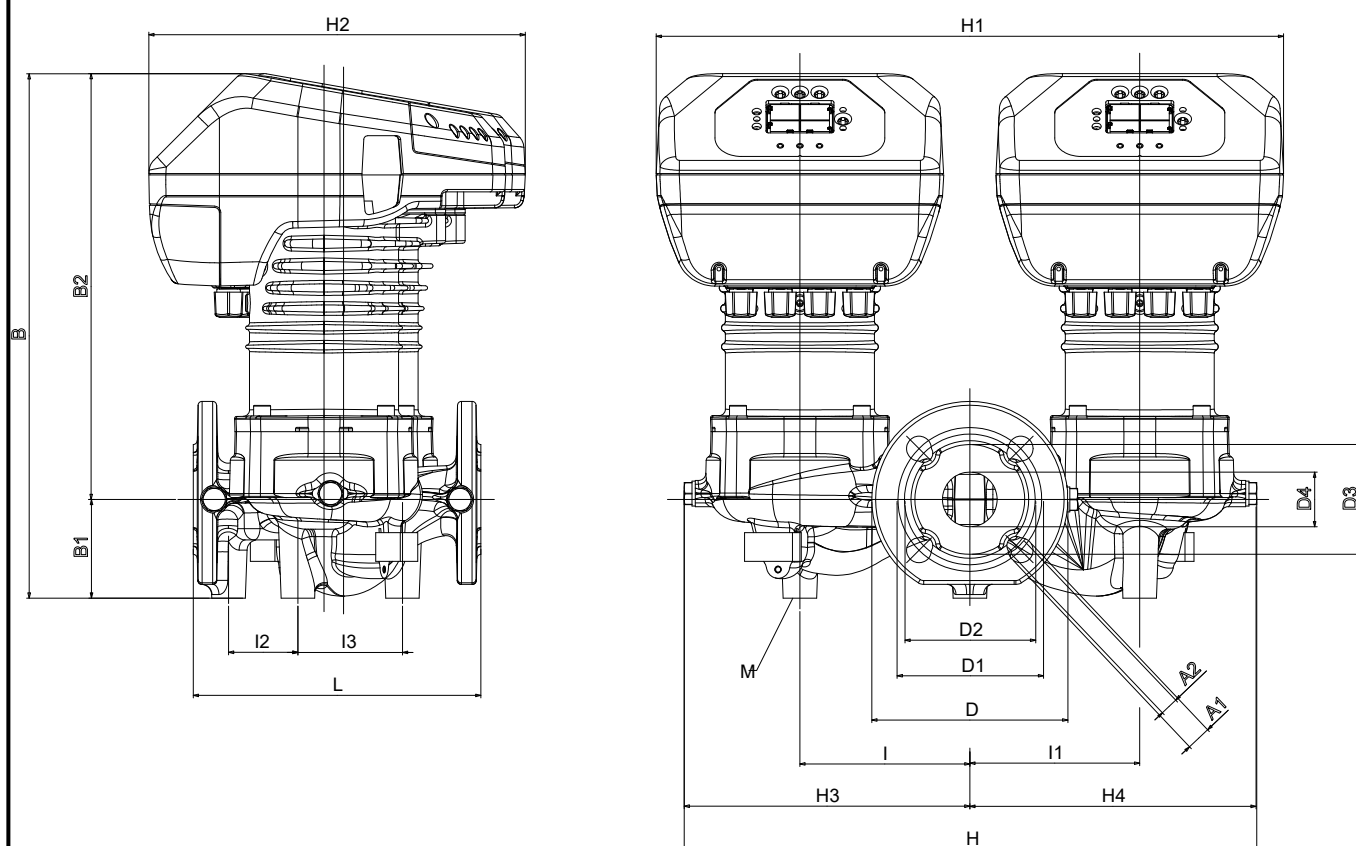

Dimensiuni in mm

Racorduri pompa:

1	A1	19	H1	480			
2	A2	14	H2	288			
3	B	436	H3	219			Aspiratie
4	B1	75	H4	218			DN 40
5	B2	361	I	130			PN6, PN10, PN16
6	D	150	I1	130			
7	D1	110	I2	53			Refulare
8	D2	100	I3	80			DN 40
9	D3	84	L	220			PN6, PN10, PN16
10	D4	42	M	M12			
11	H	438					

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

01/22/2025