



Furnizor: **MIDEA**

KITURI DE CONECTARE CTA PENTRU SISTEMELE VRF

Model: AHUKZ-00B:2.2~9kW, AHUKZ-01B:9~20kW,
AHUKZ-02B:20~36kW, AHUKZ-03B:36~56kW,
AHUKZ-00D:2.2~9kW, AHUKZ-01D:9~20Kw,
AHUKZ-02D:20~36kW, AHUKZ-03D:36~56kW

Coduri Romstal: 81MD9110, 81MD9112, 81MD9113



FISA TEHNICA

Revizia nr. 1 / februarie 2025

Inalta eficienta

Kitul control box CTA faciliteaza cresterea EER/COP a sistemului complet CTA.



Gama larga de capacitati

Pot fi utilizate in paralel 4 kituri control box, conferind un domeniu de capacitate de la 0.8CP pana la 80CP.



AHUKZ-00B: 2.2~9kW
AHUKZ-01B: 9~20kW
AHUKZ-02B: 20~36kW
AHUKZ-03B: 36~56kW




AHUKZ-00D: 2.2~9kW
AHUKZ-01D: 9~20kW
AHUKZ-02D: 20~36kW
AHUKZ-03D: 36~56kW

Compatibile cu Sistemele VRF


Kiturile control box CTA sunt compatibile cu unitatile externe Midea VRF si pot fi utilizate impreuna cu toate tipurile de unitati interne Midea VRF.



Conexiune cu un Kit control box CTA

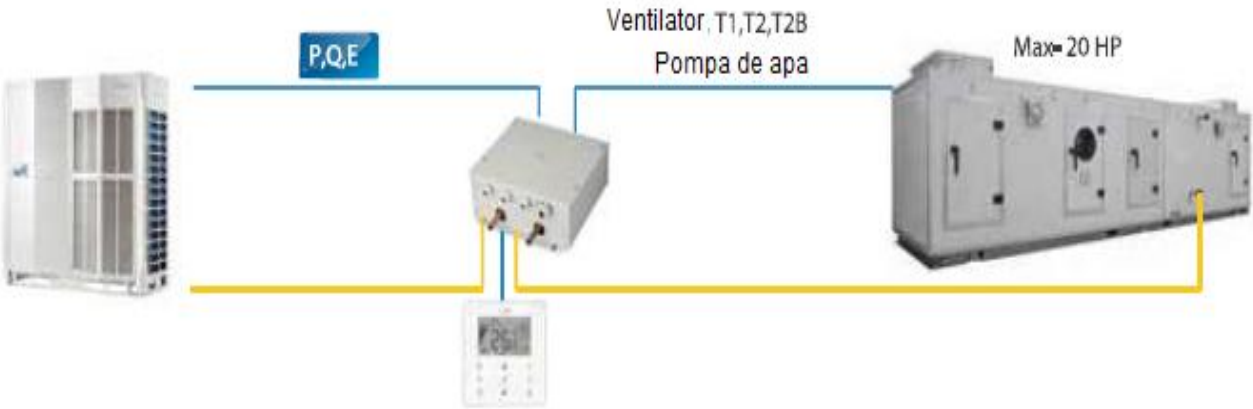

Conexiune cu mai multe Kit-uri control box CTA

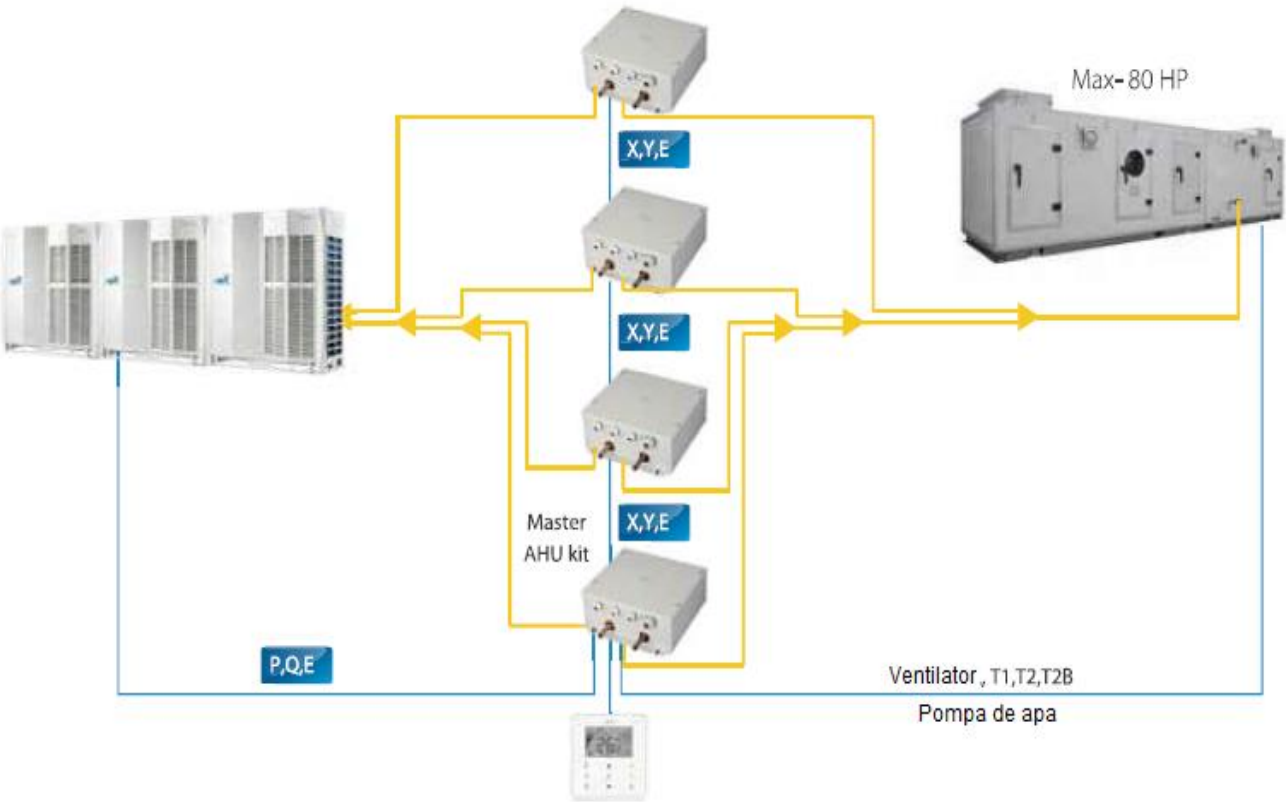

Specificatii

Denumire model	AHUKZ-00D	AHUKZ-01D	AHUKZ-02D	AHUKZ-03D
Capacitate A (kW)	$2.2 \leq A < 9$	$9 \leq A \leq 20$	$20 < A \leq 36$	$36 < A \leq 56$
Alimentare electrica	220-240V~50/60Hz			
Teava de lichid (tur/retur) (mm)	$\Phi 9.53/\Phi 9.53$	$\Phi 9.53/\Phi 9.53$	$\Phi 12.7/\Phi 12.7$	$\Phi 15.9/\Phi 15.9$
Dimensiuni (WxHxD) (mm)	341x133x395			
Masa (kg)	5.7	5.7	5.8	6.0
Domeniu de functionare (racire pe baterie) (°C)	17-43			
Domeniu de functionare (incalzire pe baterie) (°C)	10-30			
Unitati externe aplicabile	Pompa de caldura /recuperare caldura /numai racire			

Denumire model	AHUKZ-00B	AHUKZ-01B	AHUKZ-02B	AHUKZ-03B
Capacitate A (kW)	$2.2 \leq A < 9$	$9 \leq A \leq 20$	$20 < A \leq 36$	$36 < A \leq 56$
Alimentare electrica	220-240V~50/60Hz			
Teava de lichid (tur/retur) (mm)	$\Phi 9.53/\Phi 9.53$	$\Phi 9.53/\Phi 9.53$	$\Phi 12.7/\Phi 12.7$	$\Phi 15.9/\Phi 15.9$
Dimensiuni (WxHxD) (mm)	350x150x375			
Masa (kg)	8.4	8.4	8.7	8.9
Domeniu de functionare (racire pe baterie) (°C)	17-43			
Domeniu de functionare (incalzire pe baterie) (°C)	5-30			
Unitati externe aplicabile	Pompa de caldura/numai racire			

Colectivul de redactare a cartii tehnice:

Traducere:

Iuliana BELEGANTE

Tehnoredactare:

Iuliana BELEGANTE



Tel: 0372.123.101
Fax: 021.334.51.60



office@romstal.ro
www.romstal.ro



Sos. Vitan-Barzesti nr. 11A,
sector 4, Bucuresti

Reg. Com. J40/14205/1994 • Cod unic de înregistrare: 5990324 • Capital Social: 10.873.200 lei

Identificator Unic la Nivel European (EUID): ROONRC.J40/14205/1994

Conturi: RO53 INGB 0001 0001 4645 8915 ING Bank Bucuresti • RO88 BRDE 450S V009 7703 4500 BRD GSG SMCC