

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Cod articol :

60217358

Customer pos. no.:

Articol:

Esy Box Max 45/120 Pump 1x208-240 50/60 No Plug

Esybox Max with Esydock

Date pompa

Presiune nominala: 1200 kPa
Constant pressure range: 100 - 1200 kPa (300 kPa by default)
Temperatura min. fluid: 0 °C
Temperatura max. fluid: 50 °C
Temperatura max. ambianta: 55 °C

Date de functionare cerute

Debit :
Înaltime de pompare :
Fluid pompat : Apă
Temperatura fluid: 20 °C
Densitate: 998.3 kg/m³
Vascozitate cinematica: 1.005 mm²/s
Presiune de vapori: 2.34 kPa


Materiale

Fitting: Technopolymer PA66 30%GF
Manifold: Otel inox AISI 304
Flange: Technopolymer PA66 30%GF
Corp pompa: Technopolymer PA66 30%GF
Pump body ring: Technopolymer PP 30%GF
Rotor: Technopolymer PP 30%GF/AISI 304
Difuzor: Technopolymer PP 30%GF/AISI 304
Motor axis: Otel inox AISI 303
Garnitura OR: EPDM
Motor flange: Technopolymer PA66 30%GF
Etansare mecanica: Impregnated carbon-resin/Silicon carbide/EPDM
Motor liner: Otel inox AISI 304
Corp motor: Technopolymer PA66 30%GF
Conveyor tube: Technopolymer PP 30%GF
Pressure sensor: Nylon/EPDM
Non-return valve: POM/EPDM/AISI 302
Non-return valve body: Technopolymer PA66 30%GF
Tank: Noryl/Rubber
Delivery body: Technopolymer PA66 30%GF
Outer liner: Otel inox AISI 304

Date motor


Max. Power input P1: 1 x 1.97 kW
Maximum speed: 5240 1/min
Tensiune nominala: 1~ 208-240 V 50 Hz
Curent nominal: 1 x 9.4 A
Grad de protectie: IP X5

Curve tolerance according to ISO 9906

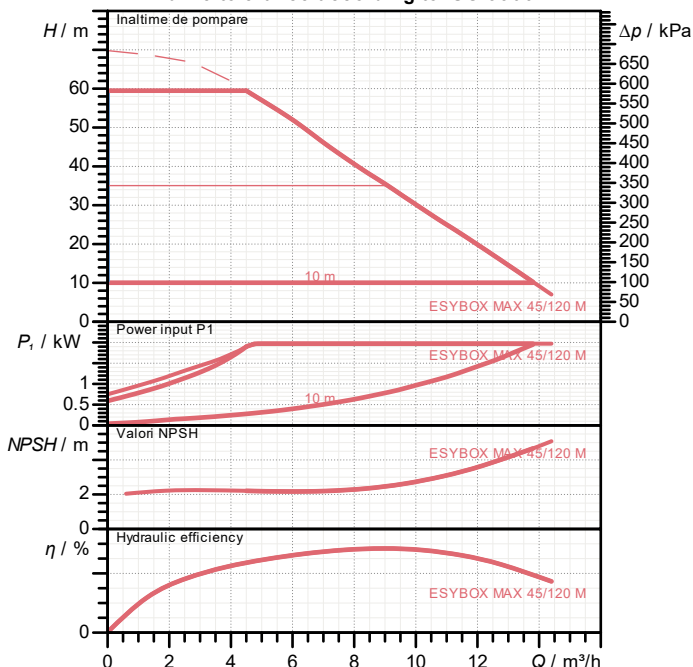

Date disponibile:

Debit :
Înaltime de pompare :

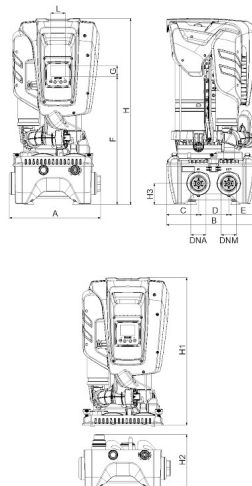

Dimensiuni de gabarit mm

A	375	E	127.7	H3	87
B	384	F	526	L	59.5
C	131.8	G	45		
D	124.5	H	766		
DNA	1"1/4 - 2"	H1	613		
DNM	1"1/4 - 2"	H2	228		

Masa 38 kg

Racorduri pompa:

Partea cu aspiratia: 1"1/4 - 2" G / 1200 kPa
Partea cu refularea: 1"1/4 - 2" G / 1200 kPa

ENERGY SAVING

BEFORE

AFTER

- **20%**
Compared with
traditional inverter pump



D+CONNECT
BUILT-IN



As quick as a "click"




Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

EsyBox Max 45/120 Pump 1x208-240 50/60 No Plug

Curve tolerance according to ISO 9906

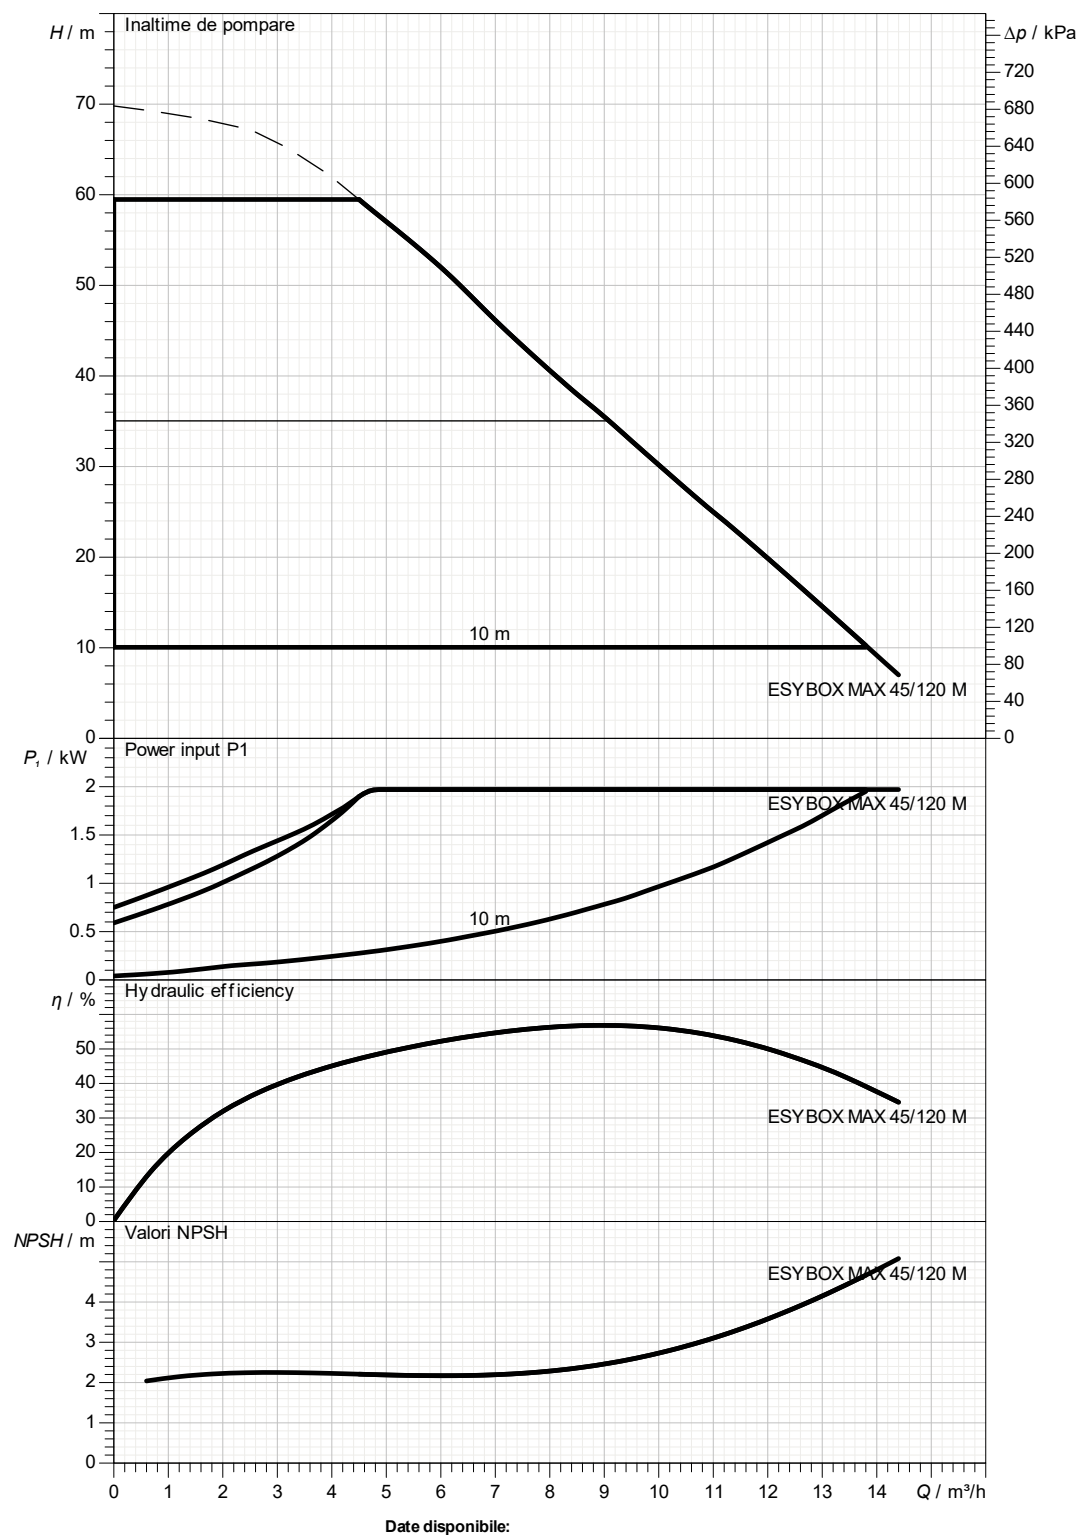

Partea cu aspiratia:
1"1/4 - 2" G
1200 kPa

Partea cu refularea:
1"1/4 - 2" G
1200 kPa

Debit :

Înăltime de pompare :

Viteza nominala:
5240 1/min

Oferta

ID oferta

Creat de


Creat

08/03/2026

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

EsyBox Max 45/120 Pump 1x208-240 50/60 No Plug

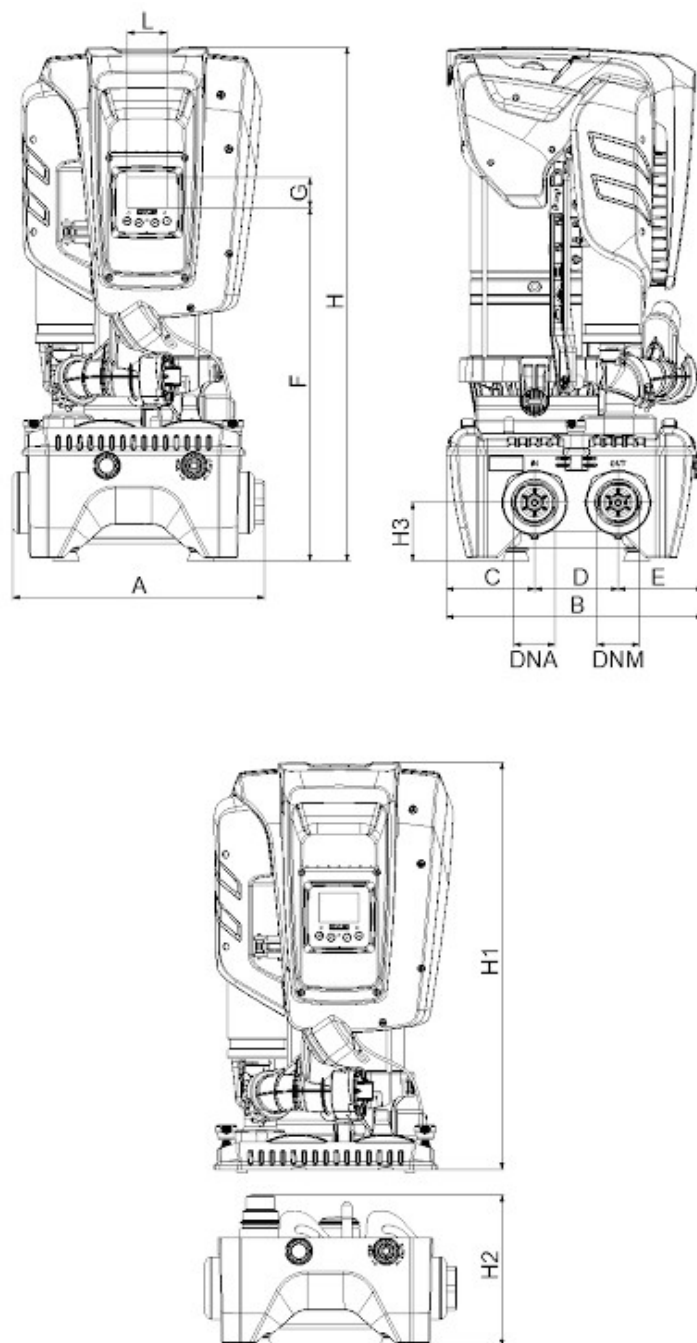

Dimensiuni in mm

Racorduri pompa:

1	A	375	H2	228			
2	B	384	H3	87			Aspiratie
3	C	131.8	L	59.5			1"1/4 - 2" G
4	D	124.5					1200 kPa
5	DNA	1"1/4 - 2"					
6	DNM	1"1/4 - 2"					Refulare
7	E	127.7					1"1/4 - 2" G
8	F	526					1200 kPa
9	G	45					
10	H	766					
11	H1	613					

Oferta

ID oferta

Creat de

Creat

08/03/2026