

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Expeditor

Cod articol : 60220930
Customer pos. no.:

Articol:
EVOPLUS D 120/450.100 M

Date pompa

Presiune nominala: 1600 kPa
Temperatura min. fluid: -10 °C
Temperatura max. fluid: 110 °C
EEI: ≤ 0,20

Presiune minima la nivelul apei:

Temperatura: °C 90 - 100
Presiune minima la nivelul apei: m 20 - 25

Date de functionare cerute

Debit:
Inaltime de pompare:
Fluid pompat (%):
Temperatura fluid: 20 °C
Densitate: 998.3 kg/m³
Vascozitate cinematica: 1.005 mm²/s
Presiune de vapori: 2.34 kPa



Date disponibile:

Debit:
Inaltime de pompare:

Materiale

Corp pompa: Cast iron 250 UNI ISO 185 with Cataphoresis
Rotor: Tecnopolimer
Arbore motor: Otel inox
Inel de etansare: EPDM
Carcasa motorului: Die cast aluminium with Cataphoresis
Flansa de inchidere: Otel inox
Suport inel de echilibrare: Otel inox

Curve tolerance according to ISO 9906 Number of working motors : 1

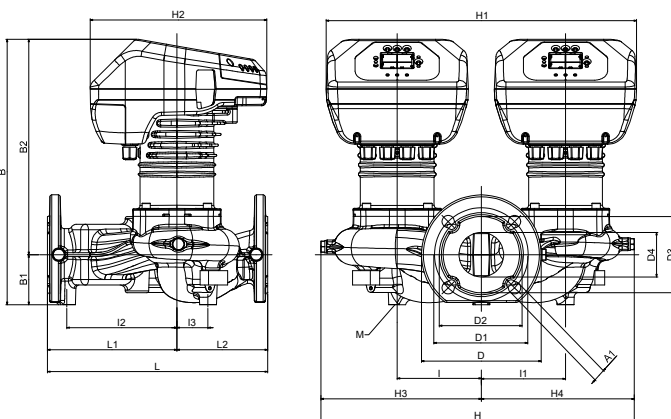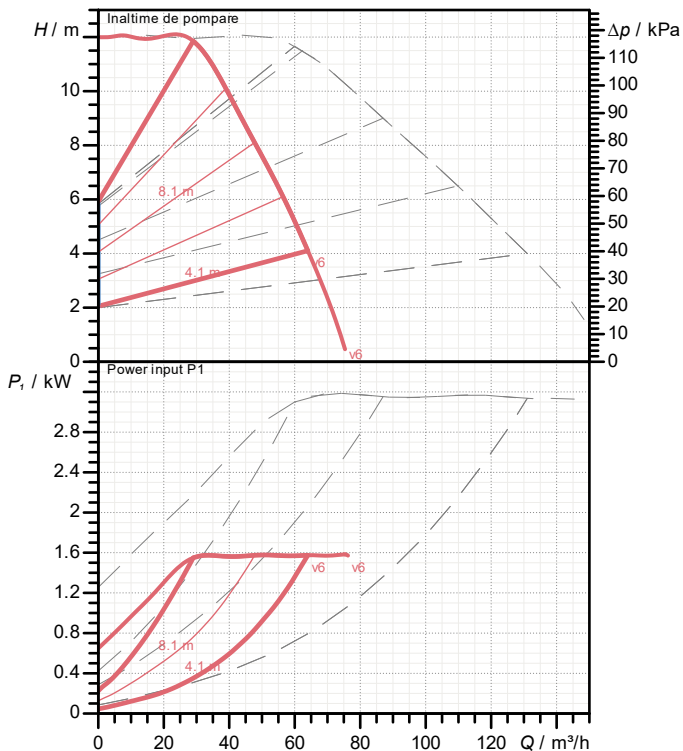

Date motor

Marca: DAB
Max. Power input P1: 1 X 1.56 kW
Tensiune nominala: 1~ 220-240 V 50 Hz
Curent nominal: 1 X 7 A
Grad de protecție: IP 44

Dimensiuni de gabarit mm

A1	19	D3	156	H4	252	L1	260
B	456	D4	105	I	135	L2	190
B1	103	H	517	I1	135	M	M12
B2	353	H1	490	I2	200		
D	220	H2	273	I3	43		
D1	180	H3	265	L	450		

Masa 67.8 kg

Racorduri pompa:

Partea cu aspiratia: DN 100 / PN6, PN10
Partea cu refularea: DN 100 / PN6, PN10

Destinatar


Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS D 120/450.100 M

Number of working motors : 1

Curve tolerance according to ISO 9906

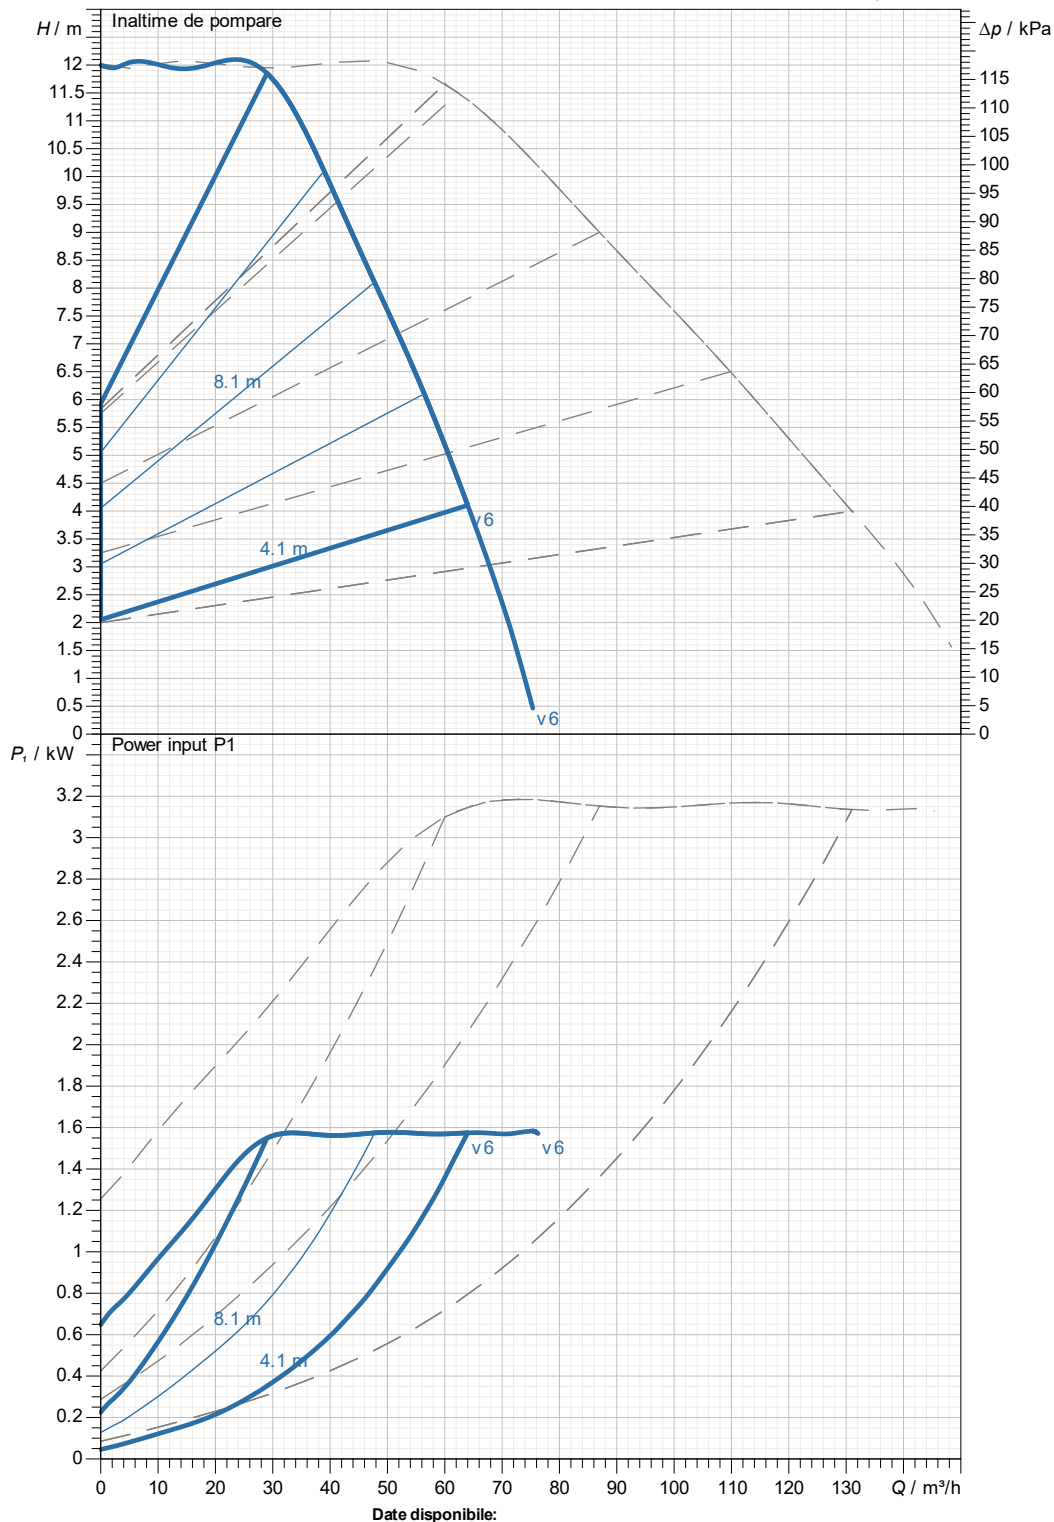

Partea cu aspiratia:

DN 100

PN6, PN10

Partea cu refularea:

DN 100

PN6, PN10

Debit :

Înăltime de pompare :

Viteza nominala:

2900 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

11/18/2025



DESEN DIMENSIONAL

11/18/2025

Pagina 3 / 3



DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS D 120/450.100 M

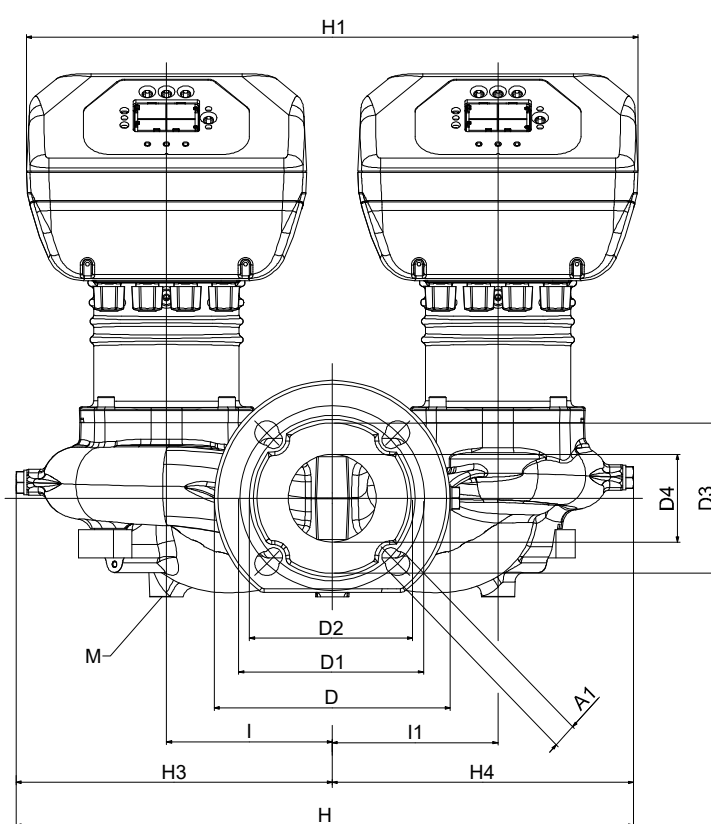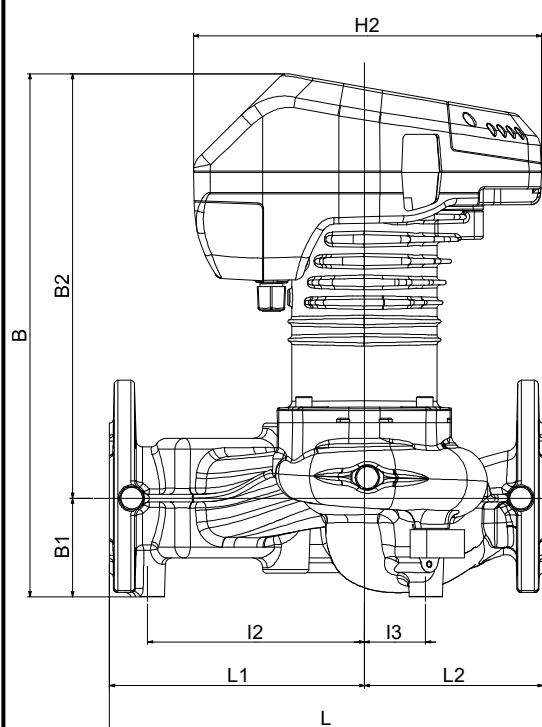

Dimensiuni in mm

Racorduri pompa:

1	A1	19	H3	265				
2	B	456	H4	252				
3	B1	103	I	135				Aspiratie
4	B2	353	I1	135				DN 100
5	D	220	I2	200				PN6, PN10
6	D1	180	I3	43				
7	D3	156	L	450				Refulare
8	D4	105	L1	260				DN 100
9	H	517	L2	190				PN6, PN10
10	H1	490	M	M12				
11	H2	273						

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

11/18/2025