

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Cod articol : 60231425
Customer pos. no.:

Articol:
EVOPLUS D 150/250.40 M

Date pompa

Presiune nominala: 1600 kPa
Temperatura min. fluid: -10 °C
Temperatura max. fluid: 110 °C
EEI: ≤ 0,20

Presiune minima la nivelul apei:

Temperatura: °C 90 - 100
Presiune minima la nivelul apei: m 20 - 25

Date de functionare cerute

Debit:
Inaltime de pompare:
Fluid pompat (%):
Temperatura fluid: 20 °C
Densitate: 998.3 kg/m³
Vascozitate cinematica: 1.005 mm²/s
Presiune de vapori: 2.34 kPa

Date disponibile:

Debit:
Inaltime de pompare:



Materiale

Corp pompa: Cast iron 250 UNI ISO 185 with Cataphoresis
Rotor: Tecnopolimer
Arbore motor: Otel inox
Inel de etansare: EPDM
Carcasa motorului: Die cast aluminium with Cataphoresis
Flansa de inchidere: Otel inox
Suport inel de echilibrare: Otel inox

Date motor

Marca: DAB
Max. Power input P1: 1 X 0.61 kW
Tensiune nominala: 1~ 220-240 V 50 Hz
Curent nominal: 1 X 2.9 A
Grad de protecție: IP 44

Curve tolerance according to ISO 9906
Number of working motors : 1

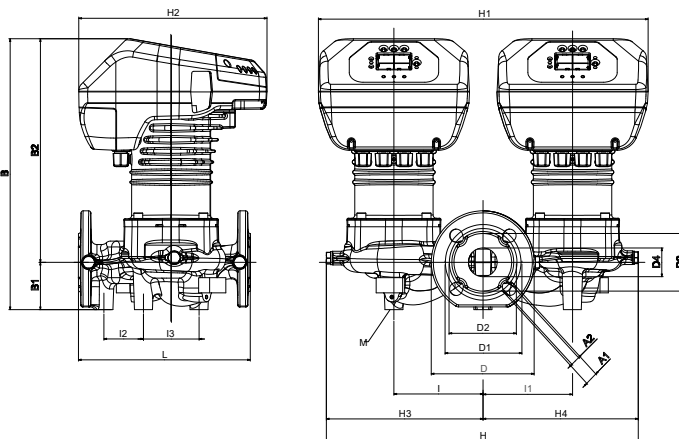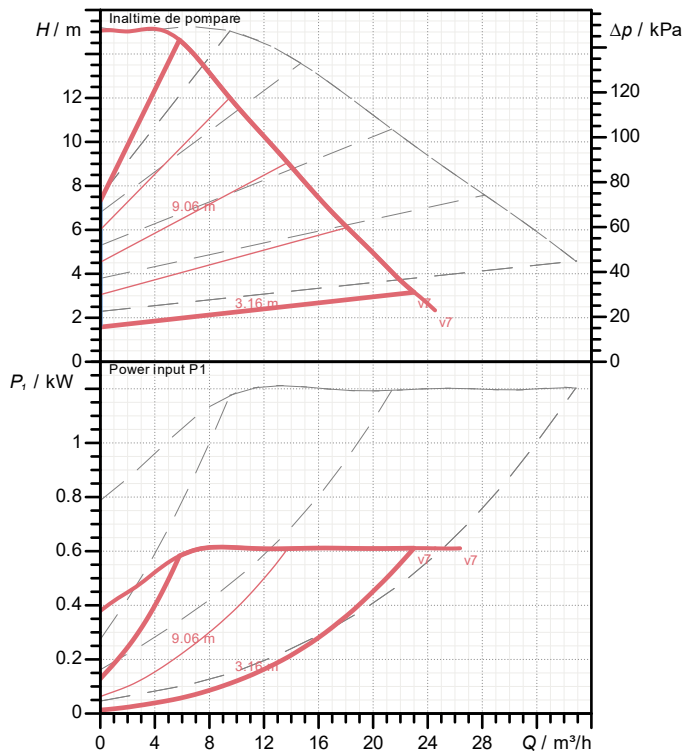

Dimensiuni de gabarit mm

A1	19	D1	110	H2	274	I3	81
A2	14	D2	100	H3	228	L	250
B	395	D3	84	H4	226	M	M12
B1	69	D4	42	I	130		
B2	326	H	454	I1	130		
D	150	H1	480	I2	58		

Masa 38.8 kg

Racorduri pompa:


Partea cu aspiratia: DN 40 / PN6, PN10, PN16
Partea cu refularea: DN 40 / PN6, PN10, PN16

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS D 150/250.40 M
Number of working motors : 1

Curve tolerance according to ISO 9906

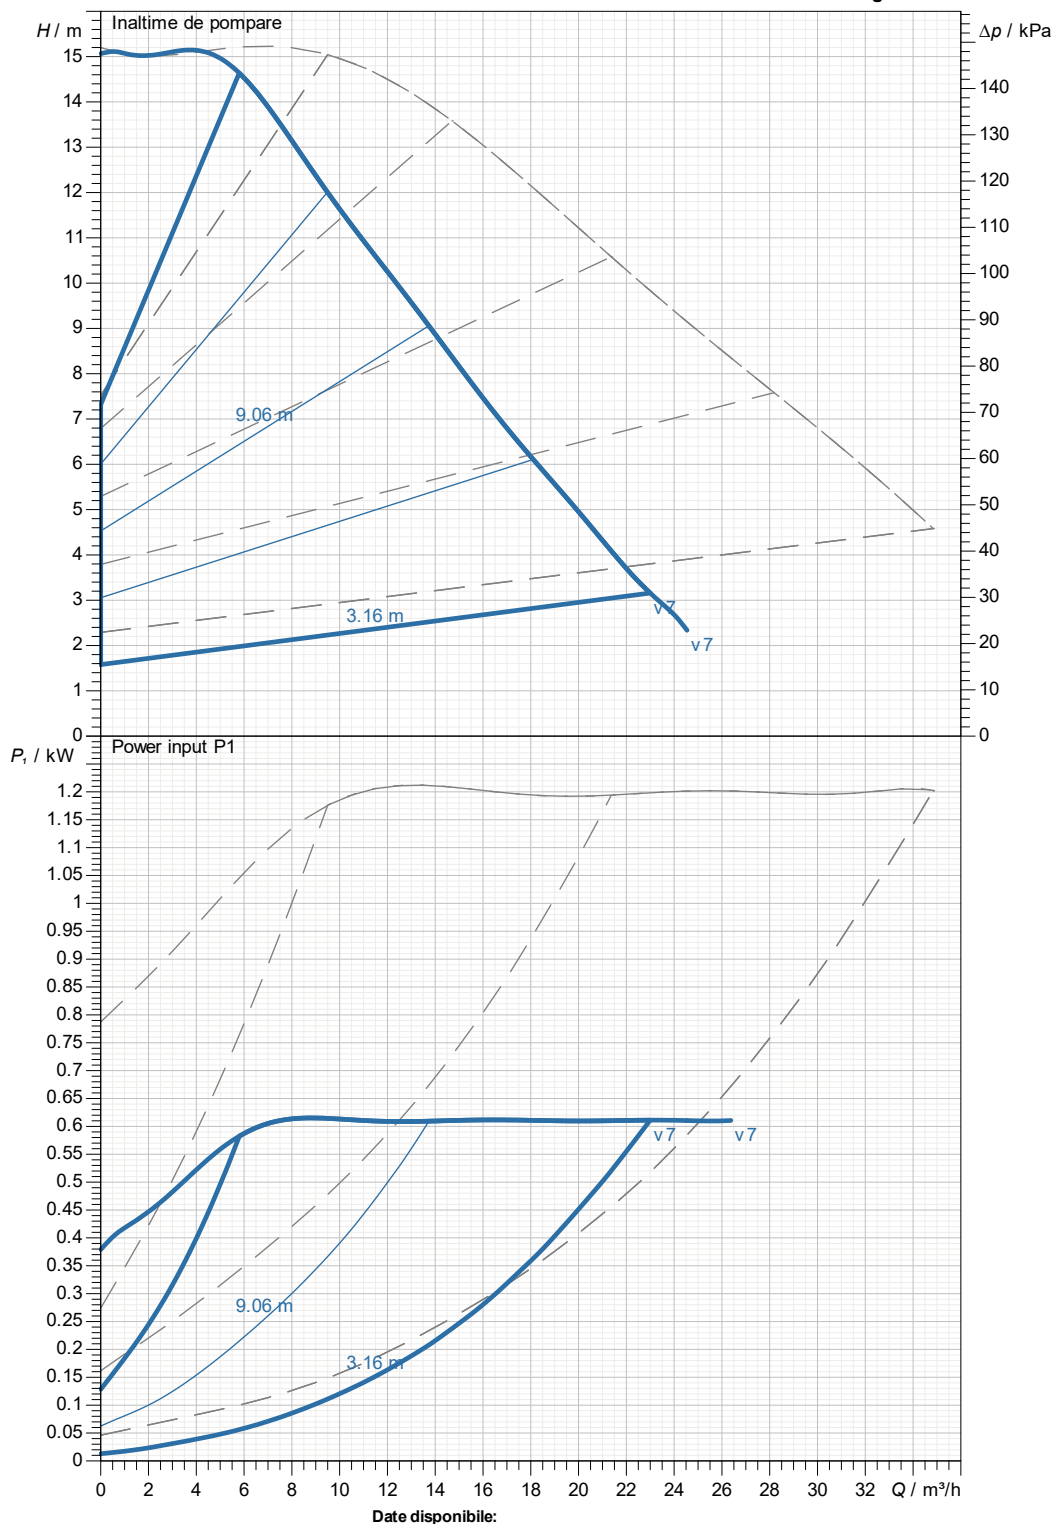

Date disponibile:

Partea cu aspiratia:

DN 40

PN6, PN10, PN16

Partea cu refularea:

DN 40

PN6, PN10, PN16

Debit :

Înăltime de pompare :

Viteza nominala:

2900 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_



ISSUE_DATE

06/18/2026

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

EVOPLUS D 150/250.40 M

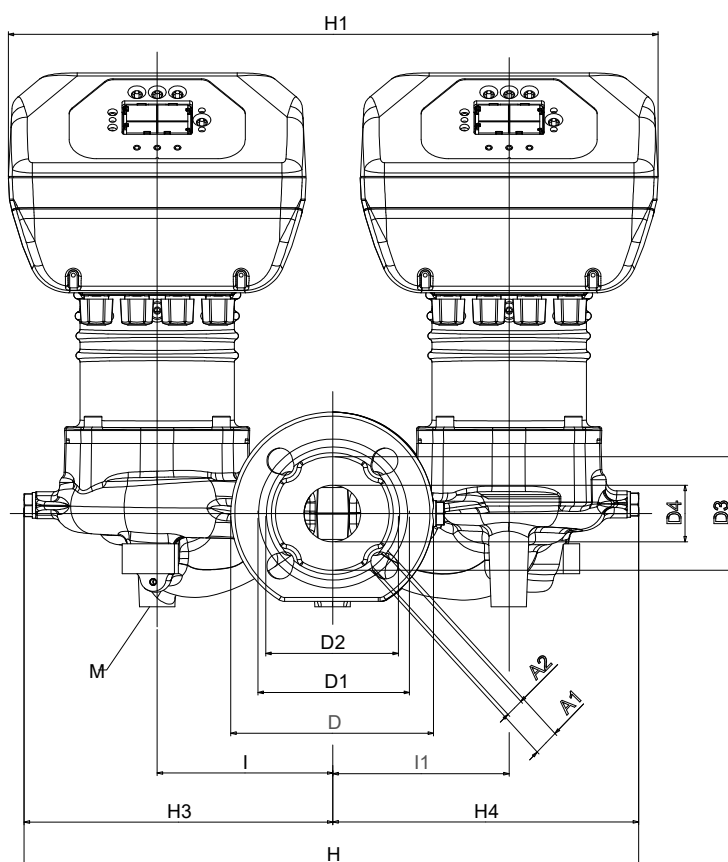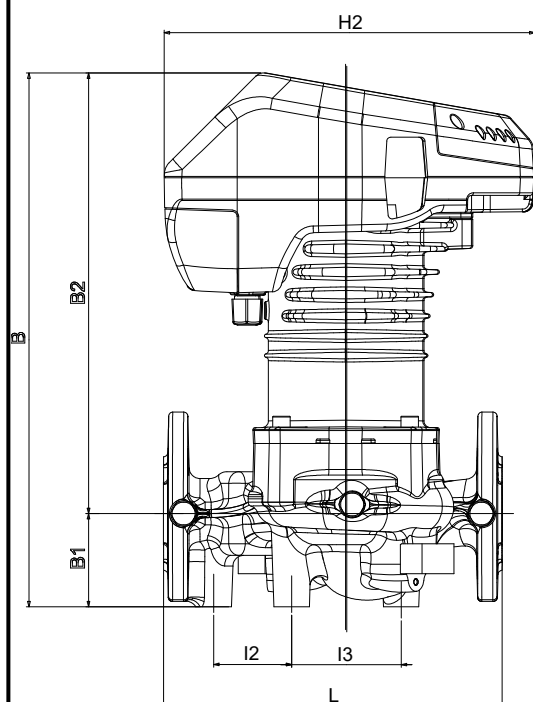

Dimensiuni in mm

Racorduri pompa:

1	A1	19	H1	480			
2	A2	14	H2	274			
3	B	395	H3	228			Aspiratie
4	B1	69	H4	226			DN 40
5	B2	326	I	130			PN6, PN10, PN16
6	D	150	I1	130			
7	D1	110	I2	58			Refulare
8	D2	100	I3	81			DN 40
9	D3	84	L	250			PN6, PN10, PN16
10	D4	42	M	M12			
11	H	454					

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

06/18/2026