

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Expeditor

Cod articol : **Customer pos. no.:**

60167448

Articol:

KDNE 50-160/145/A/BAQE/1/7.5/2 T MCE110/P IE3

Date pompa

Diametru rotor: 145 mm
Coupling : Standard

MEI $\geq 0,50$

Presiune nominala: PN 16

Temperatura min. fluid -10 °C

Temperatura max. fluid 140 °C

Temperatura max. ambianta 40 °C

Date de functionare cerute

Debit :

Înăltime de pompare :

Fluid pompat (%) :

Temperatura fluid: 20 °C

Densitate 998.3 kg/m³

Vascozitate cinematica: 1.005 mm²/s

Presiune de vapori: 2.34 kPa

Date disponibile:

Debit :

Înăltime de pompare :

Materiale

Corp pompa Fonta 200 UNI ISO 185
Rotor Fonta 200 UNI ISO 185
Arbore pompa AISI 420 - UNI 6900/71
Garnitura OR Viton
Disc suport etansare Fonta 200 UNI ISO 185
Etansare mecanica SEE "SHAFT SEAL" SECTION
Distanțier de etansare AISI 304 - UNI 6900/71



Etansare mecanica

Type Cauciuc
Stationary part Carbură de siliciu
Rotating part Carbon
Elastomer EPDM

Date motor

Putere nominala P2: 7.5 kW
Viteza nominala: 2900 1/min
Tensiune nominala : 3~ 400 V 50 Hz
Curent de intrare: 17.6 A
Grad de protectie motor: IP 55

Curve tolerance according to ISO 9906

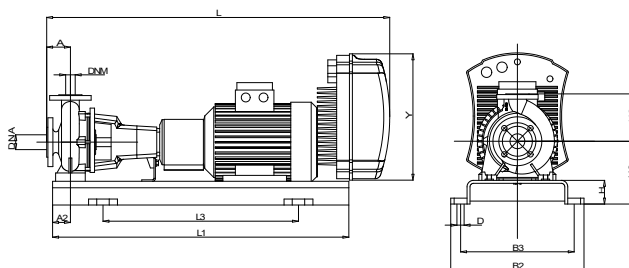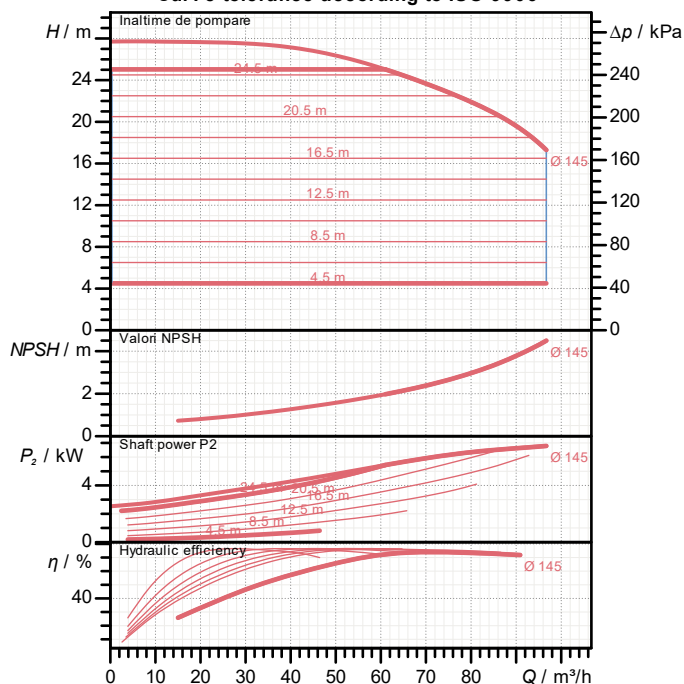

Masa 190 kg

Dimensiuni de gabarim

A	100	H2	180		
A2	60	H3	240		
B2	490	L	-		
B3	440	L1	1120		
D	24	L3	740		
DNA	65	Y	426		
DNM	50				
H	80				


Racorduri pompa:

Partea cu aspiratia: DN 65 / PN 16
Partea cu refularea: DN 50 / PN 16

Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

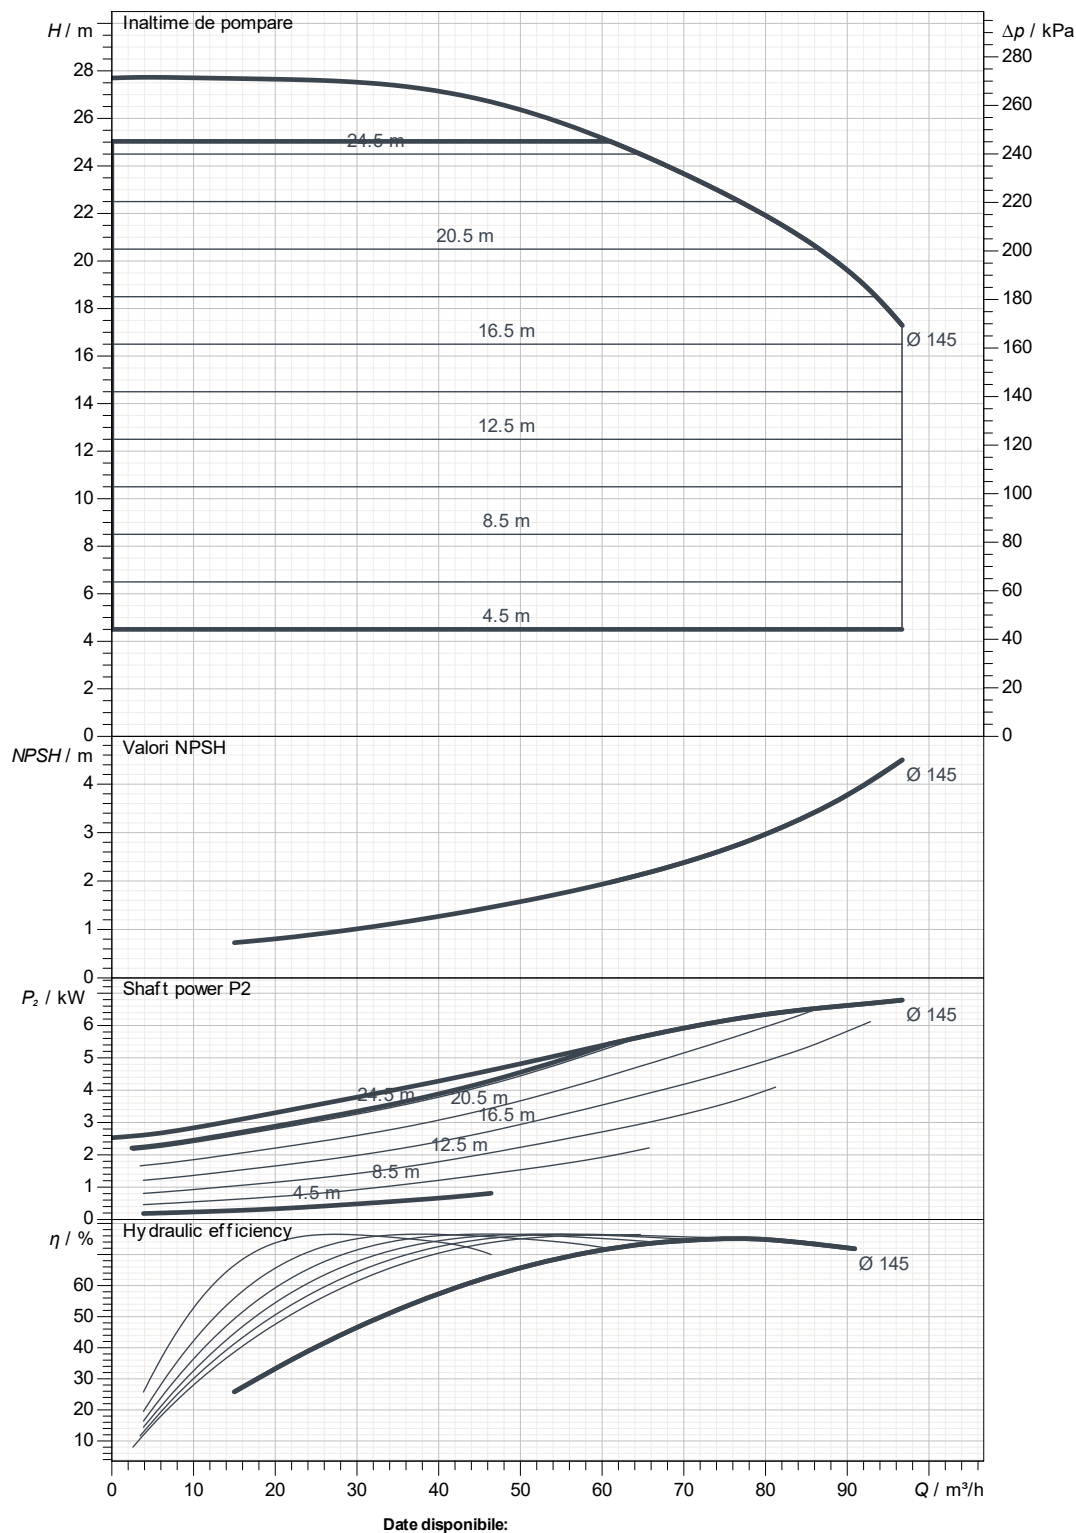KDNE 50-160/145/A/BAQE/1/7.5/2 TMCE110/P IE3
Curve tolerance according to ISO 9906


Partea cu aspiratia:

DN 65

PN 16

Partea cu refularea:

DN 50

PN 16

Debit :

Înăltime de pompare :

Viteza nominala:

2900 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

05/13/2024



DESEN DIMENSIONAL

05/13/2024


Pagina 3 / 3

DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

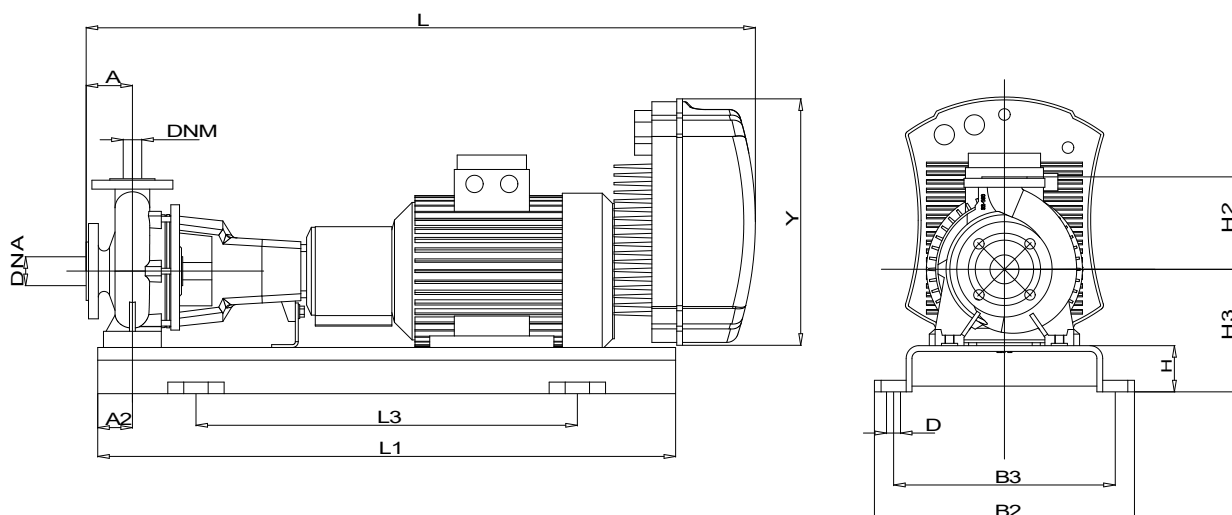KDNE 50-160/145/A/BAQE/1/7.5/2 T MCE110/P IE3

Dimensiuni in mm

Racorduri pompa:

1	A	100	L1	1120			
2	A2	60	L3	740			Aspiratie
3	B2	490	Y	426			DN 65
4	B3	440					PN 16
5	D	24					
6	DNA	65					
7	DNM	50					Refulare
8	H	80					DN 50
9	H2	180					PN 16
10	H3	240					
11	L	-					

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

05/13/2024