

## DH-HAC-HFW2120E

---

### 1.4Megapixel 720P Water-proof HDCVI IR-Bullet Camera



#### Features

- 1/3" 1.4Megapixel CMOS
- 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and standard definition switchable
- OSD Menu, control over coaxial cable
- DWDR, Day/Night(ICR), AWB, AGC, BLC, 3D-DNR
- 6mm fixed lens (2.8 mm, 3.6mm, 8mm optional)
- Max. IR LEDs length 40m, Smart IR
- IP67, DC12V


# DH-HAC-HFW2120E

## Technical Specifications


Model	DH-HAC-HFW2120EP	DH-HAC-HFW2120EN
<b>Camera</b>		
Image Sensor	1/3" 1.4Megapixel CMOS	
Effective Pixels	1305(H)×1049(V)	
Electronic Shutter	1/3s~1/100,000s	
Video Frame Rate	25/50fps@720P	30/60fps@720P
Synchronization	Internal	
Mini. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on	
Video Output	1-channel BNC HDCVI high definition video output/ CVBS standard definition video output (Can switch)	
<b>Camera Features</b>		
Max. IR LEDs Length	40m, Smart IR	
Day/Night	Auto(ICR)/ Color/ B/W	
Noise Reduction	2D/3D	
OSD Menu	Support	
<b>Lens</b>		
Focal Length	6mm (2.8mm, 3.6mm, 8mm optional)	
Angle of View	H: 46° (91.6° /72.3° /34.8°)	
Mount Type	M12	
<b>General</b>		
Power Supply	DC12V±20%	
Power Consumption	Max 5.3W	
Working Environment	-30°C~+60°C / Less than 95%RH (no condensation)	
Transmission Distance	Over 800m via 75-3 coaxial cable	
Ingress Protection	IP67	
Dimensions(W×D×H)	180mm×70mm×70mm	
Weight	0.4kg	
Material	Metal	

# DH-HAC-HFW2120E

## Dimensions (mm)

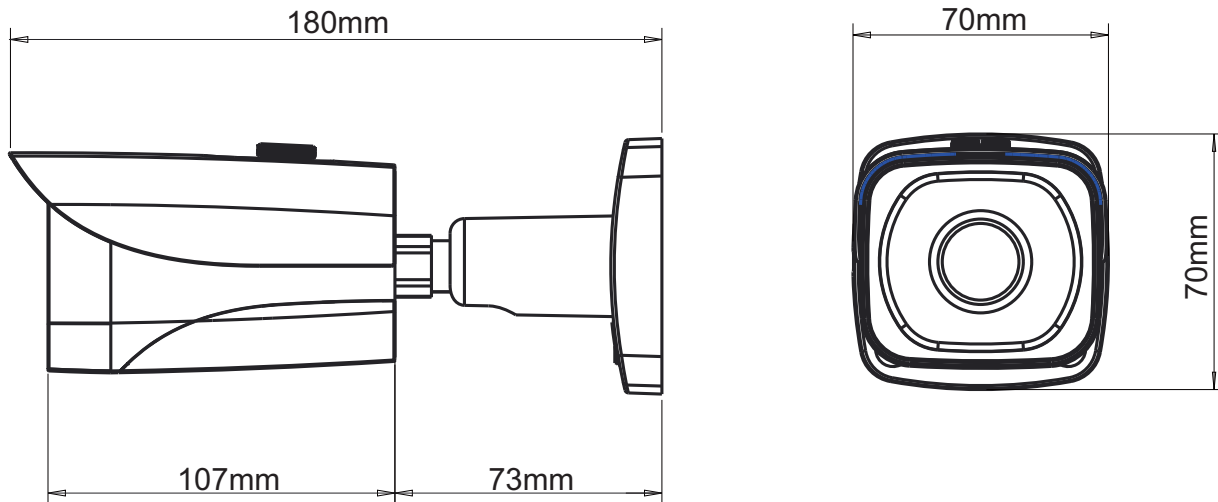

## Accessories (optional)

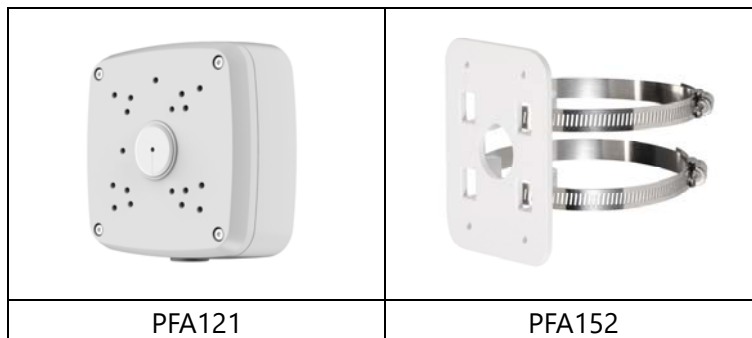

### Securitem Ltd.

Via del Commercio 1 20851  
Lissone (MB) - Italy  
Tel: +39-0362-1855440  
Fax: +39-02-45503999  
Email: [info@setik.biz](mailto:info@setik.biz)  
[www.setik.biz](http://www.setik.biz) - [www.dahua.it](http://www.dahua.it)

\*Design and specifications are subject to change without notice.

© 2013 Dahua Technology Co., Ltd.